


# Bergmann Dumper

## 2050 Three way



### Strong arguments for your advantage

- ▶ high stability by oscillating axle
- ▶ hydraulic park brake
- ▶ instrument board lowerable and lockable
- ▶ type test approval by TBG

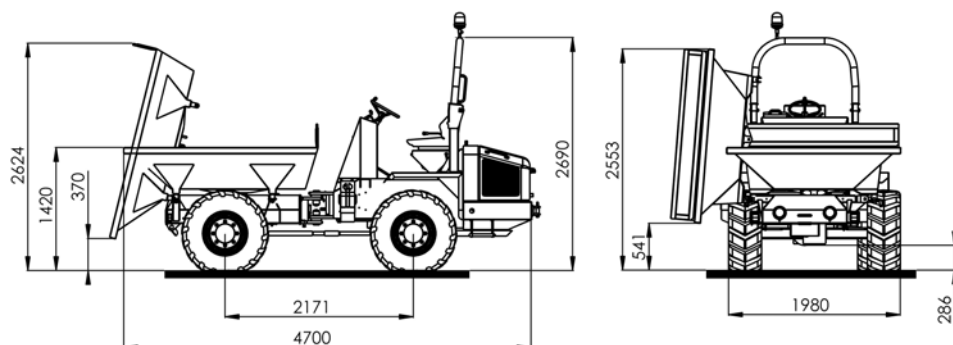



# Bergmann Dumper 2050 three-way-tipping

## Technical Data

<b>Weight/ bucket capacity</b>	Payload	5.000 kg
	Unladen weight	3.440 kg
	Struck level	1.600 L
	Heaped	2,8 m <sup>3</sup>
	Bucket system	change of sides by simple changing of the plug bolt
<b>Dimensions</b>	Total height	2.690 mm
	Total length	4.700 mm
	Total width	1.980 mm
	Ground clearance	286 mm
<b>Transmission</b>	Hydrostatic 4-wheel-drive with automotive control	
	speed I:	0-10 km/h
	speed II:	0-25 km/h
<b>Steering</b>	Hydraulic articulated steering acting over priority flow	
	Steering angle 40° to each side	
<b>Axles / Brakes</b>	Front axle rigid, rear axle oscillating stored +/- 12°, maintenance-free-oil-bath multi-disc brake with automatic adjustment in the front axle,	
	hydraulically applicated locking brake acting over articulated shaft on front and rear axle.	
<b>Engine</b>	4 cylinder Kubota Diesel engine –water cooled–	
	Output power 50,5 KW at 2.600 rpm.	
<b>Tyres</b>	Standard, 365/70-18 AS Profil	
<b>Tank capacity</b>	Fuel 45 L	
	Hydraulic oil 40 L	
<b>Electrics</b>	12V electrical installation with main switch, control panel for engine	
	water temperature, fuel and service hour meter, control lamps for motor oil; park brake, direction indicator, battery charging control, hydraulic filter, display for drive position	
<b>Standard Equipment</b>	Hydro sprung seat adjustable and collapsible, instrument panel lowerable and lockable with ignition key, tow-bar coupling, lighting system	
	according to German traffic regulations, bucket from abrasion-proof fine-grain steel, EC type test approval, EC declaration of conformity, operator's manual / spare parts list	