

Bergmann Dumper 3012 Rear tip



Strong arguments for your advantage

- high stability thanks to oscillating axle
- swivelling operator's stand
- electro-hydraulical spring type cylinder park brake
- compact dimensions with low weight

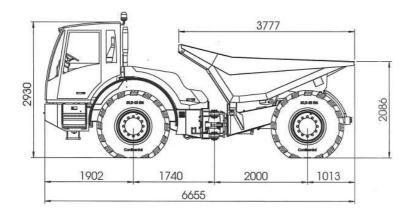





Bergmann Dumper 3012 rear tip

Technical Data

Weight / Bucket capacity	Payload		12.000 kg			
3 .,	Unladen weight				10.020 kg	
	Bucket capacity s	Bucket capacity struck		5.000 l		
	Bucket capacity h	Bucket capacity heaped			ca. 8,5 m ³	
	Bucket system Hydraulical rear tipper					
	,	,				
Dimensions	Height with cabir		2.930 mm			
	Total length Total width			6.650 mm		
				2.5	00 mm	
	Ground clearance		400 mm			
Transmission	Load-depending shift – shiftably by hand and automatically, self-adjusting					
Transmission	optimisation of traction force and spped, speed control stepless forward and					
		backwards, ZF-Ergo-Power transmission				
	odekwards, zr zr	go i ower eransimission				
	1. gear F	- 5 km/h	2. gear	F	- 9 km/h	
	3. gear F	- 14 km/h	4. gear	F	- 21 km/h	
	5. gear F	- 32 km/h	6. gear	F	- 40 km/h	
	1. gear R	- 6 km/h	2. gear	R	- 14 km/h	
	3. gear R	- 34 km/h				
Steering	Hydraulical articulated steering acting over priority valve					
Secting	articulation: 37° left & right					
	articulation. 37	ert et rigitt				
Axles / brakes	Front axle hydraulically absorbed, rear axle fix, maintenance-free-oil-bath multi- disc brake in the wheel hubs with self-locking differential with a locking value of 45 %, hydraulically applicated spring-type cylinder locking brake acting over articulated shaft on front and rear axle.					
Facing	4 audioday Dayte	Diesel engineeter e	a a la d			
Engine	4-cylinder Deutz Diesel engine -water cooled- power 119 KW with 2.200 rpm					
	power 119 KW W	power 119 KW With 2.200 rpm				
Tyres	Standard 20.5 R 25 double coin					
Tyles						
Bonnet	Easy access to all	Easy access to all maintenance and service points thanks to wide opening				
	sectioned bonnet	sectioned bonnet				
Tank capacity	Fuel 190 L					
	Hydraulic oil 81 L					
Floatrica	241/ -1		4		£	
Electrics		24 V electric system with main switch, fault finding modus, fuel and hour counter,				
	control lamps for engine oil, parking brake, driving direction display, battery charging control, hydraulic filter, display for drive position					
	charging control,	nyuraunc miter, display	TOT UTIVE	position		
Standard equipment	Comfortable driver's cab with air-suspended driver's seat, swivelling operator's					
Jeanuaru equipment	stand, lighting system according to German traffic regulations, bucket from					
		abraision proof fine grain steel, flashing yellow light, cigarette lighter, roller blind				
		for front windscreen, device for radio, loudspeaker and antenna				
	EC declaration of					
		,				