



BOMAG
FAYAT GROUP

Tandem Vibratory Roller

BW284AD



EARTHWORKS

# passes	rolling speed	area coverage sq yd/hr	“productivity in cu yd/hr by lift thickness, 100% efficiency”			
	(mph)		4 inches	6 inches	8 inches	12 inches
2	4.54	9322	1037	1556	2075	3112
3	4.54	6215	692	1037	1383	2075
4	4.54	4661	519	778	1037	1556
5	4.54	3729	415	622	830	1245

ASPHALTIC CONCRETE (material weight 140 lb/cu ft)

# passes	rolling speed	area coverage sq yd/hr	“productivity in tons/hr by lift thickness, 100% efficiency”			
	(mph)		1.5 inches	2 inches	2.5 inches	3 inches
2	4.54	9322	735	980	1225	1470
3	4.54	6215	490	653	817	980
4	4.54	4661	368	490	613	735
5	4.54	3729	294	392	490	588
6	4.54	3107	245	327	408	490


Note: Repeat number of passes over the same area is required to achieve specified compaction efficiency/density. Successive passes over same area results in reduced area coverage and productivity. Rolling speed selected provides impact spacing of a minimum 10 impacts per foot at high vibration frequency setting. Actual compaction efficiency is determined by job conditions.

www.bomag.com/us



BW284AD

Designed to deliver production, smoothness and density in the fewest number of passes.

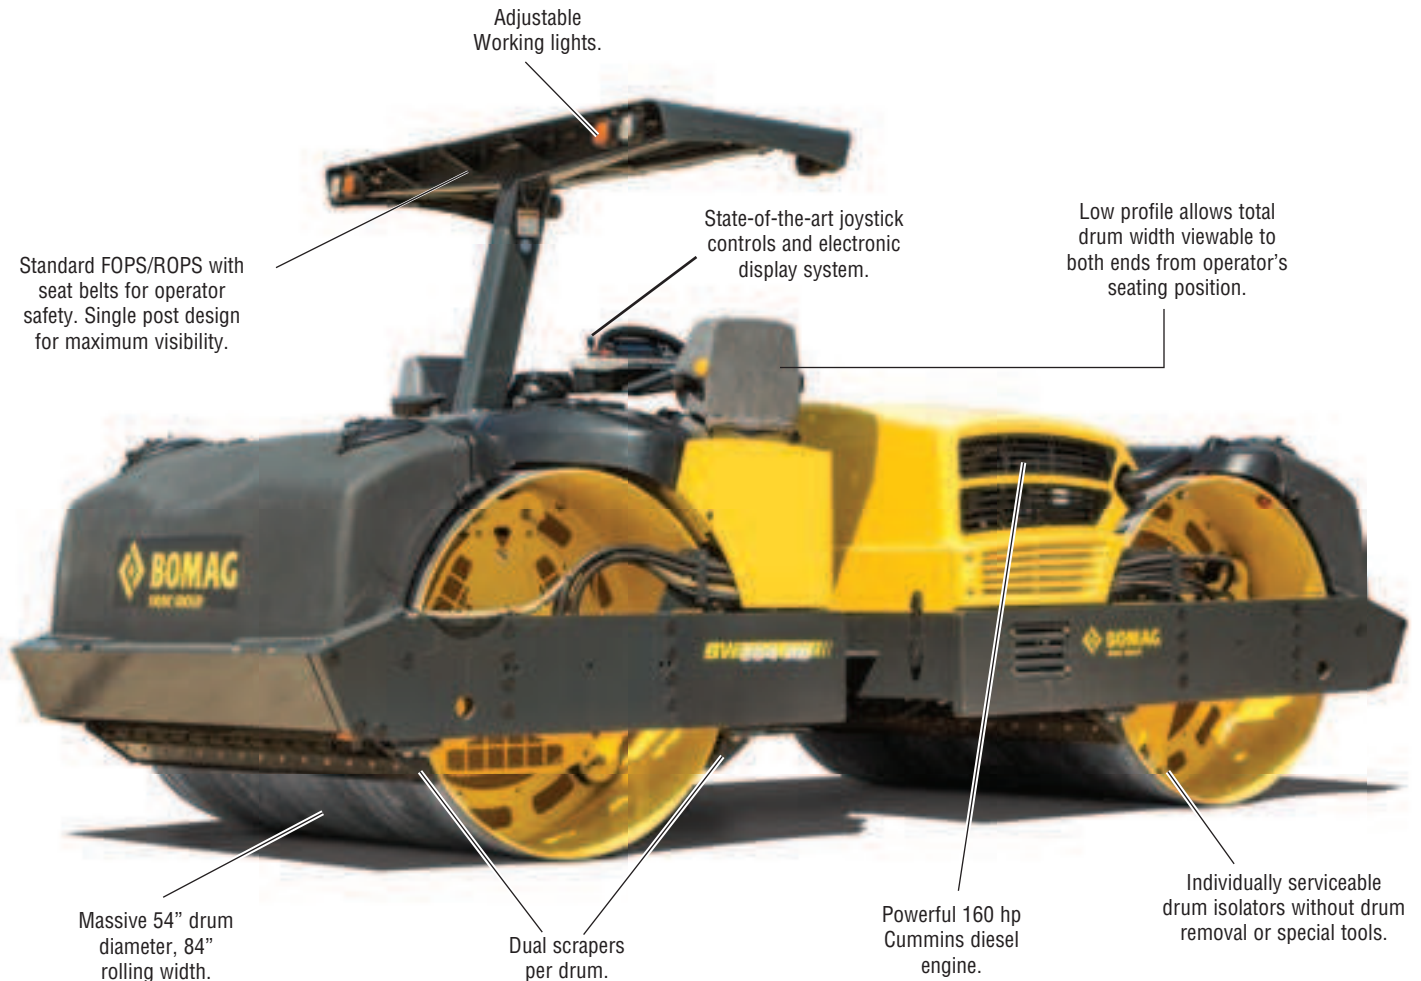

■ *Equipped to handle a wide range of compaction applications...*

The BOMAG BW284AD tandem roller is designed to handle the largest and toughest paving situations. Designed specifically for the rigorous demands of SUPERPAVE applications, with large diameter 54" drums, which minimize shoving of material, and an 84" rolling width, this model has the capability for high production results. With a maximum compaction output force of 41,235 lbs. per drum and available 4,000 vpm frequency, required densities are achieved in fewer roller passes. Combine this with exceptional operating visibility and cutting edge control functions and features, the BW284AD roller will meet and exceed your every expectation.

■ Applications:

- Highway construction and maintenance
- Airports
- Parking lots
- Asphalt repairs and resurfacing



84" rolling width with available 4,000 vpm frequency.



Direct drum drive with vibrating travel speeds of 4.5 mph available. Individually serviceable isolators without drum removal.

Improved compaction performance and operator comfort

■ Less Service and Maintenance:

The purchase price is important, but so are the operating costs. Check these features:

- Easy On / Off water spray nozzles.
- High capacity (170 gallons / each) impact resistant water tanks provide a low center of gravity, dual fill ports for convenient filling from either side and primary strainers as well as suction filtration to minimize spray nozzle plugging.
- Dual rubber drum scrapers per drum, minimize asphalt pick-up and help distribute water across the entire 84" wide rolling surface.
- Centerjoint is totally maintenance free, providing + / - 28 degrees articulation for high maneuverability and + / - 12 degrees of frame oscillation to insure maximum drum contact on uneven paving surfaces.
- Access to the Cummins engine for maintenance is simple and quick, with strategically located components and test ports grouped for easy access.
- Drum vibration bearings, as well as travel motor(s) integral SAHR brakes, are virtually maintenance free.

■ Handling is Easier & Safer:

- Operator's station provides excellent visibility to both the surrounding jobsite area as well as the drum(s) rolling surface and edges.
- Operator's platform is vibration isolated to provide a fatigue-free working environment.
- Operator's seats swivel right to left to provide a safer, more comfortable viewing angle of the work area.
- Joystick controls provide for accurate and comfortable roller operation.
- Operator's control console adjusts to virtually all size operators, to insure a comfortable and productive seating position.
- Large diameter 54" drums minimize material shoving.
- Information display provides critical operating details to insure successful and productive paving results.

Best for
COMPACTION



Waterspray system is further protected by fill port strainer and in-tank suction filtration. Fill port cover is lockable for vandal protection.



Operator's control panel is fully adjustable to either seating position. Simplified controls make operation easy to novice, as well as experienced operators. Display panel provides all necessary, as well as critical information for proper machine operation and professional results.

*With these features and many more, it's
easy to see why this model maintains a
high residual value while delivering
lower lifetime operating costs.*


Technical Specifications

BW284AD

Shipping dimensions

in cubic feet (m3)
BW284AD

with ROPS/FOPS
1186.8 (33.6)

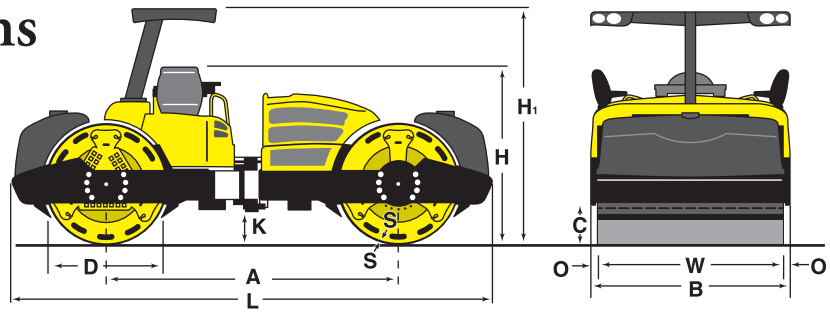

Standard Equipment

- ☒ Cummins QSB4.5 diesel engine
- ☒ Hydrostatic travel and vibration drive
- ☒ Centerpoint articulated steering
- ☒ Spring Applied Hydraulically Released (SAHR) brakes on each drum
- ☒ Dual seating position with swiveling seats
- ☒ Adjustable operators seat
- ☒ Vibration isolated operators station
- ☒ Vibration control in travel lever
- ☒ Manual waterspray control in steering lever
- ☒ Water saver system
- ☒ Auto waterspray "on / off" with travel speed
- ☒ Infinitely adjustable vibration frequencies to 4,000 VPM's
- ☒ Dual vibration amplitudes
- ☒ Auto / manual vibration modes
- ☒ Auto vibrator "on / off" set point
- ☒ Speed control electronically adjustable
- ☒ Impact spacing selection feature
- ☒ Lead / trail drum selection
- ☒ Asphalt mat temperature display
- ☒ Speedometer
- ☒ Drum vibration frequency display
- ☒ Single waterspray system per drum
- ☒ Engine monitor at dash display
- ☒ FOPS / ROPS with seat belts
- ☒ Working lights / directional / hazard signals – std.
- ☒ Cooler storage / cup holders

Optional Equipment

- ☐ Night paving light system
- ☐ Special paint

DIMENSIONS IN INCHES (MM)

	A	B	C	D	H	H ₁	K	L	O	S	W
BW284AD	130 (3302)	90 (2286)	18 (457)	54 (1372)	81 (2057)	106 (2692)	18 (457)	215 (5461)	3.0 (76)	.07 (18)	84 (2134)

Technical data

BOMAG
BW284AD

Weights

Operating Weight with ROPS/FOPS	lbs (kg)	28425 (12893)
Average axle load CECE	lbs (kg)	14213 (6447)
Average static linear load CECE	pli (kg/cm)	169 (30.2)

Driving Characteristics (depending on site conditions)

Speed	mph (kmph)	0-5/0-10 (0-8.0/0-16.1)
Max. gradeability without/with vibration	%	30/30

Drive

Engine manufacturer	Cummins	
Type	QSB4.5	
Tier compliance	Tier 3	
Cooling	water	
Number of cylinders	4	
Fuel	diesel	
Performance SAE J1349 (max)	hp (kW)	160 (119)
Speed (max)	rpm	2200
Electric Equipment	V	12
Drive System	hydrostatic	
Drum Driven	f + r	

Brakes

Service brake	hydrostatic
Parking brake	SAHR

Steering

Steering system.....	oscil./artic.
Steering angle +/-.....degrees	28
Oscillating angle +/-.....degrees	12
Track Radius, inner/outer.....in (mm)	165/249 (4191/6325)

Vibratory system

Vibrating drum	f + r, f/r
Drive system	hydrostatic
Frequency	vpm (Hz)
Amplitude	in (mm)
Centrifugal force (each drum)	lbs (kN)

Water Spray System

Type of water spray system	pressurized
----------------------------	-------------

Capacities

Fuel	gal (l)	75 (283.9)
Water	gal (l)	340 (1287)

Technical modifications reserved. Machines may be shown with options.

B631H-3631 1M1113TTTPG