



PROVEN PERFORMANCE PASSED DOWN.

PRODUCTIVITY-BOOSTING ADVANTAGES.

At Hitachi, efficiency, reliability and durability are in our genes – built into our large mining excavators and passed down to our line of construction excavators. So you get maximum performance, no matter which Hitachi excavator you’re running. And the ZX670LC-6 and ZX870LC-6, our largest production-class excavators, are no exceptions.

These models feature a fuel-efficient EPA Final Tier 4 (FT4)/EU Stage IV Isuzu engine that meets rigid emission standards. The best part? No diesel particulate filter (DPF) is needed. You also get generous swing torque, digging force and lift capacity. Convenient machine access with steps and upperstructure walkways. Easy-to-operate controls for smooth and responsive hydraulics. Highly efficient cooling system. And simplified maintenance with features like a battery disconnect switch and engine and hydraulic oil sample ports. Add it all up, and the ZX670LC-6 and ZX870LC-6 are...

POWERFUL WORKHORSES.



MORE WORK DONE, MORE EFFICIENTLY.

RELIABLE PERFORMANCE.

The ZX670LC-6 and ZX870LC-6 take productivity to a higher level. Our HIOS III hydraulic system perfectly balances engine performance with hydraulic flow. The hydraulic boost system and enhanced boom recirculation generate aggressive boom and arm speed – returning the arm to dig faster, so you can move more dirt in a day.

Three modes provide efficient power to fit the task. High Productivity (H/P) delivers more power and faster hydraulic response. Power (PWR) delivers a balance of power and speed, plus fuel economy for normal operation. Economy (ECO) maximizes fuel efficiency while delivering an enhanced level of productivity.

Need extra stability or lift capacity? Choose from a wide variety of track widths, arm lengths, boom lengths and bucket sizes.

With the ZX670LC-6 and ZX870LC-6, you get...

PRODUCTIVITY ON A HIGHER LEVEL.

- It's not always about brute force. Unmatched metering and smooth multifunction operation provide finesse and precision.
- Stay on schedule with generous swing torque, digging force and lift capacity.
- Muscle through tough digging by pressing the power-boost button.
- An added coolant expansion tank provides make-up fluid when needed and improves cooling system efficiency, keeping the engine at peak performance.

MAXIMUM COMFORT. MAXIMUM PRODUCTIVITY.

COMFORTABLE AND SAFE CAB.

It's true – a more comfortable operator is more productive and efficient. And the ZX670LC-6 and ZX870LC-6 keep operators focused on the job. Silicone-filled cab mounts provide isolation from noise and vibration. An LCD monitor provides access to a wealth of performance information and functions. Operators will also appreciate the wide entryway, fully adjustable high-back sculpted seat, storage space and generous legroom. Unsurpassed visibility, ergonomically placed low-effort joysticks, a highly efficient HVAC system, plus other features contribute to...

COMFORTABLE PRODUCTIVITY.



■ Multi-language LCD monitor and rotary dial provide easy access to machine info and functions. Turn and tap to select work modes, monitor maintenance intervals, check diagnostic codes and set cab temperature. Control oil flow and toggle between dig and thumb modes with a programmable thumb attachment mode.



■ Ergonomically correct short-throw pilot levers provide smooth, precise control with less effort.



■ Get unobstructed all-around visibility thanks to a wide expanse of front, side and overhead glass and mirrors.



■ Cab-mounted lights, two boom-mounted lights and a rearview camera provide excellent job site visibility, regardless of when or where you work.

■ The ZX670LC-6 and ZX870LC-6 are standard equipped with five years of ZXLink™ Ultimate, which gives you 24/7 online access to machine locations, health, utilization, fuel consumption and other valuable information.

■ Automatic, high-velocity bi-level climate-control system with automotive-style adjustable louvers helps keep the glass clear, the cab comfortable and the operator productive.

■ Operators get maximum support from a heated, air suspension high-back seat.

LESS MAINTENANCE TIME.
MORE UPTIME.

SIMPLE SERVICING.

The ZX670LC-6 and ZX870LC-6 are equipped with time-saving and productivity-boosting advantages — from grouped service points to at-a-glance gauges. You get convenient machine access with steps, handrails and walkways. Extended service intervals lower daily operating costs. Scheduled maintenance is easy to track using ZXLink™ and the in-cab diagnostic monitor. These models work hard so you have...

LOWER OPERATING COSTS.

EFFICIENT

■ Step positioning on the track frame and walkways on the upperstructure allow for easy access around the machine while maintaining appropriate points of contact.

■ Auto-idle, which reduces engine speed when hydraulics aren't in use, and auto-shutdown contribute to fuel efficiency.

■ A battery disconnect switch, located in the battery box on the right side of the machine, is easily accessible and extends battery life.

■ The FT4 engine solution does not require a diesel particulate filter (DPF), saving service time and lowering operating costs. Fluid consumption (fuel and diesel exhaust fluid [DEF]) is equal or reduced compared to ZX670LC-5 or ZX870LC-5 (Interim Tier 4/EU Stage IIIB) consumption.



■ Easy-to-navigate LCD monitor tracks various fluid levels and issues, scheduled maintenance alerts and diagnostic information.



■ Centralized lube banks place zerks within easy reach, making greasing less messy and time-consuming.



■ Easily installed spin-on main fuel filters help prevent contamination when servicing. Two additional water separators help extend fuel filter life.



■ A reversing fan back-blows cooler cores to reduce debris buildup and increase uptime.

DURABILITY BUILT-IN,
DOWNTIME TOSSED OUT.

TACKLE TOUGH JOBS.

Toughness is built into the ZX670LC-6 and ZX870LC-6 with a heavy-duty undercarriage and durable D-channel mainframe. Added strength comes from welded bulkheads within the boom that resist torsional stress.

The boom, arm and mainframe are so tough, they’re warranted for three years or 10,000 hours, whichever comes first. Add it all up, and these models give you...

DEPENDABLE DURABILITY.

■ Our FT4 field-proven technology is simple and efficient, employing cooled exhaust gas recirculation (EGR), a diesel oxidation catalyst (DOC) and selective catalytic reduction (SCR). An improved piston design allows particulate matter to be burned in cylinder, so there’s no need for a DPF.

■ With large idlers, rollers and strutted track links, the sealed and lubricated undercarriage is built for the long haul.

■ Swing-out coolers, protected behind heavy-duty hinged doors, are easy to access and clean.


■ Thick-plate single-sheet mainframe, box-section track frames and industry exclusive double-seal swing bearings deliver rock-solid durability.

■ Engine and hydraulic oil sample ports allow for quick and convenient, proactive maintenance checks, which keep you running longer.


Engine				ZX670LC-6
Manufacturer and Model				Isuzu 6WGI-FT4
Non-Road Emission Standard				EPA Final Tier 4/EU Stage IV
Net Rated Power (ISO 9249)				345 kW (463 hp) @ 1,800 rpm
Cylinders				6
Displacement				15.68 L (957 cu. in.)
Off-Level Capacity				70% (35 deg.)
Aspiration				Turbocharged, air-to-air charge-air cooler
Cooling				
2 cool-on-demand hydraulic-driven, suction-type fans with remote-mounted drives				
Powertrain				
2-speed propel				
Maximum Travel Speed				
Low				3.6 km/h (2.2 mph)
High				5.2 km/h (3.2 mph)
Drawbar Pull				46 115 kg (101,666 lb.)
Hydraulics				
Open center, load sensing				
Main Pumps				2 variable-displacement pumps
Maximum Rated Flow				489 L/m (129 gpm) x 2
Pilot Pump				One gear
Maximum Rated Flow				30 L/m (7.9 gpm)
Pressure Setting				3900 kPa (566 psi)
System Operating Pressure				
Circuits				
Implement				31 900 kPa (4,627 psi)
Travel				34 300 kPa (4,975 psi)
Swing				29 400 kPa (4,264 psi)
Power Boost				34 300 kPa (4,975 psi)
Controls				Pilot levers, short-stroke, low-effort hydraulic pilot controls with shutoff lever
Cylinders				
Heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins				
	Bore	Rod Diameter	Stroke	
Boom (2)	191 mm (7.5 in.)	130 mm (5.1 in.)	1806 mm (71 in.)	
Arm (1)	201 mm (7.9 in.)	140 mm (5.5 in.)	2164 mm (85 in.)	
Bucket (1)	180 mm (7.1 in.)	130 mm (5.1 in.)	1555 mm (61 in.)	
Electrical				
Number of Batteries (12 volt)				2
Battery Capacity				500 CCA
Alternator Rating				50 amp
Work Lights				5 halogen (1 mounted on frame, 2 mounted on boom and 2 mounted on top of cab)
Undercarriage				
Rollers (each side)				
Carrier				3
Track				8
Double-Bar Grouser Shoes (each side)				47
Track				
Adjustment				Hydraulic
Guides				Front and center
Chain				Sealed and lubricated
Planetary Final Drives with Axial Piston Motors				

Ground Pressure		ZX670LC-6
650-mm (26 in.) Double-Bar Grouser Shoes		104.2 kPa (15.1 psi)
750-mm (30 in.) Double-Bar Grouser Shoes		90.3 kPa (13.1 psi)
900-mm (36 in.) Double-Bar Grouser Shoes		75.3 kPa (10.9 psi)
Swing Mechanism		
Swing Speed		9.1 rpm
Swing Torque		206 000 Nm (151,938 lb.-ft.)
Serviceability		
Refill Capacities		
Fuel Tank		900 L (238 gal.)
Diesel Exhaust Fluid (DEF) Tank		95 L (25.1 gal.)
Cooling System		76 L (20.1 gal.)
Engine Oil with Filter		57 L (15.1 gal.)
Hydraulic Tank		380 L (100.4 gal.)
Hydraulic System		750 L (198.1 gal.)
Gearbox		
Swing (each)		10.5 L (11.1 qt.)
Travel (each)		16 L (16.9 qt.)
Pump Drive		6.2 L (6.6 qt.)
Operating Weights		
With full fuel tank; 79-kg (175 lb.) operator; 3.09-m³ (4.04 cu. yd.), 1370-mm (54 in.), 3126-kg (6,892 lb.) bucket; 4.2-m (13 ft. 9 in.) arm; 9800-kg (21,605 lb.) counterweight; counterweight removal device; and 900-mm (36 in.) double-bar grouser shoes		
SAE Operating Weight		69 900 kg (154,103 lb.)
Components		
Undercarriage w/ Double-Bar Grouser Shoes		
650 mm (26 in.)		26 953 kg (59,421 lb.)
750 mm (30 in.)		27 333 kg (60,259 lb.)
900 mm (36 in.)		28 353 kg (62,508 lb.)
One-Piece Boom (with arm cylinder)		
7.8 m (25 ft. 7 in.)		6560 kg (14,462 lb.)
6.8-m (22 ft. 4 in.) Mass Excavating		6130 kg (13,514 lb.)
Arm with Bucket Cylinder and Linkage		
3.6 m (11 ft. 10 in.)		3640 kg (8,025 lb.)
4.2 m (13 ft. 9 in.)		3840 kg (8,466 lb.)
5.3 m (17 ft. 5 in.)		3620 kg (7,981 lb.)
2.9-m (9 ft. 6 in.) Mass Excavating		3715 kg (8,190 lb.)
Boom-Lift Cylinders (2), Total Weight		1135 kg (2,502 lb.)
Counterweight with Standard Mainframe		10 400 kg (22,928 lb.)


Operating Dimensions		ZX670LC-6			
Arm Length		3.6 m (11 ft. 10 in.) w/ 7.8-m (25 ft. 7 in.) Boom	4.2 m (13 ft. 9 in.) w/ 7.8-m (25 ft. 7 in.) Boom	5.3 m (17 ft. 5 in.) w/ 7.8-m (25 ft. 7 in.) Boom	2.9-m (9 ft. 6 in.) Mass Excavating w/ 6.8-m (22 ft. 4 in.) Mass-Excavating Boom
Arm Digging Force					
SAE		247 kN (55,528 lb.)	224 kN (50,357 lb.)	192 kN (43,163 lb.)	297 kN (66,768 lb.)
ISO		255 kN (57,326 lb.)	231 kN (51,931 lb.)	196 kN (44,063 lb.)	306 kN (68,792 lb.)
Bucket Digging Force					
SAE		290 kN (65,195 lb.)	290 kN (65,195 lb.)	245 kN (55,078 lb.)	332 kN (74,637 lb.)
ISO		324 kN (72,838 lb.)	324 kN (72,838 lb.)	277 kN (62,272 lb.)	369 kN (82,954 lb.)
A	Maximum Reach	13.25 m (43 ft. 6 in.)	13.85 m (45 ft. 5 in.)	14.74 m (48 ft. 4 in.)	11.81 m (38 ft. 9 in.)
A'	Maximum Reach at Ground Level	13 m (42 ft. 8 in.)	13.61 m (44 ft. 8 in.)	14.51 m (47 ft. 7 in.)	11.50 m (37 ft. 9 in.)
B	Maximum Digging Depth	8.53 m (28 ft.)	9.15 m (30 ft.)	10.03 m (32 ft. 11 in.)	7.12 m (23 ft. 4 in.)
B'	Maximum Digging Depth at 2.44-m (8 ft.) Flat Bottom	8.40 m (27 ft. 7 in.)	9.03 m (29 ft. 8 in.)	9.92 m (32 ft. 7 in.)	6.97 m (22 ft. 10 in.)
C	Maximum Cutting Height	11.92 m (39 ft. 1 in.)	12.24 m (40 ft. 2 in.)	12.65 m (41 ft. 6 in.)	11.92 m (39 ft. 1 in.)
D	Maximum Dumping Height	8.05 m (26 ft. 5 in.)	8.33 m (27 ft. 4 in.)	9.17 m (30 ft. 1 in.)	7.33 m (24 ft. 1 in.)
E	Minimum Swing Radius	5.78 m (19 ft.)	5.76 m (18 ft. 11 in.)	5.70 m (18 ft. 8 in.)	5.24 m (17 ft. 2 in.)
F	Maximum Vertical Wall	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)	9.17 m (30 ft. 1 in.)	5.28 m (17 ft. 4 in.)
G	Tail Swing Radius	4.02 m (13 ft. 2 in.)	4.02 m (13 ft. 2 in.)	4.02 m (13 ft. 2 in.)	4.02 m (13 ft. 2 in.)

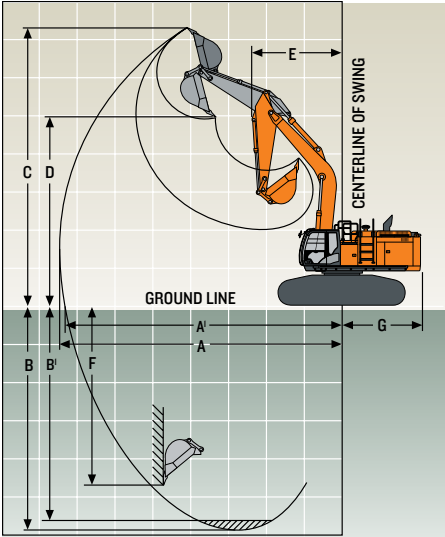

Machine Dimensions		ZX670LC-6	
A	Overall Length w/ Arm		
	3.6 m (11 ft. 10 in.)		13.40 m (44 ft.)
	4.2 m (13 ft. 9 in.)		13.40 m (44 ft.)
	5.3 m (17 ft. 5 in.)		13.25 m (43 ft. 6 in.)
	2.9-m (9 ft. 6 in.) Mass Excavating with Mass-Excavating Boom		12.42 m (40 ft. 9 in.)
B	Overall Height w/ Arm		
	3.6 m (11 ft. 10 in.)		4.46 m (14 ft. 8 in.)
	4.2 m (13 ft. 9 in.)		4.98 m (16 ft. 4 in.)
	5.3 m (17 ft. 5 in.)		5.28 m (17 ft. 4 in.)
	2.9-m (9 ft. 6 in.) Mass Excavating with Mass-Excavating Boom		4.96 m (16 ft. 3 in.)
C	Rear-End Length		3.91 m (12 ft. 10 in.)
D	Distance Between Idler/Sprocket Centerline		4.59 m (15 ft. 1 in.)
E	Undercarriage Length		5.84 m (19 ft. 2 in.)
F	Counterweight Clearance		1.53 m (5 ft.)
G	Upperstructure Width		4.09 m (13 ft. 5 in.)
H	Cab Height		3.55 m (11 ft. 8 in.)
I	Track Width w/ Double-Bar Grouser Shoes		650 mm (26 in.) / 750 mm (30 in.) / 900 mm (36 in.)
J	Gauge Width w/900-mm (36 in.) Double-Bar Grouser Shoes		
	Operating Position		3.30 m (10 ft. 10 in.)
	Transport Position		2.82 m (9 ft. 3 in.)
K	Ground Clearance		0.86 m (34 in.)
L	Overall Width w/ 900-mm (36 in.) Double-Bar Grouser Shoes		
	Operating Position		4.20 m (13 ft. 9 in.)
	Transport Position		3.73 m (12 ft. 3 in.)

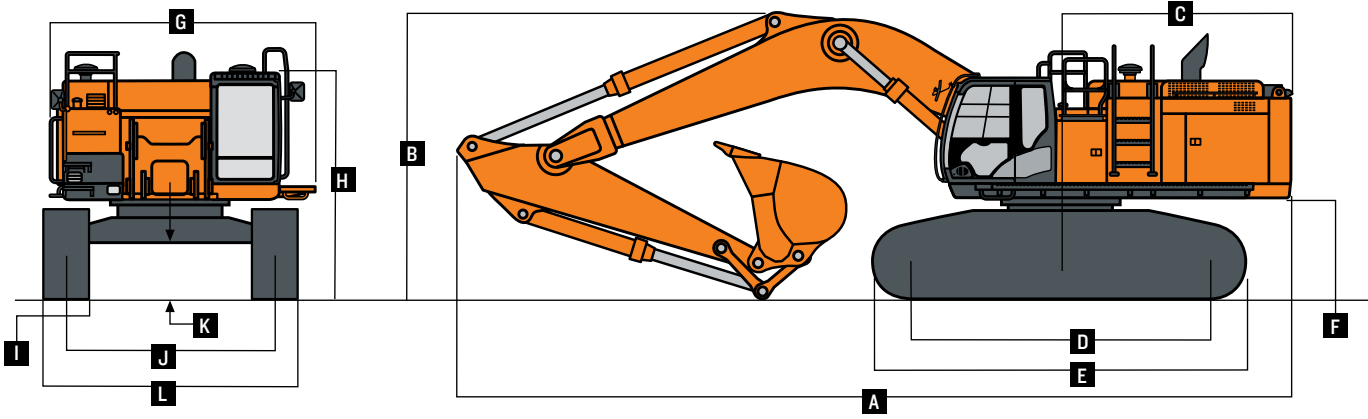

Packing Dimensions and Weights for Transportation				
Base Machine (without front attachment and side frame)*	Length 5.68 m (18 ft. 8 in.)	Height 2.77 m (9 ft. 1 in.)	Overall Width 3.42 m (11 ft. 3 in.)	Weight 21 400 kg (47,179 lb.)
Side Frame**				
650-mm (26 in.) Shoe Width	5.85 m (19 ft. 2 in.)	1.45 m (4 ft. 9 in.)	1.25 m (4 ft. 1 in.)	10 400 kg (22,928 lb.)
750-mm (30 in.) Shoe Width	5.85 m (19 ft. 2 in.)	1.45 m (4 ft. 9 in.)	1.25 m (4 ft. 1 in.)	10 600 kg (23,369 lb.)
900-mm (36 in.) Shoe Width	5.85 m (19 ft. 2 in.)	1.45 m (4 ft. 9 in.)	1.32 m (4 ft. 4 in.)	11 100 kg (24,471 lb.)
Counterweight, Standard Boom	3.36 m (11 ft.)	1.55 m (5 ft. 1 in.)	0.59 m (23 in.)	10 400 kg (22,928 lb.)
6.8 m (22 ft. 4 in.)	7.14 m (23 ft. 5 in.)	2.51 m (8 ft. 3 in.)	1.39 m (4 ft. 7 in.)	6130 kg (13,514 lb.)
7.8 m (25 ft. 7 in.)	8.13 m (26 ft. 8 in.)	2.33 m (7 ft. 8 in.)	1.39 m (4 ft. 7 in.)	6560 kg (14,462 lb.)
Arm				
2.9-m (9 ft. 6 in.) Mass Excavating	4.37 m (14 ft. 4 in.)	1.69 m (5 ft. 7 in.)	0.80 m (31 in.)	3715 kg (8,190 lb.)
3.6 m (11 ft. 10 in.)	5.11 m (16 ft. 9 in.)	1.44 m (4 ft. 9 in.)	0.80 m (31 in.)	3640 kg (8,025 lb.)
4.2 m (13 ft. 9 in.)	5.71 m (18 ft. 9 in.)	1.39 m (4 ft. 7 in.)	0.80 m (31 in.)	3840 kg (8,466 lb.)
5.3 m (17 ft. 5 in.)	6.73 m (22 ft. 1 in.)	1.26 m (4 ft. 2 in.)	0.80 m (31 in.)	3620 kg (7,981 lb.)
Length Less Boom, Arm and Counterweight	6.70 m (22 ft.)	3.68 m (12 ft. 1 in.) / 3.76 m (12 ft. 4 in.) without exhaust stack	3.48 m (11 ft. 5 in.) w/ 650-mm (26 in.) shoes / 3.58 m (11 ft. 9 in.) w/ 750-mm (30 in.) shoes / 3.73-m (12 ft. 3 in.) w/ 900-mm (36 in.) shoes	43 999 kg (97,000 lb.) w/ 650-mm (26 in.) shoes / 44 402 kg (97,890 lb.) w/ 750-mm (30 in.) shoes / 45 404 kg (100,100 lb.) w/ 900-mm (36 in.) shoes
*Steps on the track frame, exhaust stack, side hydraulic oil tank, handrails and upper fuel tank must be removed to comply with the width dimensions above.				
**The dimensions and the weights indicate those of one side frame.				

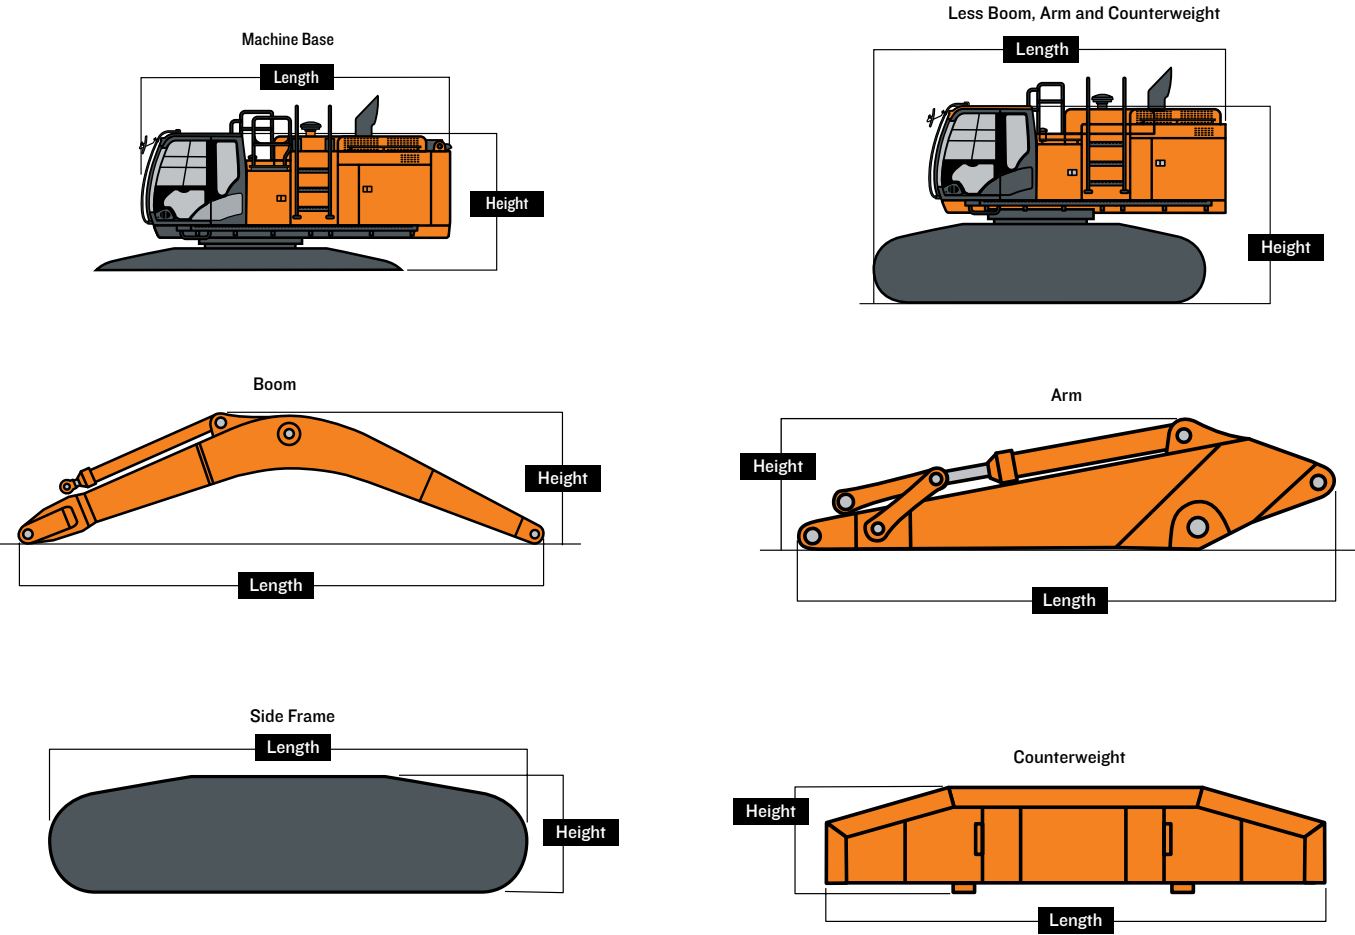

Lift Charts ZX670LC-6													
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).													
Load Point Height	3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	
With 2.5-m³ (3.3 cu. yd.) bucket, 4.2-m (13 ft. 9 in.) arm, 7.8-m (25 ft. 7 in.) boom, and 650-mm (26 in.) double-bar grouser shoes													
7.5 m (25 ft.)									10 880 (23,790)	10 880 (23,790)	6780	6780	
6.0 m (20 ft.)									11 700 (25,460)	11 700 (25,460)	10 070 (20,250)	8980 (19,170)	
4.5 m (15 ft.)			(54,750)	(54,750)	18 420 (39,600)	18 420 (39,600)	14 850 (32,080)	14 850 (32,080)	12 770 (27,710)	11 620 (24,970)	11 490 (25,020)	8760 (18,730)	
3.0 m (10 ft.)					21 780 (46,870)	21 380 (46,090)	16 790 (36,260)	15 010 (32,310)	13 940 (30,190)	11 100 (23,860)	12 150 (26,400)	8450 (18,120)	
1.5 m (5 ft.)					24 280 (52,390)	20 160 (43,420)	18 420 (39,820)	14 250 (30,680)	14 970 (32,420)	10 630 (22,850)	12 040 (25,850)	8170 (17,520)	
Ground Line					14 150 (32,800)	14 150 (32,800)	25 550 (55,260)	19 440 (41,810)	19 470 (42,130)	13 720 (29,510)	15 170 (32,610)	10 270 (22,070)	7950 (17,050)
-1.5 m (-5 ft.)	10 800 (24,430)	10 800 (24,430)	19 890 (45,600)	19 890 (45,600)	25 670 (55,570)	19 120 (41,090)	19 800 (42,840)	13 420 (28,850)	14 940 (32,110)	10 050 (21,610)	11 680 (25,120)	7830 (16,820)	
-3.0 m (-10 ft.)	17 780 (40,170)	17 780 (40,170)	27 900 (63,880)	27 900 (63,880)	24 710 (53,470)	19 090 (41,010)	19 270 (41,640)	13 340 (28,680)	14 880 (32,010)	10 000 (21,520)			
-4.5 m (-15 ft.)	26 090 (59,140)	26 090 (59,140)	29 340 (63,390)	29 340 (63,390)	22 540 (48,600)	19 310 (41,510)	17 630 (37,850)	13 480 (29,010)	13 570 (28,680)	10 180 (21,960)			
-6.0 m (-20 ft.)			23 970 (51,240)	23 970 (51,240)	18 550 (39,460)	18 550 (39,460)	13 910 (28,970)	13 910 (28,970)					
With 3.5-m³ (4.6 cu. yd.) bucket, 2.9-m (9 ft. 6 in.) BE arm, 6.8-m (22 ft. 4 in.) BE boom, and 650-mm (26 in.) double-bar grouser shoes													
7.5 m (25 ft.)							14 400 (31,610)	14 400 (31,610)					
6.0 m (20 ft.)					17 530 (37,890)	17 530 (37,890)	15 280 (33,220)	15 280 (33,220)					
4.5 m (15 ft.)					20 470 (44,110)	20 470 (44,110)	16 700 (36,200)	15 250 (32,780)	14 650 (31,940)	10 920 (23,330)			
3.0 m (10 ft.)					23 430 (50,520)	21 030 (45,280)	18 260 (39,520)	14 580 (31,340)	15 370 (33,390)	10 630 (22,790)			
1.5 m (5 ft.)					25 430 (54,940)	20 100 (43,230)	19 480 (42,140)	14 020 (30,130)	15 260 (32,750)	10 330 (22,160)			
Ground Line					26 020 (56,320)	19 610 (42,140)	19 950 (43,140)	13 670 (29,370)	15 070 (32,390)	10 150 (21,820)			
-1.5 m (-5 ft.)			33 520 (72,780)	32 190 (68,930)	25 150 (54,430)	19 490 (41,870)	19 300 (41,640)	13 560 (29,160)					
-3.0 m (-10 ft.)	34 290 (77,980)	34 290 (77,980)	29 560 (63,980)	29 560 (63,980)	22 510 (48,500)	19 710 (42,350)	16 670 (35,280)	13 790 (29,730)					
-4.5 m (-15 ft.)			22 630 (48,280)	22 630 (48,280)	16 490 (34,300)	16 490 (34,300)							
With 2.5-m³ (3.3 cu. yd.) bucket, 4.2-m (13 ft. 9 in.) arm, 7.8-m (25 ft. 7 in.) boom, and 750-mm (30 in.) double-bar grouser shoes													
7.5 m (25 ft.)									10 880 (23,790)	10 880 (23,790)	6780	6780	
6.0 m (20 ft.)									11 700 (25,460)	11 700 (25,460)	10 070 (20,250)	9040 (19,290)	
4.5 m (15 ft.)			(54,750)	(54,750)	18 420 (39,600)	18 420 (39,600)	14 850 (32,080)	14 850 (32,080)	12 770 (27,710)	11 690 (25,120)	11 490 (25,020)	8810 (18,860)	
3.0 m (10 ft.)					21 780 (46,870)	21 500 (46,340)	16 790 (36,260)	15,090 (32,500)	13 940 (30,190)	11 170 (24,010)	12 150 (26,400)	8510 (18,240)	
1.5 m (5 ft.)					24 280 (52,390)	20 280 (43,670)	18 420 (39,820)	14 340 (30,870)	14 970 (32,420)	10 700 (23,000)	12 120 (26,020)	8230 (17,640)	
Ground Line					14 150 (32,800)	14 150 (32,800)	25 550 (55,260)	19 560 (42,070)	19 470 (42,130)	13 810 (29,700)	15 270 (32,810)	10 340 (22,220)	8000 (17,170)
-1.5 m (-5 ft.)	10 800 (24,430)	10 800 (24,430)	19 890 (45,600)	19 890 (45,600)	25 670 (55,570)	19 240 (41,340)	19 800 (42,840)	13 510 (29,040)	15 030 (32,310)	10 120 (21,760)	11 760 (25,280)	7890 (16,950)	
-3.0 m (-10 ft.)	17 780 (40,170)	17 780 (40,170)	27 900 (63,880)	27 900 (63,880)	24 710 (53,470)	19 210 (41,270)	19 270 (41,640)	13 420 (28,870)	14 980 (32,210)	10 070 (21,670)			
-4.5 m (-15 ft.)	26 090 (59,140)	26 090 (59,140)	29 340 (63,390)	29 340 (63,390)	22 540 (48,600)	19 430 (41,770)	17 630 (37,850)	13 570 (29,200)	13 570 (28,680)	10 250 (22,110)			
-6.0 m (-20 ft.)			23 970 (51,240)	23 970 (51,240)	18 550 (39,460)	18 550 (39,460)	13 910 (28,970)	13 910 (28,970)					

ZX670LC-6

ZAXIS | DASH-6 PRODUCTION-CLASS EXCAVATORS


Lift Charts		ZX670LC-6											
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).													
Load Point Height	3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		
Horizontal Distance from Centerline of Rotation													
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	
With 2.9-m ³ (3.8 cu. yd.) bucket, 3.6-m (11 ft. 10 in.) arm, 7.8-m (25 ft. 7 in.) boom, and 900-mm (36 in.) double-bar grouser shoes													
7.5 m (25 ft.)									11 740 (25,700)	11 740 (25,700)			
6.0 m (20 ft.)							13 980 (30,280)	13 980 (30,280)	12 460 (27,120)	12 100 (25,960)	8120	8120	
4.5 m (15 ft.)					19 900 (42,760)	19 900 (42,760)	15 770 (34,070)	15 770 (34,070)	13 440 (29,160)	11 650 (25,020)	12 040 (23,250)	8770 (18,740)	
3.0 m (10 ft.)					23 020 (49,550)	21 290 (45,900)	17 560 (37,930)	15 030 (32,380)	14 490 (31,390)	11 170 (24,010)	12 480 (26,790)	8530 (18,270)	
1.5 m (5 ft.)					25 060 (54,100)	20 270 (43,630)	18 970 (41,010)	14 370 (30,930)	15 370 (33,280)	10 750 (23,110)	12 230 (26,260)	8290 (17,770)	
Ground Line			12 940 (30,250)	12 940 (30,250)	25 790 (55,810)	19 740 (42,440)	19 740 (42,700)	13 930 (29,960)	15 440 (33,200)	10 450 (22,470)	12 050 (25,900)	8120 (17,440)	
-1.5 m (-5 ft.)			21 020 (48,230)	21 020 (48,230)	25 390 (55,010)	19 560 (42,040)	19 730 (42,680)	13 720 (29,510)	15 280 (32,860)	10 300 (22,150)			
-3.0 m (-10 ft.)	20 320 (45,940)	20 320 (45,940)	31 010 (67,290)	31 010 (67,290)	23 940 (51,810)	19 650 (42,220)	18 790 (40,560)	13 730 (29,530)	14 830 (31,800)	10 340 (22,260)			
-4.5 m (-15 ft.)	30 660 (69,670)	30 660 (69,670)	27 020 (58,350)	27 020 (58,350)	21 160 (45,550)	19 980 (42,960)	16 490 (35,230)	13 980 (30,120)					
-6.0 m (-20 ft.)			20 650 (43,850)	20 650 (43,850)	16 030 (33,650)	16 030 (33,650)							
With 2.5-m ³ (3.3 cu. yd.) bucket, 4.2-m (13 ft. 9 in.) arm, 7.8-m (25 ft. 7 in.) boom, and 900-mm (36 in.) double-bar grouser shoes													
7.5 m (25 ft.)									10 880 (23,790)	10 880 (23,790)	6780	6780	
6.0 m (20 ft.)									11 700 (25,460)	11 700 (25,460)	10 070 (20,250)	9190 (19,630)	
4.5 m (15 ft.)					18 420 (54,750)	18 420 (54,750)	14 850 (39,600)	14 850 (39,600)	12 770 (27,710)	11 880 (25,530)	11 490 (25,020)	8970 (19,200)	
3.0 m (10 ft.)					21 780 (46,870)	21 780 (46,870)	16 790 (36,260)	15 330 (33,010)	13 940 (30,190)	11 360 (24,420)	12 150 (26,400)	8670 (18,580)	
1.5 m (5 ft.)					24 280 (52,390)	20 600 (44,360)	18 420 (39,820)	14 580 (31,380)	14 970 (32,420)	10 890 (23,410)	12 330 (26,480)	8380 (17,980)	
Ground Line			14 150 (32,800)	14 150 (32,800)	25 550 (55,260)	19 880 (42,760)	19 470 (42,130)	14 040 (30,210)	15 530 (33,370)	10 530 (22,630)	12 090 (25,980)	8160 (17,510)	
-1.5 m (-5 ft.)	10 800 (24,430)	10 800 (24,430)	19 890 (45,600)	19 890 (45,600)	25 670 (55,570)	19 560 (42,030)	19 800 (42,840)	13 740 (29,550)	15 290 (32,870)	10 310 (22,160)	11 970 (25,740)	8040 (17,290)	
-3.0 m (-10 ft.)	17 780 (40,170)	17 780 (40,170)	27 900 (63,880)	27 900 (63,880)	24 710 (53,470)	19 530 (41,960)	19 270 (41,640)	13 660 (29,380)	15 240 (32,780)	10 260 (22,070)			
-4.5 m (-15 ft.)	26 090 (59,140)	26 090 (59,140)	29 340 (63,390)	29 340 (63,390)	22 540 (48,600)	19 750 (42,460)	17 630 (37,850)	13 800 (29,720)	13 570 (28,680)	10 430 (22,520)			
-6.0 m (-20 ft.)			23 970 (51,240)	23 970 (51,240)	18 550 (39,460)	18 550 (39,460)	13 910 (28,970)	13 910 (28,970)					

ZX670LC-6

Lift Charts		ZX670LC-6															
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).																	
Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		12 m (40 ft.)		
Horizontal Distance from Centerline of Rotation																	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	
With 2-m³ (2.6 cu. yd.) bucket, 5.3-m (17 ft. 5 in.) arm, 7.8-m (25 ft. 7 in.) boom, and 900-mm (36 in.) double-bar grouser shoes																	
9.0 m (30 ft.)														6010 (11,570)	6010 (11,570)		
7.5 m (25 ft.)														7630 (16,040)	7630 (16,040)		
6.0 m (20 ft.)											9950 (21,590)	9950 (21,590)	8900 (18,980)	8900 (18,980)	5560 (9,950)	5560 (9,950)	
4.5 m (15 ft.)									13 440 (29,090)	13 440 (29,090)	11 860 (25,770)	11 860 (25,770)	10 430 (22,250)	9650 (20,710)	7140 (14,010)	7140 (14,010)	
3.0 m (10 ft.)					27 860 (59,720)	27 860 (59,720)	19 700 (42,440)	19 700 (42,440)	15 610 (33,760)	15 610 (33,760)	13 210 (28,850)	12 110 (26,050)	11 670 (25,370)	9300 (19,950)	8290 (16,550)	7260 (15,030)	
1.5 m (5 ft.)					17 980 (42,690)	17 980 (42,690)	22 900 (49,430)	21 780 (46,910)	17 610 (38,090)	15 430 (33,210)	14 490 (31,410)	11 560 (24,860)	12 480 (27,090)	8940 (19,200)	9040 (17,870)	7050 (15,090)	
Ground Line					16 170 (37,320)	16 170 (37,320)	25 050 (54,170)	20 730 (44,600)	19 130 (41,410)	14 730 (31,690)	15 520 (33,630)	11 100 (23,880)	12 590 (27,050)	8640 (18,560)	8950 (16,950)	6870 (14,730)	
-1.5 m (-5 ft.)	6820 (15,230)	6820 (15,230)	10 050 (22,700)	10 050 (22,700)	18 750 (42,960)	18 750 (42,960)	26 040 (56,370)	20 120 (43,260)	20 000 (43,310)	14 260 (30,670)	15 760 (33,880)	10 770 (23,150)	12 360 (26,570)	8430 (18,100)	6880	6770	
-3.0 m (-10 ft.)	11 070 (24,790)	11 070 (24,790)	14 710 (33,200)	14 710 (33,200)	23 610 (53,970)	23 610 (53,970)	25 940 (56,150)	19 860 (42,690)	20 120 (43,520)	14 020 (30,160)	15 570 (33,480)	10 590 (22,770)	12 250 (26,370)	8330 (17,910)			
-4.5 m (-15 ft.)	15 790 (35,450)	15 790 (35,450)	20 340 (46,010)	20 340 (46,010)	30 830 (70,610)	30 830 (70,610)	24 730 (53,430)	19 880 (42,750)	19 330 (41,700)	13 990 (30,120)	15 440 (33,190)	10 580 (22,790)	10 170	8400			
-6.0 m (-20 ft.)			27 670 (62,900)	27 670 (62,900)	29 090 (62,560)	29 090 (62,560)	22 150 (47,560)	20 170 (43,410)	17 280 (36,920)	14 200 (30,600)	13 250 (27,800)	10 810 (23,360)					
-7.5 m (-25 ft.)					22 770 (48,120)	22 770 (48,120)	17 360 (36,410)	17 360 (36,410)	12 680	12 680							
With 3.5-m³ (4.6 cu. yd.) bucket, 2.9-m (9 ft. 6 in.) BE arm, 6.8-m (22 ft. 4 in.) BE boom, and 900-mm (36 in.) double-bar grouser shoes																	
7.5 m (25 ft.)									14 400 (31,610)	14 400 (31,610)							
6.0 m (20 ft.)							17 530 (37,890)	17 530 (37,890)	15 280 (33,220)	15 280 (33,220)							
4.5 m (15 ft.)							20 470 (44,110)	20 470 (44,110)	16 700 (36,200)	15 580 (33,480)	14 650 (31,940)	11 180 (23,890)					
3.0 m (10 ft.)							23 430 (50,520)	21 470 (46,230)	18 260 (39,520)	14 900 (32,040)	15 370 (33,390)	10 880 (23,340)					
1.5 m (5 ft.)							25 430 (54,940)	20 540 (44,180)	19 480 (42,140)	14 340 (30,830)	15 610 (33,520)	10 590 (22,720)					
Ground Line							26 020 (56,320)	20 050 (43,090)	19 950 (43,140)	13 990 (30,070)	15 420 (33,150)	10 410 (22,380)					
-1.5 m (-5 ft.)					33 520 (72,780)	32 870 (70,400)	25 150 (54,430)	19 930 (42,820)	19 300 (41,640)	13 890 (29,860)							
-3.0 m (-10 ft.)			34 290 (77,980)	34 290 (77,980)	29 560 (63,980)	29 560 (63,980)	22 510 (48,500)	20 150 (43,300)	16 670 (35,280)	14 120 (30,440)							
-4.5 m (-15 ft.)					22 630 (48,280)	22 630 (48,280)	16 490 (34,300)	16 490 (34,300)									

Buckets		ZX670LC-6																		
A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through Hitachi parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.																				
Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force		Arm Dig Force		Arm Dig Force		ME Arm Dig Force		Bucket Tip Radius		Number of Teeth	
	mm	in.	m³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.		
Extreme-Duty Plate Lip	1219	48	2.65	3.5	3396	7,487	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	3	
	1372	54	3.06	4	3546	7,817	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	3	
	1524	60	3.53	4.6	3795	8,368	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	3	
Heavy-Duty High Capacity	914	36	1.80	2.4	2664	5,873	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	3	
	1067	42	2.22	2.9	2867	6,320	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	3	
	1219	48	2.06	2.7	2966	6,540	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	4	
	1372	54	3.09	4	3129	6,898	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	5	
	1524	60	3.54	4.6	3302	7,280	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	5	
	1829	72	4.44	5.8	3593	7,921	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	6	
	2032	80	5.05	6.6	3916	8,634	275	61,851	242	54,423	220	49,448	189	42,497	290	65,260	2281	89.79	6	
	2184	86	4.59	6	3941	8,688	287	64,421	246	55,278	223	50,152	58	13,013	295	66,427	2190	86.23	6	
	Heavy-Duty	914	36	1.30	1.7	2252	4,964	326	73,327	258	57,940	233	52,331	198	44,597	312	70,090	1924	75.75	3
	1067	42	1.58	2.1	2594	5,719	326	73,327	258	57,940	233	52,331	198	44,597	312	70,090	1924	75.75	4	
	1219	48	1.90	2.5	2722	6,000	326	73,327	258	57,940	233	52,331	198	44,597	312	70,090	1924	75.75	4	
	1372	54	2.19	2.9	2858	6,302	326	73,327	258	57,940	233	52,331	198	44,597	312	70,090	1924	75.75	5	
	1524	60	2.52	3.3	3062	6,750	326	73,327	258	57,940	233	52,331	198	44,597	312	70,090	1924	75.75	5	
	Truck Loading	1930	76	3.75	4.9	3043	6,709	287	64,421	246	55,278	223	50,152	58	13,013	295	66,427	2189	86.20	6
		2083	82	4.05	5.3	3292	7,257	287	64,421	246	55,278	223	50,152	58	13,013	295	66,427	2189	86.20	7


Bucket Selection Guide* ZX870LC-6

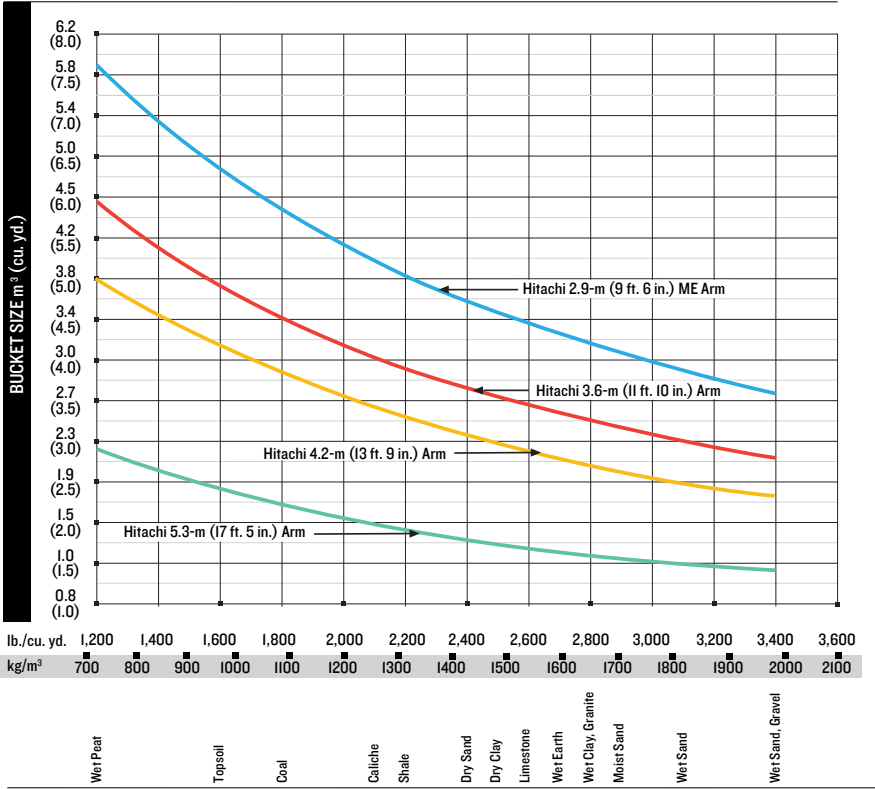


* Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Engine		ZX870LC-6	
Manufacturer and Model		Isuzu 6WGI-FT4	
Non-Road Emission Standards		EPA Final Tier 4/EU Stage IV	
Net Rated Power (ISO 9249)		382 kW (512 hp) @ 1,800 rpm	
Cylinders		6	
Displacement		15.68 L (957 cu. in.)	
Off-Level Capacity		70% (35 deg.)	
Aspiration		Turbocharged, air-to-air charge-air cooler	
Cooling			
2 cool-on-demand hydraulic-driven, suction-type fans with remote-mounted drives			
Powertrain			
2-speed propel			
Maximum Travel Speed			
Low		3.2 km/h (2 mph)	
High		4.7 km/h (2.9 mph)	
Drawbar Pull		57 085 kg (125,850 lb.)	
Hydraulics			
Open center, load sensing			
Main Pumps		2 variable-displacement pumps	
Maximum Rated Flow		566 L/m (150 gpm) x 2	
Pilot Pump		One gear	
Maximum Rated Flow		30 L/m (7.9 gpm)	
Pressure Setting		3900 kPa (566 psi)	
System Operating Pressure			
Circuits			
Implement Circuits		31 900 kPa (4,627 psi)	
Travel Circuits		34 300 kPa (4,975 psi)	
Swing Circuits		29 400 kPa (4,264 psi)	
Power Boost		34 300 kPa (4,975 psi)	
Controls		Pilot levers, short-stroke, low-effort hydraulic pilot controls with shutoff lever	
Cylinders			
Heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins			
	Boom (2)	Bore 215 mm (8.5 in.)	Rod Diameter 150 mm (5.9 in.)
	Arm (1)	225 mm (8.9 in.)	Stroke 1835 mm (72.2 in.)
	Bucket (1)	200 mm (7.9 in.)	160 mm (6.3 in.)
			2225 mm (87.6 in.)
		140 mm (5.5 in.)	1555 mm (61.2 in.)
Electrical			
Number of Batteries (12 volt)		2	
Battery Capacity		500 CCA	
Alternator Rating		50 amp	
Work Lights		5 halogen (1 mounted on frame, 2 mounted on boom, and 2 mounted on top of cab)	
Undercarriage			
Rollers (each side)			
Carrier		3	
Track		9	
Double-Bar Grouser Shoes (each side)		51	
Track			
Adjustment		Hydraulic	
Guides		Front and center	
Chain		Sealed and lubricated	
Planetary Final Drives with Axial Piston Motors			
Ground Pressure			
700-mm (28 in.) Double-Bar Grouser Shoes		106.9 kPa (15.5 psi)	
800-mm (32 in.) Double-Bar Grouser Shoes		94.5 kPa (13.5 psi)	
900-mm (36 in.) Double-Bar Grouser Shoes		84.8 kPa (12 psi)	
Swing Mechanism			
Swing Speed		7.8 rpm	
Swing Torque		269 000 Nm (198,404 lb.-ft.)	


Serviceability		ZX870LC-6					
Refill Capacities							
Fuel Tank		1110 L (293 gal.)					
Diesel Exhaust Fluid (DEF) Tank		95 L (25.1 gal.)					
Cooling System		124 L (32.8 gal.)					
Engine Oil with Filter		57 L (15.1 gal.)					
Hydraulic Tank		500 L (132.1 gal.)					
Hydraulic System		1042 L (275.3 gal.)					
Gearbox							
Swing (each)		15.7 L (16.6 qt.)					
Travel (each)		19 L (20.1 qt.)					
Pump Drive		6.2 L (6.6 qt.)					
Operating Weights							
With full fuel tank; 79-kg (175 lb.) operator; 3.49-m³ (4.57 cu. yd.), 1370-mm (54 in.), 3558-kg (7,845 lb.) bucket; 4.4-m (14 ft. 5 in.) arm; 12 400-kg (27,337 lb.) counterweight; counterweight removal device and 900-mm (36 in.) double-bar grouser shoes							
SAE Operating Weight		85 600 kg (188,716 lb.)					
Components							
Undercarriage w/ Double-Bar Grouser Shoes							
650 mm (26 in.)		32 326 kg (71,267 lb.)					
750 mm (30 in.)		33 026 kg (72,810 lb.)					
900 mm (36 in.)		33 966 kg (74,882 lb.)					
1020 mm (40 in.)		34 396 kg (75,830 lb.)					
One-Piece Boom (with arm cylinder)							
8.4 m (27 ft. 7 in.)		8190 kg (18,056 lb.)					
7.1-m (23 ft. 4 in.) Mass Excavating		7670 kg (16,909 lb.)					
10 m (32 ft. 10 in.)		9390 kg (20,701 lb.)					
Arm with Bucket Cylinder and Linkage							
3.7 m (12 ft. 1 in.)		4290 kg (9,458 lb.)					
4.4 m (14 ft. 5 in.)		4630 kg (10,207 lb.)					
5.4 m (17 ft. 9 in.)		4940 kg (10,891 lb.)					
2.95-m (9 ft. 8 in.) Mass Excavating w/ 7.1-m (23 ft. 4 in.) Mass-Excavating Boom		4620 kg (10,185 lb.)					
Boom-Lift Cylinders (2), Total Weight		1700 kg (3,748 lb.)					
Counterweight with Standard Mainframe		13 300 kg (29,321 lb.)					
Operating Dimensions							
Arm Length		3.7 m (12 ft. 2 in.)	4.4 m (14 ft. 5 in.)	5.4 m (17 ft. 9 in.)	2.95-m (9 ft. 8 in.)	4.4 m (14 ft. 5 in.)	5.4 m (17 ft. 9 in.)
		w/ 8.4-m (27 ft. 7 in.)	w/ 8.4-m (27 ft. 7 in.)	w/ 8.4-m (27 ft. 7 in.)	Mass Excavating w/ 7.1-m (23 ft. 4 in.)	w/ 10-m (32 ft. 10 in.)	w/ 10-m (32 ft. 10 in.)
		Boom	Boom	Boom	Boom	Boom	Boom
Arm Digging Force							
SAE		315 kN (70,815 lb.)	273 kN (61,373 lb.)	237 kN (53,280 lb.)	378 kN (84,978 lb.)	273 kN (61,373 lb.)	237 kN (53,280 lb.)
ISO		323 kN (72,613 lb.)	280 kN (62,946 lb.)	243 kN (54,629 lb.)	394 kN (88,575 lb.)	280 kN (62,946 lb.)	243 kN (54,629 lb.)
Bucket Digging Force							
SAE		359 kN (80,706 lb.)	359 kN (80,706 lb.)	289 kN (64,970 lb.)	411 kN (92,396 lb.)	359 kN (80,706 lb.)	289 kN (64,970 lb.)
ISO		399 kN (89,699 lb.)	399 kN (89,699 lb.)	323 kN (72,613 lb.)	472 kN (106,110 lb.)	399 kN (89,699 lb.)	323 kN (72,613 lb.)
A	Maximum Reach	14.10 m (46 ft. 3 in.)	14.91 m (48 ft. 11 in.)	15.91 m (52 ft. 2 in.)	12.34 m (40 ft. 6 in.)	16.55 m (54 ft. 4 in.)	17.56 m (57 ft. 7 in.)
A'	Maximum Reach at Ground Level	13.82 m (45 ft. 4 in.)	14.64 m (48 ft.)	15.67 m (51 ft. 5 in.)	12.02 m (39 ft. 5 in.)	16.32 m (53 ft. 7 in.)	17.34 m (56 ft. 11 in.)
B	Maximum Digging Depth	8.87 m (29 ft. 1 in.)	9.57 m (31 ft. 5 in.)	10.57 m (34 ft. 8 in.)	7.14 m (23 ft. 5 in.)	11.16 m (36 ft. 7 in.)	12.16 m (39 ft. 11 in.)
B'	Maximum Digging Depth at 2.44-m (8 ft.) Flat Bottom	8.74 m (28 ft. 8 in.)	9.46 m (31 ft.)	10.47 m (34 ft. 4 in.)	7 m (23 ft.)	11.04 m (36 ft. 3 in.)	12.06 m (39 ft. 7 in.)
C	Maximum Cutting Height	13.03 m (42 ft. 9 in.)	13.82 m (45 ft. 4 in.)	14.52 m (47 ft. 8 in.)	12.01 m (39 ft. 5 in.)	14.66 m (48 ft. 1 in.)	15.34 m (50 ft. 4 in.)
D	Maximum Dumping Height	9.08 m (29 ft. 9 in.)	9.74 m (31 ft. 11 in.)	10.41 m (34 ft. 2 in.)	8.13 m (26 ft. 8 in.)	10.81 m (35 ft. 6 in.)	11.26 m (36 ft. 11 in.)
E	Minimum Swing Radius	5.95 m (19 ft. 6 in.)	5.95 m (19 ft. 6 in.)	5.94 m (19 ft. 6 in.)	5.21 m (17 ft. 1 in.)	7.35 m (24 ft. 1 in.)	7.32 m (24 ft.)
F	Maximum Vertical Wall	7.17 m (23 ft. 6 in.)	8.48 m (27 ft. 10 in.)	9.75 m (32 ft.)	4.10 m (13 ft. 5 in.)	9.87 m (32 ft. 5 in.)	11.34 m (37 ft. 2 in.)
G	Tail Swing Radius	4.60 m (15 ft. 1 in.)	4.60 m (15 ft. 1 in.)	4.60 m (15 ft. 1 in.)	4.60 m (15 ft. 1 in.)	4.60 m (15 ft. 1 in.)	4.60 m (15 ft. 1 in.)

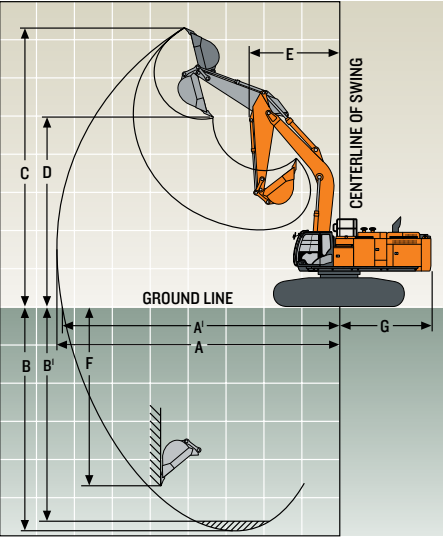

Machine Dimensions		ZX870LC-6
A	Overall Length w/ Arm	
	3.7 m (12 ft. 2 in.)	14.88 m (48 ft. 7 in.)
	4.4 m (14 ft. 5 in.)	14.80 m (48 ft. 7 in.)
	5.4 m (17 ft. 9 in.)	14.65 m (48 ft. 1 in.)
	2.95-m (9 ft. 8 in.) Mass Excavating with Mass-Excavating Boom	13.55 m (44 ft. 5 in.)
B	Overall Height w/ Arm	
	3.7 m (12 ft. 2 in.)	4.77 m (15 ft. 8 in.)
	4.4 m (14 ft. 5 in.)	5.13 m (16 ft. 10 in.)
	5.4 m (17 ft. 9 in.)	5.76 m (18 ft. 11 in.)
	2.95-m (9 ft. 8 in.) Mass Excavating with Mass-Excavating Boom	5.20 m (17 ft. 1 in.)
C	Rear-End Length/Swing Radius	4.54 m (14 ft. 11 in.)
D	Distance Between Idler/Sprocket Centerline	5.11 m (16 ft. 9 in.)
E	Undercarriage Length	6.36 m (20 ft. 10 in.)
F	Counterweight Clearance	1.68 m (5 ft. 6 in.)
G	Upperstructure Width	4.12 m (13 ft. 6 in.)
H	Cab Height	3.69 m (12 ft. 1 in.)
I	Track Width w/ Double-Bar Grouser Shoes	650 mm (26 in.) / 750 mm (30 in.) / 900 mm (36 in.)
J	Gauge Width w/900-mm (36 in.) Double-Bar Grouser Shoes	
	Operating Position	3.45 m (11 ft. 4 in.)
	Transport Position	2.83 m (9 ft. 3 in.)
K	Ground Clearance	0.89 m (35 in.)
L	Overall Width w/ 900-mm (36 in.) Double-Bar Grouser Shoes	
	Operating Position	4.35 m (14 ft. 3 in.)
	Transport Position	3.73 m (12 ft. 3 in.)

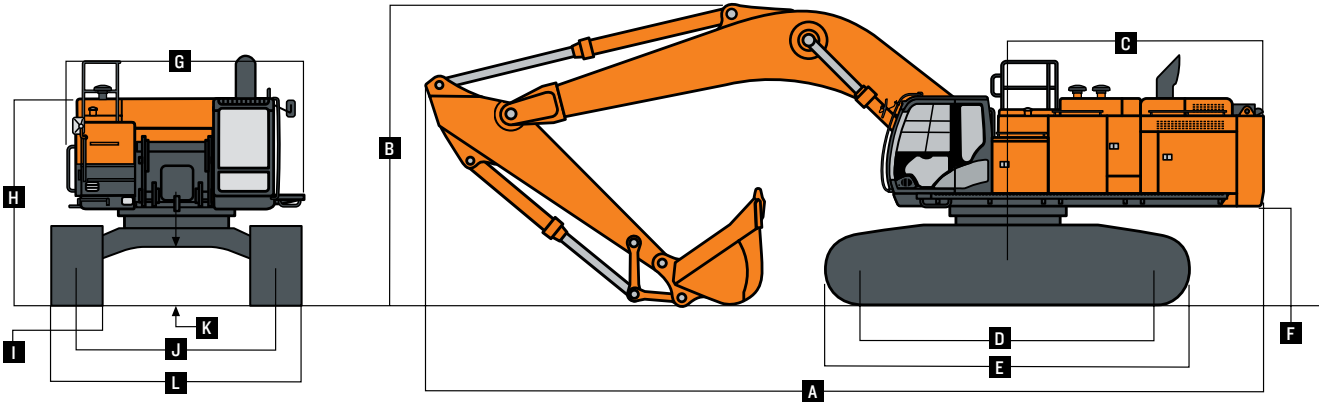

Packing Dimensions and Weights for Transportation		ZX870LC-6		
Base Machine (without front attachment and side frame)*	Length 6.5 m (21 ft. 4 in.)	Height 2.96 m (9 ft. 9 in.)	Overall Width 3.42 m (11 ft. 3 in.)	Weight 29 000 kg (63,934 lb.)
Side Frame**				
650-mm (26 in.) Shoe Width	6.36 m (20 ft. 10 in.)	1.50 m (4 ft. 11 in.)	1.33 m (4 ft. 4 in.)	12 300 kg (27,117 lb.)
750-mm (30 in.) Shoe Width	6.36 m (20 ft. 10 in.)	1.50 m (4 ft. 11 in.)	1.33 m (4 ft. 4 in.)	12 600 kg (27,778 lb.)
900-mm (36 in.) Shoe Width	6.36 m (20 ft. 10 in.)	1.50 m (4 ft. 11 in.)	1.42 m (4 ft. 8 in.)	13 100 kg (28,881 lb.)
1020-mm (40 in.) Shoe Width	6.36 m (20 ft. 10 in.)	1.50 m (4 ft. 11 in.)	1.45 m (4 ft. 9 in.)	13 500 kg (29,762 lb.)
Counterweight, Standard	3.36 m (11 ft.)	1.62 m (5 ft. 4 in.)	0.72 m (28 in.)	13 300 kg (29,321 lb.)
Boom				
7.1 m (23 ft. 4 in.)	7.49 m (24 ft. 7 in.)	2.70 m (8 ft. 10 in.)	1.45 m (4 ft. 9 in.)	7670 kg (16,909 lb.)
8.4 m (27 ft. 7 in.)	8.78 m (28 ft. 10 in.)	2.50 m (8 ft. 2 in.)	1.45 m (4 ft. 9 in.)	8190 kg (18,056 lb.)
10 m (32 ft. 10 in.)	10.37 m (34 ft.)	2.70 m (8 ft. 10 in.)	1.45 m (4 ft. 9 in.)	9390 kg (20,701 lb.)
Arm				
2.95 m (9 ft. 8 in.)	4.46 m (14 ft. 8 in.)	1.66 m (5 ft. 5 in.)	0.85 m (33 in.)	4620 kg (10,185 lb.)
3.7 m (12 ft. 2 in.)	5.29 m (17 ft. 4 in.)	1.42 m (4 ft. 8 in.)	0.82 m (32 in.)	4290 kg (9,458 lb.)
4.4 m (14 ft. 5 in.)	5.88 m (19 ft. 3 in.)	1.42 m (4 ft. 8 in.)	0.82 m (32 in.)	4630 kg (10,207 lb.)
5.4 m (17 ft. 9 in.)	6.83 m (22 ft. 5 in.)	1.48 m (4 ft. 10 in.)	0.80 m (31 in.)	4940 kg (10,891 lb.)
Length Less Boom, Arm and Counterweight	7.53 m (24 ft. 8 in.)	3.89 m (12 ft. 9 in.) / 3.86 m (12 ft. 8 in.) without exhaust stack	3.48 m (11 ft. 5 in.) w/ 650-mm (26 in.) shoes / 3.58 m (11 ft. 9 in.) w/ 750-mm (30 in.) shoes / 3.73 m (12 ft. 3 in.) w/ 900-mm (36 in.) shoes	53 400 kg (117,727 lb.) w/ 650-mm (26 in.) shoes / 54 000 kg (119,050 lb.) w/ 750-mm (30 in.) shoes / 55 000 kg (121,254 lb.) w/ 900-mm (36 in.) shoes
*Steps on the track frame, exhaust stack, side hydraulic oil tank, handrails and upper fuel tank must be removed to comply with the width dimensions above.				
**The dimensions and the weights indicate those of one side frame.				

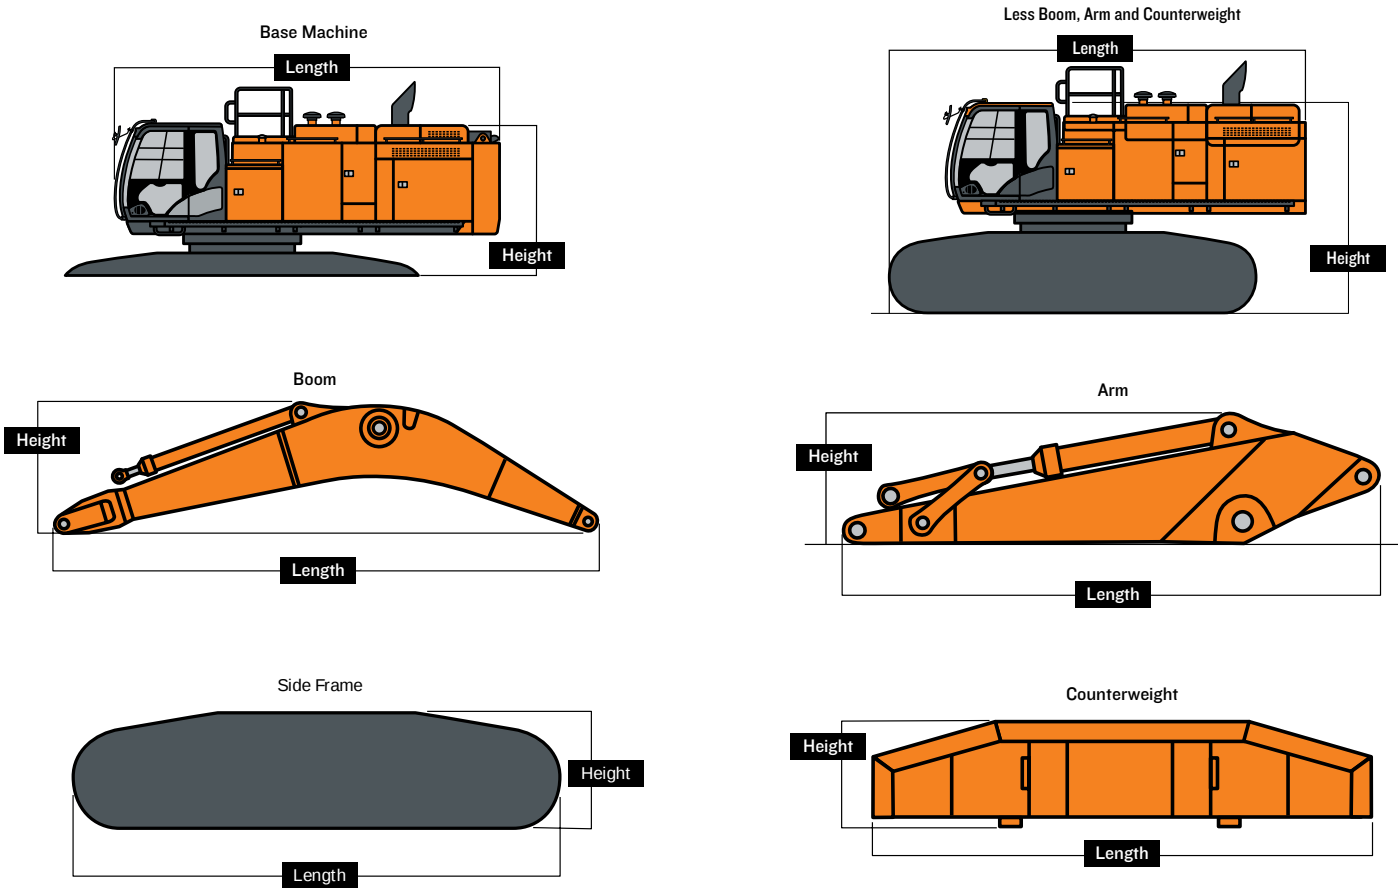

ZX870LC-6

ZAXIS | DASH-6 PRODUCTION-CLASS EXCAVATORS

Lift Charts		ZX870LC-6													
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).															
Load Point Height	3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		12.0 m (40 ft.)		
Horizontal Distance from Centerline of Rotation															
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	
With 2.9-m ³ (3.79 cu. yd.) bucket, 4.4-m (14 ft. 5 in.) arm, 8.4-m (27 ft. 7 in.) boom, and 650-mm (26 in.) double-bar grouser shoes															
9.0 m (30 ft.)										(27,690)	(27,690)	10 020 (19,450)	10 020 (19,450)		
7.5 m (25 ft.)										13 530 (29,450)	13 530 (29,450)	12 670 (26,640)	12 670 (26,640)		
6.0 m (20 ft.)							16 970 (36,620)	16 970 (36,620)	14 840 (32,180)	14 840 (32,180)	13 490 (29,370)	12 540 (26,860)	9300 (16,450)	9300 (16,450)	
4.5 m (15 ft.)					25 250 (54,120)	25 250 (54,120)	19 610 (42,250)	19 610 (42,250)	16 420 (35,520)	15 860 (34,120)	14 420 (31,320)	12 110 (25,980)	12 000 (23,410)	9350 (19,960)	
3.0 m (10 ft.)					29 590 (63,590)	28 620 (61,710)	22 180 (47,810)	20 250 (43,630)	18 010 (38,940)	15 130 (32,540)	15 400 (33,400)	11 650 (25,010)	13 670 (27,730)	9120 (19,490)	
1.5 m (5 ft.)					28 890 (69,870)	27 170 (58,490)	24 200 (52,240)	19 280 (41,520)	19 360 (41,870)	14 490 (31,160)	16 260 (35,220)	11 240 (24,120)	14 110 (29,650)	8870 (19,010)	
Ground Line					28 790 (68,030)	26 420 (56,810)	25 380 (54,870)	18 640 (40,100)	20 260 (43,820)	14 020 (30,140)	16 820 (36,390)	10 920 (23,450)	13 980 (26,770)	8700 (18,650)	
-1.5 m (-5 ft.)			16 350 (37,550)	16 350 (37,550)	33 260 (72,030)	26 150 (56,180)	25 660 (55,510)	18 300 (39,350)	20 540 (44,410)	13 740 (29,540)	16 910 (36,500)	10 730 (23,060)			
-3.0 m (-10 ft.)	16 530 (37,410)	16 530 (37,410)	24 950 (57,060)	24 950 (57,060)	31 890 (69,030)	26 190 (56,250)	24 980 (54,000)	18 220 (39,180)	20,050 (43,250)	13 660 (29,380)	16 230 (34,820)	10 720 (23,060)			
-4.5 m (-15 ft.)	25 420 (57,580)	25 420 (57,580)	36 210 (81,680)	36 210 (81,680)	29 280 (63,220)	26 490 (56,920)	23 170 (49,890)	18 390 (39,570)	18,450 (39,500)	13 800 (29,730)					
-6.0 m (-20 ft.)			31 730 (68,100)	31 730 (68,100)	24 960 (53,450)	24 960 (53,450)	19 640 (41,730)	18 850 (40,640)	14 570 (31,910)	14 310 (31,100)					
With 4.5-m ³ (5.89 cu. yd.) bucket, 2.95-m (9 ft. 8 in.) BE arm, 7.1-m (23 ft. 4 in.) BE boom, and 650-mm (26 in.) double-bar grouser shoes															
7.5 m (25 ft.)							18 590 (40,540)	18 590 (40,540)							
6.0 m (20 ft.)					24 030 (51,760)	24 030 (51,760)	20 180 (43,740)	20 180 (43,740)	17 960 (39,200)	15 640 (33,380)					
4.5 m (15 ft.)					28 170 (60,570)	28 170 (60,570)	22 240 (48,080)	21 160 (45,510)	18 940 (41,120)	15 290 (32,740)					
3.0 m (10 ft.)					31 890 (68,680)	29 020 (62,470)	24 270 (52,450)	20 180 (43,400)	19 970 (43,290)	14 780 (31,720)					
1.5 m (5 ft.)					33 940 (73,300)	27 780 (59,730)	25 680 (55,500)	19 380 (41,660)	20 660 (44,710)	14 310 (30,710)					
Ground Line					34 060 (73,720)	27 140 (58,300)	26,030 (56,270)	18 870 (40,540)	20 610 (44,450)	13 990 (30,040)					
-1.5 m (-5 ft.)			37 400 (86,600)	37 400 (86,600)	32 420 (70,180)	26 950 (57,870)	24 990 (53,930)	18 660 (40,100)	19 060 (40,100)	13 920 (30,040)					
-3.0 m (-10 ft.)	37 120 (84,430)	37 120 (84,430)	37 090 (80,340)	37 090 (80,340)	28 750 (61,990)	27 130 (58,270)	21 820 (46,550)	18 800 (40,460)							
-4.5 m (-15 ft.)			28 290 (60,460)	28 290 (60,460)	21 550 (45,370)	21 550 (45,370)									
With 2.9-m ³ (3.79 cu. yd.) bucket, 4.4-m (14 ft. 4 in.) arm, 8.4-m (27 ft. 7 in.) boom, and 750-mm (30 in.) double-bar grouser shoes															
9.0 m (30 ft.)												10 020 (19,450)	10 020 (19,450)		
7.5 m (25 ft.)										13 530 (29,450)	13 530 (29,450)	12 670 (26,640)	12 670 (26,640)		
6.0 m (20 ft.)							16 970 (36,620)	16 970 (36,620)	14 840 (32,180)	14 840 (32,180)	13 490 (29,370)	12 650 (27,100)	9300 (16,450)	9300 (16,450)	
4.5 m (15 ft.)					25 250 (54,120)	25 250 (54,120)	19 610 (42,250)	19 610 (42,250)	16 420 (35,520)	16 000 (34,410)	14 420 (31,320)	12 220 (24,220)	12 000 (23,410)	9450 (20,160)	
3.0 m (10 ft.)					29 590 (63,590)	28 850 (62,210)	22 180 (47,810)	20 420 (44,000)	18 010 (38,940)	15 260 (32,830)	15 400 (33,400)	11 760 (25,250)	13 670 (27,730)	9210 (19,700)	
1.5 m (5 ft.)					28 890 (69,870)	27 400 (58,990)	24 200 (52,240)	19 450 (41,880)	19 360 (41,870)	14 620 (31,450)	16 260 (35,220)	11 350 (24,360)	14 110 (29,650)	8970 (19,210)	
Ground Line					28 790 (68,030)	26 660 (57,310)	25 380 (54,870)	18 810 (40,460)	20 260 (43,820)	14 150 (30,430)	16 820 (36,390)	11 030 (23,690)	14 120 (26,770)	8790 (18,860)	
-1.5 m (-5 ft.)			16 350 (37,550)	16 350 (37,550)	33 260 (72,030)	26 380 (56,680)	25 660 (55,510)	18 470 (39,720)	20 540 (44,410)	13 870 (29,830)	16 910 (36,500)	10 850 (23,300)			
-3.0 m (-10 ft.)	16 530 (37,410)	16 530 (37,410)	24 950 (57,060)	24 950 (57,060)	31 890 (69,030)	26 420 (56,750)	24 980 (54,000)	18 390 (39,550)	20 050 (43,250)	13 790 (29,670)	16 230 (34,820)	10 830 (23,300)			
-4.5 m (-15 ft.)	25 420 (57,580)	25 420 (57,580)	36 210 (81,680)	36 210 (81,680)	29 280 (63,220)	26 720 (57,420)	23 170 (49,890)	18 560 (39,940)	18,450 (39,500)	13 940 (30,020)					
-6.0 m (-20 ft.)			31 730 (68,100)	31 730 (68,100)	24 960 (53,450)	24 690 (53,450)	19 640 (41,730)	19 020 (41,000)	14 570 (31,910)	14 440 (31,100)					

ZX870LC-6

ZAXIS | DASH-6 PRODUCTION-CLASS EXCAVATORS

Lift Charts		ZX870LC-6																																									
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).																																											
Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		12.0 m (40 ft.)		13.5 m (45 ft.)																										
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side																									
With 2.3-m ³ (3.01 cu. yd.) bucket, 5.4-m (17 ft. 9 in.) arm, 8.4-m (27 ft. 7 in.) boom, and 900-mm (36 in.) double-bar grouser shoes																																											
10.5 m (35 ft.)												7900 (15,910)		7900 (15,910)		5930		5930																									
9.0 m (30 ft.)												9200 (19,730)		9200 (19,730)		5930		5930																									
7.5 m (25 ft.)												10 200 (22,080)		10 200 (22,080)		8360 (16,960)		8360 (16,960)																									
6.0 m (20 ft.)												12 310 (26,700)		12 310 (26,700)		11 660 (25,210)		11 660 (25,210)		9880 (20,710)		9880 (20,710)																					
4.5 m (15 ft.)												21 680 (46,510)		21 680 (46,510)		17 380 (37,480)		17 380 (37,480)		14 830 (32,110)		14 830 (32,110)		13 180 (28,630)		12 680 (27,200)		11 460 (24,150)		9840 (21,030)		5780 (11,420)		5780 (11,420)									
3.0 m (10 ft.)												26 460 (56,880)		26 460 (56,880)		20 200 (43,570)		20 200 (43,570)		16 610 (35,920)		15 800 (33,990)		14 320 (31,050)		12 140 (26,060)		12 780 (27,780)		9500 (20,340)		6950 (11,420)		6950 (11,420)									
1.5 m (5 ft.)												30 210 (65,120)		28 350 (61,050)		22 650 (48,900)		20 060 (43,200)		18 220 (39,410)		15 040 (32,340)		15 390 (33,330)		11 640 (24,980)		13 440 (29,150)		9180 (19,650)		7070		7070									
Ground Line												10 910 (25,350)		10 910 (25,350)		31 520 (70,030)		27 140 (58,370)		24 390 (52,710)		19 190 (41,280)		19 470 (42,110)		14 420 (31,010)		16 220 (35,120)		11 220 (24,090)		13 920 (30,140)		8910 (19,090)									
-1.5 m (-5 ft.)												7900 (17,940)		7900 (17,940)		15 260 (35,000)		15 260 (35,000)		33 060 (71,780)		26 520 (56,980)		25 270 (54,670)		18 640 (40,070)		20 180 (43,650)		14 010 (30,100)		16 680 (36,070)		10 930 (23,460)		14 070 (30,330)		8730 (18,730)					
-3.0 m (-10 ft.)												10 450 (23,480)		10 450 (23,480)		13 570 (30,700)		13 570 (30,700)		21 250 (48,560)		21 250 (48,560)		32 710 (70,770)		26 310 (56,520)		25 270 (54,630)		18 380 (39,520)		20 230 (43,710)		13 790 (29,650)		16 590 (35,780)		10 780 (23,170)		13 360 (23,920)		8690 (18,700)	
-4.5 m (-15 ft.)												16 070 (36,160)		16 070 (36,160)		20 110 (45,550)		20 110 (45,550)		29 200 (66,830)		29 200 (66,830)		31 050 (66,830)		26 420 (56,770)		24 260 (52,360)		18 390 (39,550)		19 430 (41,840)		13 780 (29,650)		15 660 (33,480)		10 820 (23,310)					
-6.0 m (-20 ft.)												28 310 (64,350)		28 310 (64,350)		36 610 (78,800)		36 610 (78,800)		27 970 (60,140)		26 830 (57,700)		21 990 (47,140)		18 650 (40,170)		17 360 (36,940)		14 020 (30,230)													
-7.5 m (-25 ft.)												29 490 (62,630)		29 490 (62,630)		22 810 (48,310)		22 810 (48,310)		17 610 (36,860)		17 610 (36,860)																					
With 4.5-m ³ (5.89 cu. yd.) bucket, 2.95-m (9 ft. 8 in.) BE arm, 7.1-m (23 ft. 4 in.) BE boom, and 900-mm (36 in.) double-bar grouser shoes																																											
7.5 m (25 ft.)												18 590 (40,540)		18 590 (40,540)																													
6.0 m (20 ft.)												24 030 (51,760)		24 030 (51,760)		20 180 (43,740)		20 180 (43,740)		17 960 (39,200)		15 960 (34,080)																					
4.5 m (15 ft.)												28 170 (60,570)		28 170 (60,570)		22 240 (48,080)		21 570 (46,390)		18 940 (41,120)		15 620 (33,440)																					
3.0 m (10 ft.)												31 890 (68,680)		29 570 (63,670)		24 270 (52,450)		20 590 (44,280)		19 970 (43,290)		15 100 (32,410)																					
1.5 m (5 ft.)												33 940 (73,300)		28 330 (60,930)		25 680 (55,500)		19 790 (42,540)		20 660 (44,710)		14 630 (31,400)																					
Ground Line												34 060 (73,720)		27 700 (59,500)		26 030 (56,270)		19 270 (41,420)		20 610 (44,450)		14 310 (30,730)																					
-1.5 m (-5 ft.)												37 400 (86,600)		37 400 (86,600)		32 420 (70,180)		27 510 (59,060)		24 990 (53,930)		19 070 (40,980)																					
-3.0 m (-10 ft.)												37 120 (84,430)		37 120 (84,430)		37 090 (80,340)		37 090 (80,340)		28 750 (61,990)		27 690 (59,470)		21 820 (46,550)		19 210 (41,340)																	
-4.5 m (-15 ft.)												28 290 (60,460)		28 290 (60,460)		21 550 (45,370)		21 550 (45,370)																									

Lift Charts			ZX870LC-6																																										
Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).																																													
Load Point Height	3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		12.0 m (40 ft.)		13.5 m (45 ft.)		15 m (50 ft.)																												
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side																											
With 2-m³ (2.63 cu. yd.) bucket, 4.4-m (14 ft. 5 in.) arm, 10-m (32 ft. 10 in.) boom, and 900-mm (36 in.) double-bar grouser shoes														7660		7660																													
10.5 m (35 ft.)																																													
														(21,430)		(21,430)																													
9.0 m (30 ft.)														10 150		10 150		9760		9760																									
														(22,130)		(22,130)		(21,450)		(21,450)																									
7.5 m (25 ft.)														10 900		10 900		10 130		10 050		7460		7460																					
														(23,660)		(23,660)		(22,110)		(21,480)																									
6.0 m (20 ft.)														16 520		16 520		13 630		13 630		11 860		10 720		9730		10 030		7570															
														(35,420)		(35,420)		(29,380)		(29,380)		(25,670)		(25,670)		(23,320)		(20,840)		(20,810)		(16,080)													
4.5 m (15 ft.)														19 240		19 240		15 300		15 230		12 930		11 830		11 410		9330		10 420		7370													
														(41,260)		(41,260)		(32,950)		(32,850)		(27,960)		(25,450)		(24,750)		(20,000)		(22,710)		(15,710)													
3.0 m (10 ft.)														21 600		18 730		16 860		14 330		13 990		11 230		12 110		8930		10 850		7140													
														(46,410)		(40,460)		(36,330)		(30,900)		(30,220)		(24,160)		(26,240)		(19,160)		(23,590)		(15,260)													
1.5 m (5 ft.)														23 190		17 810		18 100		13 630		14 890		10 730		12 730		8580		11 230		6920													
														(49,970)		(38,410)		(39,060)		(29,360)		(32,180)		(23,070)		(27,570)		(18,410)		(24,350)		(14,800)													
Ground Line														23 960		17 320		18 920		13 150		15 550		10 350		13 190		8310		11 300		6760													
														(51,760)		(37,280)		(40,870)		(28,310)		(33,600)		(22,260)		(28,550)		(17,840)		(24,280)		(14,480)													
-1.5 m (-5 ft.)																		13 350		13 350		24 070		17 110		19 270		12 890		15 880		10 120		13 400		8150		11 230		6690					
																		(31,420)		(31,420)		(52,080)		(36,810)		(41,660)		(27,730)		(34,320)		(21,760)		(28,960)		(17,500)									
-3.0 m (-10 ft.)																11 970		11 970		20 970		20 970		23 610		17 120		19 130		12 810		15 810		10 040		13 240		8110							
																(27,640)		(27,640)		(48,640)		(48,640)		(51,100)		(36,800)		(41,350)		(27,550)		(34,130)		(21,590)		(28,510)		(17,430)							
-4.5 m (-15 ft.)														15 260		15 260		20 150		20 150		27 960		25 110		22 560		17 290		18 430		12 900		15 210		10 120		12 440		8240					
														(34,670)		(34,670)		(46,110)		(46,110)		(60,590)		(53,910)		(48,790)		(37,180)		(39,780)		(27,760)		(32,730)		(21,780)		(26,420)		(17,800)					
-6.0 m (-20 ft.)														23 300		23 300		29 880		29 880		25 530		25 530		20 770		17 650		16 990		13 180		13 760		10 400									
														(52,950)		(52,950)		(68,530)		(68,530)		(55,120)		(55,060)		(44,760)		(37,990)		(36,480)		(28,400)		(29,210)		(22,460)									
-7.5 m (-25 ft.)																		26 930		26 930		21 900		21 900		17 840		17 840		14 240		13 730													
																		(57,740)		(57,740)		(46,870)		(46,870)		(38,010)		(38,010)		(29,900)		(29,900)		(23,720)											
With 1.9-m³ (2.48 cu. yd.) bucket, 5.4-m (17 ft. 9 in.) arm, 10-m (32 ft. 10 in.) boom, and 900-mm (36 in.) double-bar grouser shoes																																													
10.5 m (35 ft.)																																													
9.0 m (30 ft.)																																													
7.5 m (25 ft.)																																													
6.0 m (20 ft.)																																													
4.5 m (15 ft.)																																													
3.0 m (10 ft.)																																													
1.5 m (5 ft.)																																													
Ground Line																																													
-1.5 m (-5 ft.)																																													
-3.0 m (-10 ft.)																																													
-4.5 m (-15 ft.)														12 310		12 310		16 580		16 580		25 350		24 580		23 330		17 050		18 910		12 780		15 630		10 020		13 060		8090		9370		6740	
														(27,930)		(27,930)		(37,880)		(37,880)		(58,530)		(52,790)		(50,440)		(36,670)		(40,850)		(27,480)		(33,710)		(21,540)		(28,070)		(17,400)					
-6.0 m (-20 ft.)														18 200		18 200		23 580		23 580		27 630		25 000		22 100		17 300		18 010		12 940		14 820		10 150		12 050		8280					
														(41,300)		(41,300)		(53,950)		(53,950)		(59,690)		(53,740)		(47,680)		(37,230)		(38,790)		(27,850)		(31,810)		(21,870)		(25,490)		(17,890)					
-7.5 m (-25 ft.)														25 380		25 380		31 580		31 580		24 810		24 810		19 990		17 760		16 250		13 300		13 000		10 520									
														(57,800)		(57,800)		(67,920)		(67,920)		(53,320)		(53,320)		(42,880)		(38,270)		(34,680)		(28,710)		(27,340)		(22,780)									
-9.0 m (-30 ft.)																																													

ZX870LC-6

ZAXIS | DASH-6 PRODUCTION-CLASS EXCAVATORS

Lift Charts

Boldface type indicates hydraulically limited capacity; **light**face type indicates stability-limited capacities, in kg (lb.). Ratings at bucket lift hook; machine equipped with standard gauge and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567 (with power boost).


Load Point Height	3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		10.5 m (35 ft.)		12.0 m (40 ft.)		13.5 m (45 ft.)	
Horizontal Distance from Centerline of Rotation																
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 2-m³ (2.63 cu. yd.) bucket, 4-4-m (14 ft. 5 in.) arm, 10-m (32 ft. 10 in.) boom, and 1020-mm (40 in.) double-bar grouser shoes																
10.5 m (35 ft.)												(21,430)	(21,430)	7660	7660	
9.0 m (30 ft.)												10 150	10 150	9760	9760	
												(22,130)	(22,130)	(21,450)	(21,450)	
7.5 m (25 ft.)												10 900	10 900	10 130	10 130	7460
												(23,660)	(23,660)	(22,110)	(21,730)	
6.0 m (20 ft.)							16 520	16 520	13 630	13 630	11 860	11 860	10 720	9840	10 030	7670
							(35,420)	(35,420)	(29,380)	(29,380)	(25,670)	(25,670)	(23,320)	(21,080)	(20,810)	(16,290)
4.5 m (15 ft.)							19 240	19 240	15 300	15 300	12 930	11 960	11 410	9440	10 420	7470
							(41,260)	(41,260)	(32,950)	(32,950)	(27,960)	(25,730)	(24,750)	(20,240)	(22,710)	(15,920)
3.0 m (10 ft.)							21 600	18 930	16 860	14 490	13 990	11 360	12 110	9040	10 850	7240
							(46,410)	(40,900)	(36,330)	(31,250)	(30,220)	(24,450)	(26,240)	(19,400)	(23,590)	(15,470)
1.5 m (5 ft.)							23 190	18 020	18 100	13 790	14 890	10 860	12 730	8690	11 230	7020
							(49,970)	(38,850)	(39,060)	(29,710)	(32,180)	(23,360)	(27,570)	(18,660)	(24,350)	(15,020)
Ground Line							23 960	17 520	18 920	13 310	15 550	10 490	13 190	8430	11 440	6850
							(51,760)	(37,720)	(40,870)	(28,660)	(33,600)	(22,540)	(28,550)	(18,080)	(24,580)	(14,690)
-1.5 m (~5 ft.)					13 350	13 350	24 070	17 320	19 270	13 050	15 880	10 260	13 400	8260	11 370	6780
					(31,420)	(31,420)	(52,080)	(37,240)	(41,660)	(28,070)	(34,320)	(22,050)	(28,960)	(17,740)		
-3.0 m (~10 ft.)			11 970	11 970	20 970	20 970	23 610	17 320	19 130	12 970	15 810	10 170	13 240	8220		
			(27,640)	(27,640)	(48,640)	(48,640)	(51,100)	(37,230)	(41,350)	(27,900)	(34,130)	(21,870)	(28,510)	(17,680)		
-4.5 m (~15 ft.)	15 260	15 260	20 150	20 150	27 960	25 380	22 560	17 490	18 430	13 060	15 210	10 250	12 440	8350		
	(34,670)	(34,670)	(46,110)	(46,110)	(60,590)	(54,510)	(48,790)	(37,620)	(39,780)	(28,110)	(32,730)	(22,060)	(26,420)	(18,050)		
-6.0 m (~20 ft.)	23 300	23 300	29 880	29 880	25 530	25 530	20 770	17 850	16 990	13 340	13 760	10 530				
	(52,950)	(52,950)	(68,530)	(68,530)	(55,120)	(55,120)	(44,760)	(38,420)	(36,480)	(28,750)	(29,210)	(22,750)				
-7.5 m (~25 ft.)			26 930	26 930	21 900	21 900	17 840	17 840	14 240	13 890						
			(57,740)	(57,740)	(46,870)	(46,870)	(38,010)	(38,010)	(29,900)	(29,900)						

Buckets

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through Hitachi parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force		Arm Dig Force		ME Arm Dig Force		Bucket Tip Radius		Number of Teeth
	mm	in.	m³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy-Duty High Capacity	914	36	2.09	2.7	2767	6,100	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	3
	1067	42	2.55	3.3	2972	6,552	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	4
	1219	48	3.02	3.9	3177	7,004	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	4
	1372	54	3.49	4.6	3558	7,844	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	5
Heavy Capacity Dirt	1524	60	3.98	5.2	3572	7,875	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	5
	1829	72	4.96	6.5	3786	8,346	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	6
	2032	80	5.63	7.4	4519	9,963	360	80,973	264	59,251	230	51,673	361	81,247	2426	95.53	6
	2286	90	5.81	7.6	4296	9,471	341	76,746	268	60,338	275	61,782	370	83,150	2303	90.66	7
Heavy-Duty	914	36	1.51	2.0	2510	5,534	372	83,647	276	62,098	300	67,336	384	86,270	2113	83.19	3
	1067	42	1.86	2.4	2761	6,087	372	83,647	276	62,098	300	67,336	384	86,270	2113	83.19	4
	1219	48	2.22	2.9	2935	6,471	372	83,647	276	62,098	300	67,336	384	86,270	2113	83.19	4
	1372	54	2.58	3.4	3091	6,814	372	83,647	276	62,098	300	67,336	384	86,270	2113	83.19	5
Truck Loading	1524	60	2.95	3.9	3232	7,125	372	83,647	276	62,098	300	67,336	384	86,270	2113	83.19	5
	2134	84	4.21	5.5	3285	7,242	363	81,638	274	61,607	238	53,456	380	85,393	2165	85.22	6
	2337	92	4.63	6.0	3598	7,932	363	81,638	274	61,607	238	53,456	380	85,393	2165	85.22	8

Bucket Selection Guide* ZX670LC-6

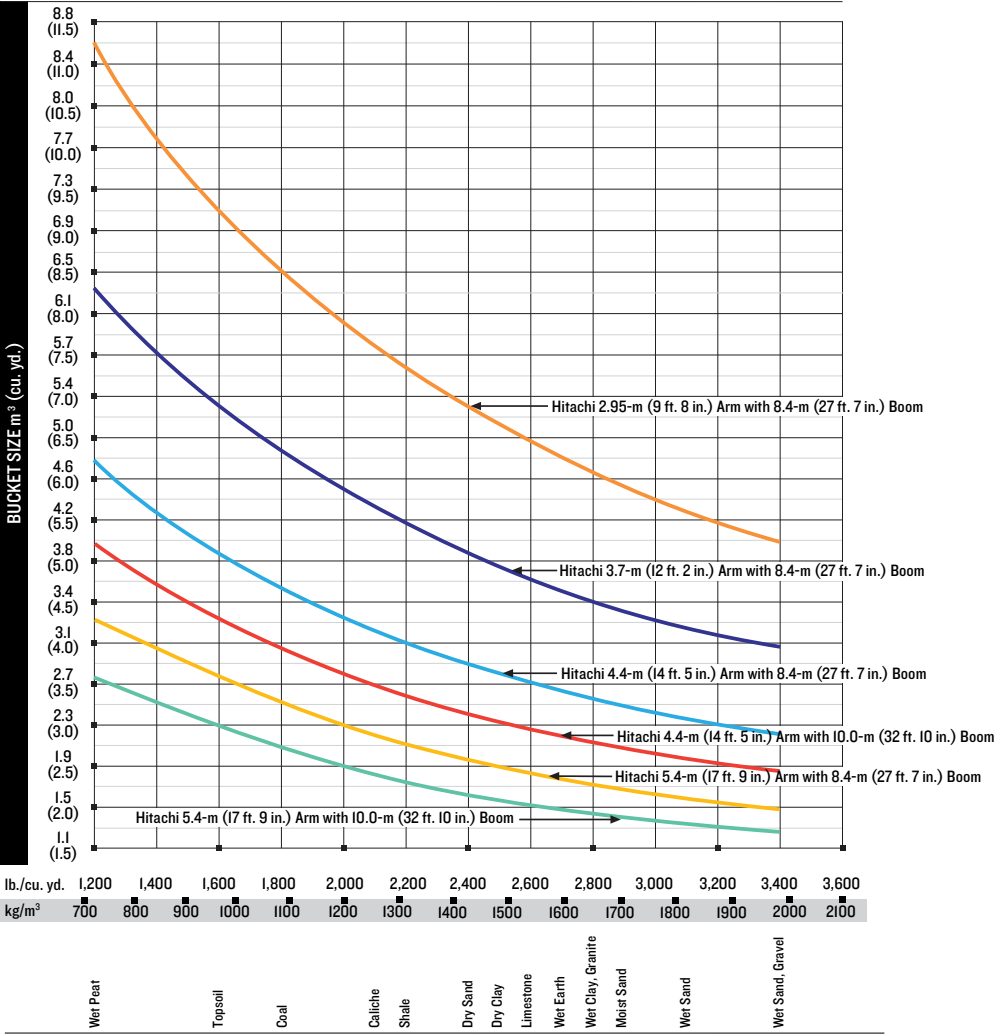

*Contact your Hitachi dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

ADDITIONAL EQUIPMENT

Key: ● Standard ▲ Optional or special kit

670	870	Engine
●	●	Auto-idle system
●	●	Batteries (2 – 12 volt), 280-min. reserve capacity
●	●	Coolant expansion tank
●	●	Dual-element dry-type air filter
●	●	Electronic engine control
●	●	Enclosed fan guard (conforms to SAE J1308)
●	●	Engine coolant to –37 deg. C (–34 deg. F)
●	●	Automatic belt-tension device
●	●	Fuel filter with water separator
●	●	Full-flow oil filter
●	●	Turbocharger with charge air cooler
●	●	Cool-on-demand hydraulic-driven fan
●	●	Glow-plug start aid
●	●	500-hour engine-oil-change interval
●	●	70% (35 deg.) off-level capability
●	●	Hydraulic fan reverser
		Hydraulic System
●	●	Reduced-drift valve for boom down, arm in
●	●	Auxiliary hydraulic valve section
●	●	Spring-applied, hydraulically released automatic swing brake
●	●	Auxiliary hydraulic-flow adjustments through monitor
●	●	Auto power lift
●	●	4,000-hour hydraulic-oil-change interval
▲	▲	Single-pedal propel control
▲	▲	Control pattern change valve
		Undercarriage
●	●	Planetary drive with axial piston motors
●	●	Propel motor shields
●	●	Spring-applied, hydraulically released automatic propel brake
●	●	Track guides, front idler and center
●	●	2-speed propel
●	●	Upper carrier rollers (3)
●	●	Sealed and lubricated track chain
▲	▲	Double-bar grouser shoes, 650 mm (26 in.)
▲	▲	Double-bar grouser shoes, 750 mm (30 in.)
▲	▲	Double-bar grouser shoes, 900 mm (36 in.)
▲	▲	Double-bar grouser shoes, 1020 mm (40 in.)

670	870	Upperstructure
●	●	Right-hand and left-hand mirrors
●	●	Vandal locks with ignition key: Cab door / Fuel cap / Service doors / Toolbox
●	●	Debris screen in side panel
●	●	Remote-mounted engine oil and fuel filters
●	●	Service platform, left side
●	●	Service handrails
▲	▲	Counterweight-removal system
		Front Attachments
●	●	Centralized lubrication system
●	●	Dirt seals on all bucket pins
●	●	No-boom-arm option
▲	▲	Boom, 7.8 m (25 ft. 7 in.)
▲	▲	Boom, mass excavating, 6.8 m (22 ft. 4 in.)
▲	▲	Arm, mass excavating, 2.9 m (9 ft. 6 in.)
▲	▲	Arm, 3.6 m (11 ft. 10 in.)
▲	▲	Arm, 4.2 m (13 ft. 9 in.)
▲	▲	Arm, 5.3 m (17 ft. 5 in.)
▲	▲	Boom, 8.4 m (27 ft. 7 in.)
▲	▲	Boom, 10 m (32 ft. 10 in.)
▲	▲	Boom, mass excavating, 7.1 m (23 ft. 4 in.)
▲	▲	Arm, mass excavating, 2.95 m (9 ft. 8 in.)
▲	▲	Arm, 3.7 m (12 ft. 1 in.)
▲	▲	Arm, 4.4 m (14 ft. 5 in.)
▲	▲	Arm, 5.4 m (17 ft. 9 in.)
▲	▲	Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth
		Operator's Station
●	●	Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
●	●	AM/FM radio
●	●	Auto climate control / air conditioner / heater / pressurizer
●	●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
●	●	Coat hook
●	●	Deluxe-suspension cloth seat with 100-mm (4 in.) adjustable armrests
●	●	Floor mat
●	●	Front windshield wiper with intermittent speeds
●	●	Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
●	●	Horn, electric
●	●	Hour meter, electric
●	●	Hydraulic shutoff lever, all controls

670	870	Operator's Station (continued)
●	●	Hydraulic warm-up control
●	●	Interior light
●	●	Large cup holders (2)
●	●	Machine Information Center (MIC)
●	●	Mode selectors (illuminated): Power modes (3) / Travel modes (2) / Work modes (2)
●	●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine-air-cleaner-restriction indicator light, engine check, engine-coolant-temperature indicator light with audible alarm, engine-oil-pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault-code-alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator and work-mode indicator
●	●	Fluid-level switch and indicator light for engine coolant and engine oil
●	●	Motion alarm with cancel switch (conforms to SAE J994)
●	●	Power-boost switch on right console lever
●	●	Propel pedals and levers
●	●	SAE 2-lever control pattern
●	●	Seat belt, 51 mm (2 in.), retractable
●	●	Tinted glass
●	●	Transparent tinted overhead hatch
●	●	Hot/cold beverage compartment
▲	▲	Protection screens for cab front
▲	▲	Seat belt, 76 mm (3 in.), non-retractable
▲	▲	Window vandal-protection covers
		Electrical
●	●	50-amp alternator
●	●	Blade-type multi-fused circuits
●	●	Positive-terminal battery covers
●	●	Battery disconnect switch
●	●	ZXLink™ wireless communication system (available in specific countries; see your dealer for details)
▲	▲	Cab extension wiring harness
		Lights
●	●	Work lights: Halogen / 2 mounted on boom / 1 mounted on frame / 2 mounted on top of cab

See your Hitachi dealer for further information.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 2000-m (6,560 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1370-mm (54 in.) buckets, full fuel tanks and 79-kg (175 lb.) operators; a ZX670LC-6 unit with 9800-kg (21,605 lb.) counterweight; counterweight removal device and 900-mm (36 in.) double-bar grouser shoes; and a ZX870LC-6 unit with 12 400-kg (27,337 lb.) counterweight; counterweight removal device and 900-mm (36 in.) double-bar grouser shoes.

HITACHI

hitachiconstruction.com