

# HITACHI

## *EH 1600*

**Maximum Payload**  
89,7 Tonne (98.9 Ton)

**Maximum Payload  
with Standard Liners**  
85,7 Tonne (94.4 Ton)

**Maximum GMW**  
160 613 kg (354,086 lb)

**Engine**  
Cummins QST 30  
Rated Output 783 kW (1,050 hp)



Specifications: EH1600



ENGINE

Make	Cummins			
Model	QST 30			
Type	4 Cycle			
Aspiration	Turbocharged/Aftercooled			
Rated Output				
(SAE @ 2100 rpm)	kW	hp	783	1,050
Maximum Torque				
@ 1300 rpm	N•M	lb/ft	4 630	3,415
Flywheel Output				
(SAE @ 2100 rpm)	kW	hp	732	982
No. Cylinders	12			
Bore & Stroke	mm	159 x 159		
	in	6 1/4 x 6 1/4		
Displacement	liters	in³	37,7	2,300
Torque Rise	30%			
Starting	Electric			



TRANSMISSION

Allison DP-8963, planetary type, full automatic shift. Integral torque converter with automatic lock-up to lock-up shifting in all ranges. Remote mounted, 6 forward speeds, 1 reverse. Allison Commercial Electronic Control provides park brake interlock and hoist interlock as well as built in diagnostics.

Maximum Speeds @ Governed Engine Speed with standard 27.00R49(\*\*)E4 tires or Michelin 31/80R49E4 Tires.

		27.00R49		31/80 R49	
Range	Gear Ratio	km/h	mph	km/h	mph
1	4.24	10,0	6.2	9,5	5.9
2	2.32	18,2	11.3	17,4	10.8
3	1.69	24,9	15.5	23,8	14.8
4	1.31	32,2	20.0	30,7	19.1
5	1.00	42,2	26.2	40,2	25.0
6	0.72	58,6	36.4	55,8	34.7
R	5.75	7,4	4.6	6,9	4.3



DRIVE AXLE

Power is transferred to wheels through a Euclid model 2657 differential with an externally removable pinion seal and roller bearing open differ-ential. Full floating axle shafts drive the Euclid model 1080 heavy duty planetaries in each wheel. The parallel link mounting with an "A-frame" top member reduces "roll-steer" effect.

Ratios	Standard			
Differential	3.15:1			
Planetary	8.00:1			
Total Reduction	25.20:1			
Maximum Speed				
with 27.00R49(**)E4 Tires	km/h	mph	58,6	36.4
with 31/80R49E4 Tires	km/h	mph	55,8	34.7



TIRES

Standard - Front and Rear	Rim Width			
27.00R49(**)E4 Radial	mm	in	495	19.5
Optional				
31/80 R49E4 Radial Michelin	mm	in	559	22.0



ELECTRICAL SYSTEM

Twenty-four volt lighting and accessories system. 100 amp alternator with integral transistorized voltage regulator. Two 1150 amp, cold cranking, 12-volt, maintenance-free, heavy-duty batteries connected in series/parallel. Standard CONTRONIC II monitoring and central warning system with built-in diagnostics and a standard Liquid Crystal Display (LCD) in the cab.



BODY CAPACITY

	m³	yd³
Struck (SAE)	35,4	46.3
Heap 3:1	50,0	65.4
Heap 2:1 (SAE)	57,1	74.6



WEIGHTS

	kg	lb
Chassis & Hoists	57 085	125,850
Body	13 835	30,500
Net Machine Weight	70 920	156,350

Maximum GMW with Standard Tires		
Including Options, 50% Fuel,		
Operator & Payload Not to Exceed	160 613	354,086

Maximum Payload	89 693	197,736
-----------------	--------	---------

Major Options		
Approximate change in Net Machine Weight:		
Regular Duty Body Liners - 400 BHN Steel 4 030		8,884

Max. Payload with Regular Duty		
Body Liners, Complete	85 663	188,852

Load Weight Distribution	FRONT	REAR
	33%	67%



STEERING SYSTEM

Closed-center, full-time hydrostatic power steering system using two double-acting cylinders, pressure limit compensated piston pump, and a brake actuation/steering system reservoir. An accumulator provides supplementary steering in accordance with SAE J1511 and ISO 5010. A tilt/telescopic steering wheel with 35 degrees of tilt and 57,15 mm 2 1/4" telescopic travel is standard.

Steering Angle				38°
Turning Diameter (SAE)	m	ft	21,8	71.6
Steering Pump Output				
(@ 2100 rpm)	l/m	gpm	158,1	41.8
System Operating Pressure	kPa	psi	18 961	2,750



HYDRAULIC SYSTEM

Two (2) Euclid two-stage cylinders, double-acting in second stage, internal dampened (extend and retract) inverted and outboard-mounted. Separate hoist/brake cooling reservoir and independent tandem gear pump. Electronically operated control valve. Hoist lever can be mounted on left or right of seat. Equipped with body up speed restriction.

Body Raise Time (Loaded)	s		12.8	
Body Float Down Time	s		12.1	
Brake Cooling Pump Output	l/m	gpm	469,4	124.0
(@ 2100 rpm)				
Hoist Pump Output	l/m	gpm	449,0	118.4
(@ 2100 rpm)				
System Relief Pressure	kPa	psi	20 340	2,950



BRAKE SYSTEM

Brake systems meet or surpass SAE J/ISO 3450.

The Hitachi EH1600 is equipped with an all-hydraulic actuated braking system providing precise braking control and quick system response. The brake control valve is actuated directly at the brake pedal. The controller has a unique variable front to rear brake proportioning that maximizes the stopping performance under slippery road conditions and accounts for weight transfer without having to deactivate front brakes.

Service  
Service brakes are all hydraulically actuated. Front disc brakes have two calipers per disc that are internally ported, each containing three pairs of opposing pistons. Rear brakes are oil-cooled wet discs.

Front Axle – Dry Disc				
Disc Diameter Each (2 discs/axle)	cm	in	101,6	40
Brake Surface Area Per Axle	cm²	in²	14 194	2,200
Lining Area Per Axle	cm²	in²	4 129	640
Brake Pressure (Max.)	kPa	psi	13 790	2,000

Rear Axle – Oil-Cooled Wet Disc				
Brake Swept Area Per Axle	cm²	in²	79 282	12,288
Brake Pressure (Max.)	kPa	psi	10 515	1,525

Secondary  
Two independent circuits within the service brake system provide back-up stopping capability. System is manually or automatically applied to stop machine within prescribed braking distance.

Parking  
Dry disc mounted on differential input shaft. Two heads, 90° apart, self-adjusting and spring applied, hydraulic release. Controlled by a toggle switch on the dash or automatically applied if brake hydraulic pressure is lost.

Size (Diameter)	mm	in	685,8	27
-----------------	----	----	-------	----


Retarder  
Foot-operated valve controls all-hydraulic actuation of oil-cooled wet disc brakes on rear axle. System provides constant speed control on downhill hauls.

Capacity				
Continuous	kW	hp	1 051	1,410
Intermittent	kW	hp	1 820	2,440




WET DISC BRAKE

The Euclid wet disc brake is engineered for long service life even in the most extreme environments. The wet disc brakes are located on the rear axle and provide service braking, secondary braking and retarding. The brakes are of a multi-plate design and continuously oil-cooled. The sealed design protects against environmental contamination for prolonged service life. The wet disc brake is designed with automatic retraction and self-adjusting features to prevent drag and compensate for wear. Separate pedals activate the service braking and retarding functions to help the operator keep both hands on the steering wheel.

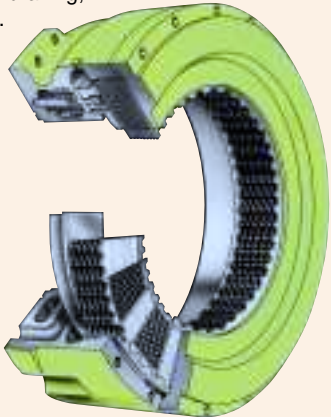

COMMAND CAB III

COMMAND CAB III  
Integral ROPS/FOPS (Rollover Protection Structure) is standard in accordance with SAE J/ISO 3471. Dimensions comply with SAE J/ISO 3411. Double wall construction of 11 gauge inner and outer steel panels, lends itself to a more structurally sound cab. Foam rubber lining material along with foam rubber-backed carpeting and multiple layered floor mat act to absorb sound and control interior temperature. A properly maintained cab from Euclid, tested with doors and windows closed per work cycle procedures in SAE J1166, results in an operator sound exposure Leq (Equivalent Sound Level) of 80 dB(A). A three-point rubber iso-mount arrangement to the deck surface minimizes vibration to the operator compartment.

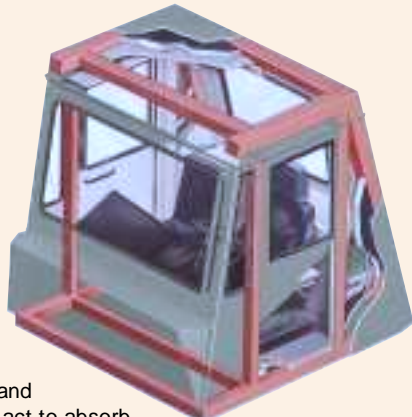

Excellent Serviceability  
A removable front panel allows easy access to service brake valves, retarder valve and heater assembly. The upper dash utilizes four (4) removable panels that house gauges and customer options, each individually accessible. A removable panel located behind the seat provides easy access to the shifting control, CONTRONIC II, and all electrical junction points.

Comfort and Ease of Operation  
A wrap-around style dashboard positions controls within easy reach and visual contact. A full complement of easy-to-read gauges, CONTRONIC II monitoring and warning system with Liquid Crystal Display (LCD), a spacious environment, six-way adjustable mechanical seat, tilt/ telescopic steering wheel, filtered ventilation, door locks, and a padded trainer seat, all contribute to operator convenience and comfort.






SUSPENSION

**Front Suspension**  
Independent trailing arm for each front wheel. NEOCON struts containing energy-absorbing gas and environmentally friendly compressible NEOCON-E™ fluid mounted between trailing arm and frame.

**Rear Suspension**  
The cast rear axle housing has a parallel link mounting with an A-Frame top member. This provides a reduced “roll-steer” effect which results in a more stabilized ride and contributes to lower overall frame stress levels. Outboard-mounted NEOCON struts suspend drive axle from frame. NEOCON struts provide variable damping and rebound feature.

The unique trailing arm front suspension absorbs haul road input, minimizing suspension-induced frame twisting while providing independent tire action. Ride struts are mounted with spherical bushings, eliminating extreme sidewall forces by ensuring a purely axial input to the ride strut. The wide track stance of the trailing arm design and long wheel base assure a more stable, comfortable ride. The suspension struts employ gas and NEOCON-E™ fluid as the energy-absorbing media. This suspension continues to absorb energy when extreme dynamic loads are generated which significantly contributes to improved isolation of the operator

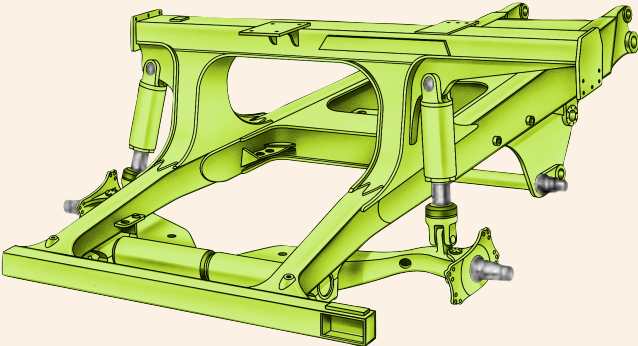

and machine components.  
The Euclid frame and suspension are designed to work in unison to provide maximum structural integrity and operator comfort. The formed rectangular frame rail construction provides superior resistance to bending and torsional loads while eliminating unnecessary weight. Euclid achieves long frame fatigue life through proven design and manufacturing practices. Smooth frame transitions minimize stress concentrations and steel castings effectively distribute input loads. Frame life is further enhanced by utilizing fatigue resistant weld joints and locating welds in low stress areas.



FRAME

Formed rectangular rails with section height tapered from rear to front, bridged by five cross members, front bumper and front suspension tube. Cross member to frame junctions use large radii to minimize stress. Frame utilizes 345 MPa **50,000 psi** yield strength steel.



BODY

Flat chute type, sloped floor, continuously exhaust heated. High tensile strength 400 BHN abrasion resistant alloy steel is used in thickness of:

	mm	in
Floor	17	11/16
Front	8	5/16
Sides	8	5/16
Canopy	5	3/16
Corner	11	7/16

Optional Body Liners (Regular Duty)		
Floor, Corners & Top Rails	10	3/8
Sides, Front, End Protection	6	1/4

Optional Body Liners (Heavy Duty)		
Floor & Corners	16	5/8
Top Rails	10	3/8
Sides, Front & End Protection	8	5/16
Canopy	6	1/4

The horizontal stiffener design of the Euclid body minimizes stress concentrations in any one area. Load shocks are dissipated over the entire body length. The closely-spaced floor stiffeners provide additional protection by minimizing distances between unsupported areas.



SERVICE CAPACITIES

	liters	gallons
Accumulator	37,9	10.0
Crankcase (incl. filters)	140,0	37.0
Transmission (incl. filters)	98,4	26.0
Cooling System	268,7	71.0
Fuel Tank	1 003,0	265.0
Hydraulic		
Hoist System	318,0	84.0
Steering System	117,0	31.0
Differential	140,1	37.0
Planetaries (both sides)	174,1	46.0
Windshield washer	7,6	2.0

STANDARD EQUIPMENT


- GENERAL**
- Air conditioning
  - All-hydraulic braking
  - Automatic transmission shifting
  - Battery disconnect switch
  - Body down indicator, mechanical
  - Body prop cable
  - Body up and down cushioning
  - Body up speed restriction w/light
  - Canopy spill guard
  - Continuous heated body
  - Cooling system surge tank
  - Dagger clamps (rear wheels)
  - Driveline guard, front
  - Electric horns
  - Electric start
  - Electronic hoist control
  - Engine belt protection
  - Fan guard
  - Fenders
  - Fixed steering stops
  - Front brake cut-off switch
  - Fuel tank sight gauge
  - Guard rails
  - HID headlights
  - Hoist interlock
- CAB**
- Acoustical lining
  - Air filtration/replaceable element
  - Ash tray
  - Cab interior light
  - Cigar lighter, 12-volt
  - Door locks
  - Foot rest (left and right)
  - Heater and defroster 7.6 kW 26,000 btu
  - Integral ROPS/FOPS cab
  - ISO driver envelope
  - Liquid Crystal Display\* (CONTRONIC II)
  - Clutch pressure
  - Distance traveled
  - Engine oil pressure
  - Fuel gauge
  - Gear selection
  - Integrated transmission diagnostics
  - Load counter
- GAUGES AND INDICATORS**
- CONTRONIC II monitoring and alarm system, multi-function indicator lights:
- Air filter restriction
  - Alternator
  - Body up
  - Brake pressure
  - Central warning
  - Converter temperature
  - Cooling temperature
  - Do not shift
  - Engine oil pressure
  - High beam indicator
  - Hydraulic filter
  - Parking brake applied
  - Retard oil temperature
  - Steering filter
  - Steering pressure
  - Steering temperature
  - Transmission filter
  - Transmission oil pressure
  - Turn signals/hazard
  - Transmission malfunction
- MACHINE LIGHTS**
- Back-up lights, (2)
  - Clearance lights (LED), (4)
  - Dual combination stop and taillights (LED), (2)
- Service intervals,**
- job site adjustable
  - Total engine hours
  - Total idle hours
  - Voltmeter
  - Modular instrumentation
  - Quick connect test ports
  - Roll down windows
  - Rubber floor mat
  - Safety glass
  - Seat belts, retractable (operator and trainer)
  - Seat, mechanical 6 position
  - Sun visor
  - Tilt/telescopic steering wheel
  - Tinted glass all windows
  - Trainer seat
  - Windshield washer
  - Windshield wiper, intermittent
  - 12-volt 50 amp circuit
  - 12-volt accessory connection

OPTIONAL EQUIPMENT




- ACTIVE TRACTION CONTROL (ATC) W/ELECTRONIC DOWNHILL SPEED CONTROL (EDSC)**
- Air suspension seat
  - Body liners (400 BHN) plates, regular and heavy duty
  - Canopy spill guard extension
  - Cold starting aid
  - Engine compartment lights
  - Engine, ground level shut-off
- Engine heater (oil & coolant)**
- Extra reverse alarm
  - Fast fueling, fuel only
  - Fast coupling service center
  - HAULTRONIC II load weighing system
  - Lube system, automatic
  - Lube system, centralized
  - Radio & tape player
  - Tires (size, type & rating)

Standard and optional equipment may vary from country to country. Special options provided on request. All specifications are subject to change without notice.

**Note:** Dimensions shown are for empty machine with 27.00R49(\*\*)E4 tires.

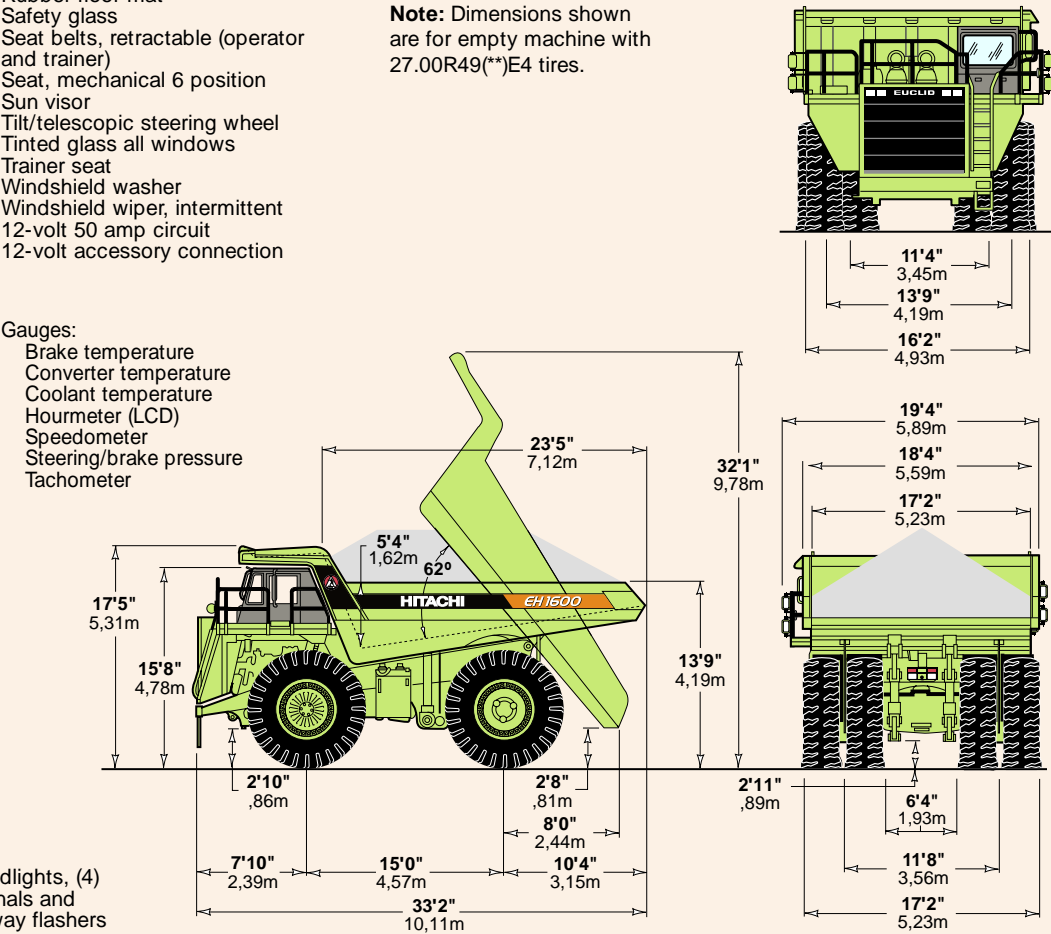

# Performance Data: EH1600

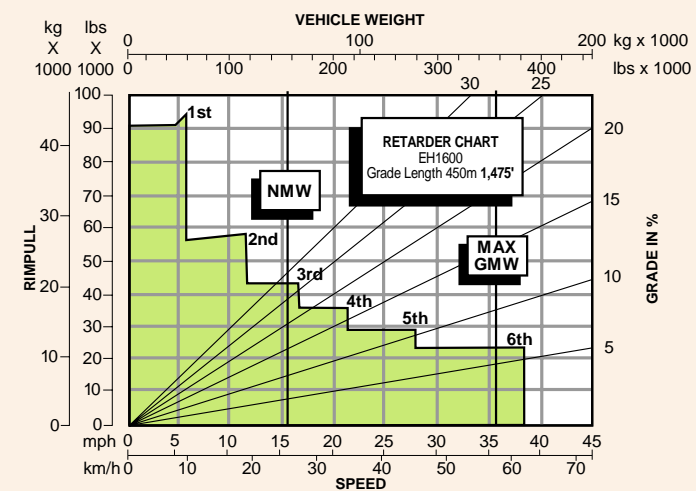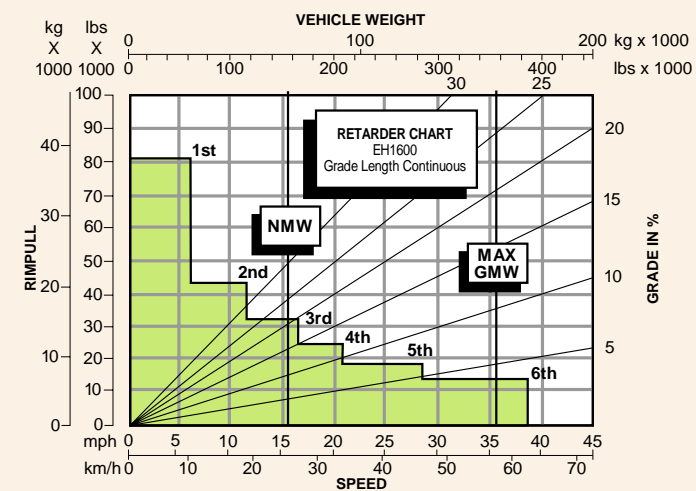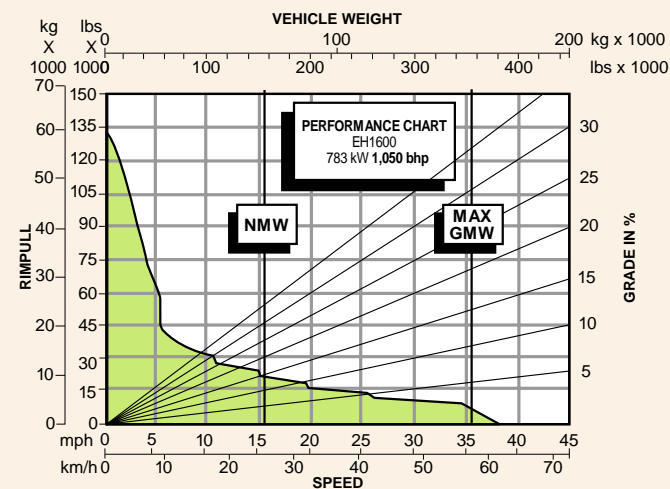

## INSTRUCTIONS:

Diagonal lines represent total resistance (Grade % plus rolling resistance %). Charts based on 0% rolling resistance, standard tires and gearing unless otherwise stated.

1. Find the total resistance on diagonal lines on right-hand border of performance or retarder chart.
2. Follow the diagonal line downward and intersect the NMW or GMW weight line.
3. From intersection, read horizontally right or left to intersect the performance or retarder curve.
4. Read down for machine speed.

**NOTE:** Photos and illustrations throughout may show optional equipment.

*Under our policy of continuous product improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.*

Hitachi Construction Machinery (America) Corp.  
20411 Imperial Valley Dr.  
Houston, Texas 77073  
281-821-2400  
[www.hcmacorp.com](http://www.hcmacorp.com)



FORM NO. EH1600  
DATE 7/01  
Printed in U.S.A.