





MAX. OPERATING WEIGHT: MONO 23202kg (51151lbs) / TAB 23273kg (51308lbs) ENGINE POWER: 128kW (172hp)

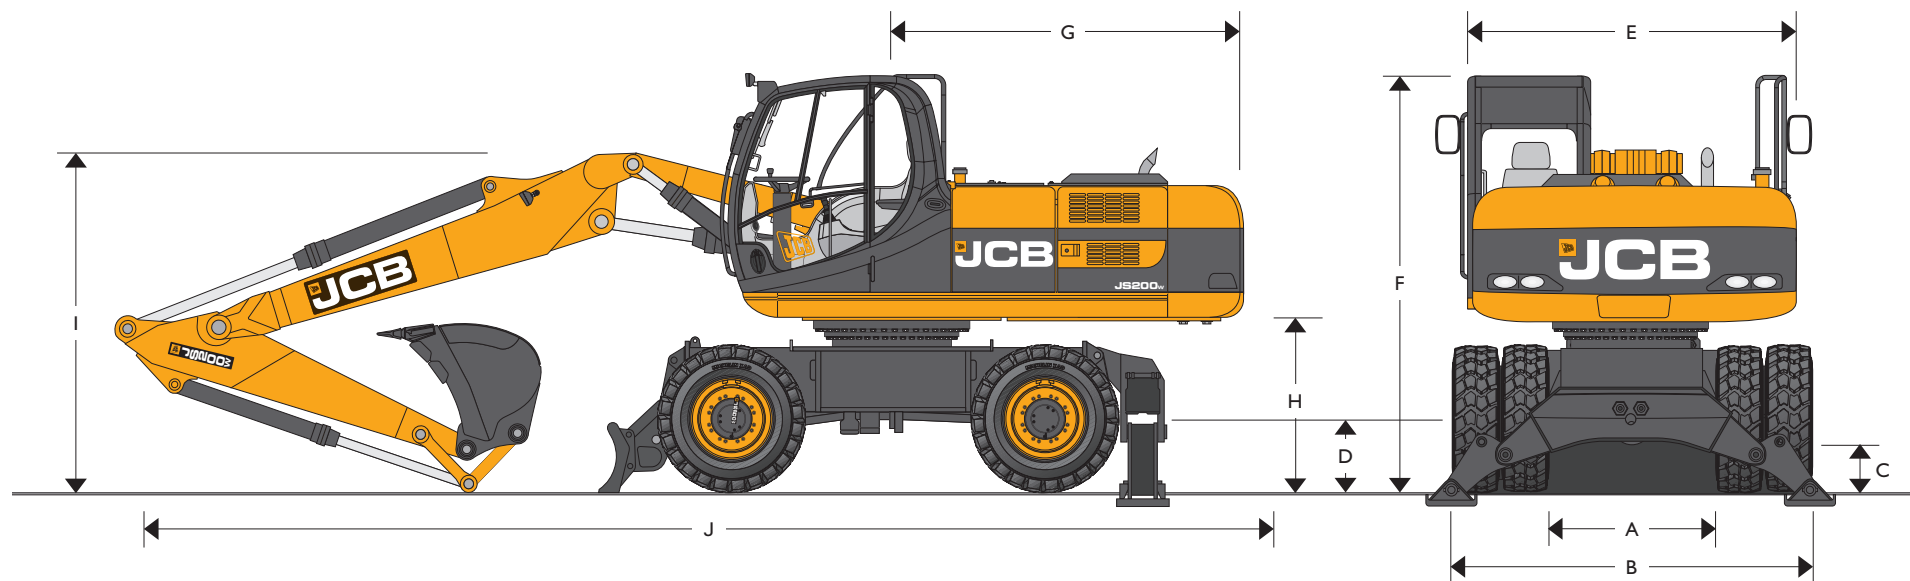

### STATIC DIMENSIONS


| Dimensions in millimetres (ft-in)        |             |
|------------------------------------------|-------------|
| A Internal width between dual wheels     | 1330 (4-4)  |
| B External width over dual wheels        | 2530 (8-4)  |
| C Ground clearance                       | 260 (0-10)  |
| D Height to axle centre line dual wheels | 515 (1-8)   |
| Height to axle centre line single wheels | 556 (1-9)   |
| E Overall width (handrail removed)       | 2500 (8-2)  |
| F Height over cab                        | 3250 (10-8) |
| G Tail length                            | 2530 (8-3)  |
| H Clearance under counterweight          | 1335 (4-4)  |

#### Monoboom 5.70m (18-8)




| Dipper length           |            | 1.91m (6-3) | 2.40m (7-10) | 3.00m (9-10) |
|-------------------------|------------|-------------|--------------|--------------|
| I Transport boom height | mm (ft-in) | 3120 (10-2) | 3200 (10-6)  | 3050 (10-0)  |
| J Transport length      | mm (ft-in) | 9450 (31-0) | 9450 (31-0)  | 9330 (30-7)  |

#### Triple articulated boom 5.63m (18-6)




| Dipper length           |            | 1.91m (6-3)  | 2.40m (7-10) | 3.00m (9-10) |
|-------------------------|------------|--------------|--------------|--------------|
| I Transport boom height | mm (ft-in) | 3320 (10-10) | 3400 (11-1)  | 3700 (12-1)  |
| J Transport length      | mm (ft-in) | 9175 (30-1)  | 9190 (30-1)  | 9200 (30-2)  |

## CHASSIS OPTIONS

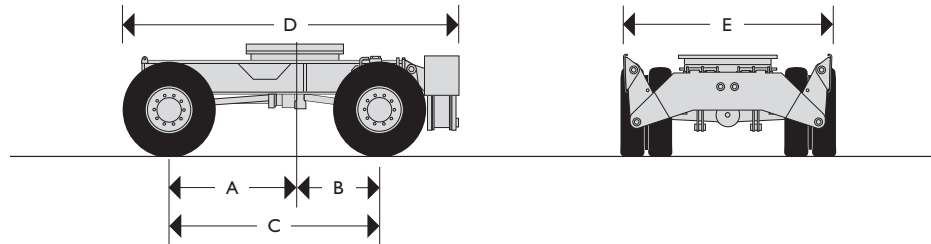

## Dimensions in millimetres (ft-in)


|   |                                   |             |
|---|-----------------------------------|-------------|
| A | Centre of slew ring to front axle | 1507 (4-11) |
| B | Centre of slew ring to rear axle  | 1250 (4-1)  |
| C | Wheelbase                         | 2757 (9-0)  |
| D | Length including rear stabilizers | 4350 (14-3) |
| E | Width over stabilizers (raised)   | 2523 (8-3)  |

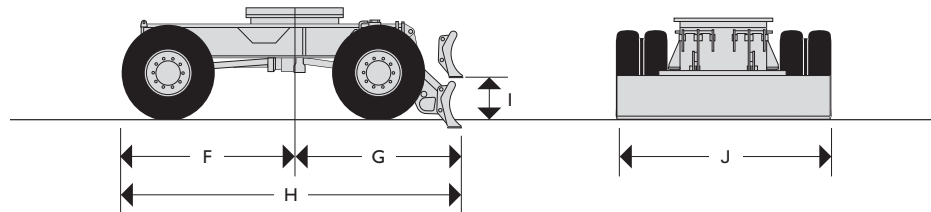

## Dimensions in millimetres (ft-in)


|   |                                                     |             |
|---|-----------------------------------------------------|-------------|
| F | Centre of slew ring to face of front tyre           | 2047 (6-8)  |
| G | Centre of slew ring to rear dozer blade (lowered)   | 2425 (7-11) |
| H | Length including rear dozer blade (raised)          | 4470 (14-8) |
| I | Ground level to bottom of rear dozer blade (raised) | 450 (1-4)   |
| J | Dozer blade width                                   | 2530 (8-4)  |

## CHASSIS OPTIONS

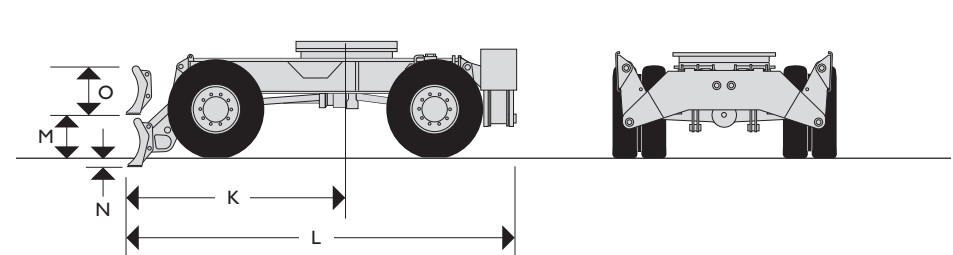

## Dimensions in millimetres (ft-in)

|   |                                                       |             |
|---|-------------------------------------------------------|-------------|
| K | Centre of slew ring to front dozer blade (lowered)    | 2760 (9-0)  |
| L | Length including stabilizers and dozer blade (raised) | 5060 (16-7) |
| M | Ground level to bottom of front dozer blade (raised)  | 450 (1-5)   |
| N | Dozer blade dig depth                                 | 130 (0-5)   |
| O | Dozer blade height                                    | 600 (1-11)  |

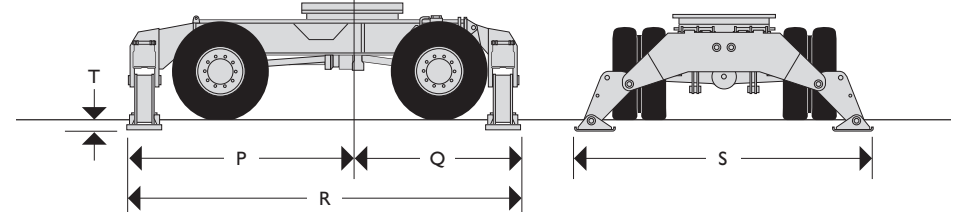

## Dimensions in millimetres (ft-in)

|   |                                             |             |
|---|---------------------------------------------|-------------|
| P | Centre of slew ring to front stabilizers    | 2632 (8-7)  |
| Q | Centre of slew ring to rear stabilizers     | 2300 (7-6)  |
| R | Length including front and rear stabilizers | 4932 (16-2) |
| S | Width over stabilizers (lowered)            | 3765 (12-4) |
| T | Stabilizer lift height                      | 201 (0-7)   |



## ENGINE

|                                    |                                                                                                                                                       |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                               | Isuzu 4HK1X water cooled, 4-stroke, 4-cylinder in-line, direct injection, common rail turbocharged intercooled diesel. Stage III emissions compliant. |
| Rated power (ISO14899 (SAE J1995)) | 128kW (172hp) @ 2000rpm                                                                                                                               |
| Piston displacement                | 5.193 litres (1.14 UK gal).                                                                                                                           |
| Starting system                    | 24 volt.                                                                                                                                              |
| Batteries                          | 2 x 12 volt Heavy Duty.                                                                                                                               |
| Alternator                         | 24 volt 50 amp.                                                                                                                                       |

## SWING SYSTEM

|             |                                                                          |
|-------------|--------------------------------------------------------------------------|
| Drive train | Axial piston motor and planetary reduction final drive.                  |
| Swing brake | Hydraulic braking plus automatic spring applied disc type parking brake. |
| Swing speed | 10RPM                                                                    |
| Swing gear  | Large diameter, internally toothed fully sealed grease bath lubricated.  |
| Swing lock  | Multi position switchable brake and mechanical lock.                     |

## CHASSIS

|                                            |                                                                              |
|--------------------------------------------|------------------------------------------------------------------------------|
| Structure                                  | High strength section.                                                       |
| Chassis Options:                           |                                                                              |
| Dozer Blade                                | Front and rear pin mount.                                                    |
| Stabilisers                                | Front or rear pin mount, independently operable – plus combinations.         |
| Grab Stowage                               | Heavy-duty, pin mounted stowage bar.                                         |
| Transmission                               | Hydrostatic drive via piston motor and powershift transmission.              |
| Travel speed                               | Creep speed 3kph (2mph)<br>Low ratio 8kph (5mph)<br>High ratio 30kph (19mph) |
| Drawbar pull                               | 99.4kN                                                                       |
| Axles                                      | Four wheel drive. Front steering axle oscillates for rough ground mobility.  |
| Axle load capacity                         | 40 tonnes                                                                    |
| Axle oscillation                           | +/- 8.5 degrees                                                              |
| Ground clearance                           | 335mm (1ft 1in)                                                              |
| Steering                                   | Fully hydraulic system.                                                      |
| Turning radius                             |                                                                              |
| To outside of tyres                        | 6.61m (21ft 8in)                                                             |
| To outer edge of front mounted dozer blade | 7.23m (23ft 9in)                                                             |
| Brakes                                     | All hydraulic, dual circuit brake system.                                    |
| Parking Brake                              | Built into the transmission.                                                 |

## EXCAVATOR END

|                      |                                                                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Booms                | Monoboom or triple articulation boom with choice of dipper lengths to match the requirements of reach, lift capacity and tearout. |
| Bucket tipping links | Fabricated type with choice of max capacity lift and no-lift point – with link stowage lock (grab work).                          |



## MAIN HYDRAULIC SYSTEM

|                                         |                                                                                                                           |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>System</b>                           | Load-sensed hydraulic system with variable flow piston pump providing flow-on-demand for maximum efficiency.              |
| <b>Main pump</b>                        | Variable displacement axial piston type                                                                                   |
| Maximum flow                            | 2 x 214 l/min (93 UK gpm)                                                                                                 |
| Main circuit pressure                   | 343 bar (4879 lb/in <sup>2</sup> )                                                                                        |
| With power boost                        | 372 bar (5395 lb/in <sup>2</sup> )                                                                                        |
| <b>Servo pump</b>                       | Gear type                                                                                                                 |
| Maximum flow                            | 31 l/min (7 UK gpm)                                                                                                       |
| Servo pressure                          | 40 bar (580 lb/in <sup>2</sup> )                                                                                          |
| <b>Optional Circuits:</b>               |                                                                                                                           |
| <b>Hammer</b>                           | Includes automatic engine speed setting and return filter.                                                                |
| Maximum flow                            | 200 l/min (44 UK gpm)                                                                                                     |
| Maximum pressure                        | 314 (343) bar (4554/4975 lb/in <sup>2</sup> )                                                                             |
| Hammer/auxiliary combined               | (pre-set to 180 bar) (2610 lb/in <sup>2</sup> )                                                                           |
| <b>Bucket to grab operation</b>         |                                                                                                                           |
| Maximum flow                            | 138 l/min (30 UK gpm)                                                                                                     |
| Maximum pressure for grab ram operation | 330 (343) bar (4785/4975 lb/in <sup>2</sup> )                                                                             |
| <b>Low Flow Pipework</b>                | Two options available, one with 20L/min (4 UK gpm) flow and a second with an adjustable flow of 27-45L/min (6-10 UK gpm). |
| <b>Hydraulic Cylinders</b>              | With hardened, chromed piston rods and end cushioning on boom, dipper and bucket crowd cylinder.                          |
| <b>Filtration</b>                       |                                                                                                                           |
| In tank                                 | 150 micron, suction strainer.                                                                                             |
| Main return line                        | 10 micron, fibreform element.                                                                                             |
| Pilot line                              | 10 micron, paper element.                                                                                                 |
| Plexus by pass line                     | 1.5 micron paper element.                                                                                                 |
| Hydraulic hammer return                 | 10 micron, reinforced microform element.                                                                                  |

## TYRES

|                |                                           |
|----------------|-------------------------------------------|
| <b>Twins</b>   | 11.00 x 20 tyres (16PR) with spacer ring. |
| <b>Singles</b> | 18R x 22.5 tyres (Radials).               |

## CAB

Excellent digging, loading and positioning visibility results from the careful design of front, side and roof lights. All screens are tinted to improve in cab conditions.

Fully opening front screen is very smooth to operate and as the lower screen is stored within the top screen frame it makes complete front screen opening easy, fast and convenient.

Fresh air ventilation available from opening door window, opening slot in front screen and fully opening front screen.

Parallelogram wash wiper for upper screen ensuring good wiped area for maximum visibility. Wiper motor is fitted in the left hand side of the roof screen so as not to affect bucket visibility when loading. Optional lower screen wiper available.

Fresh air ventilation and heater with windscreen demister. Infinitely variable blower speed, temperature and recirculation control.

Climate control. Fully adjustable deluxe suspension seat with arm rest adjustment and backrest recline. Radio with digital tuner fitted into the roof lining for maximum protection. Conveniently placed radio mute button incorporated into lower console. 12v power point and mobile phone holder built into the right hand console. Courtesy light can be operated from ground level and is illuminated for five minutes or until switched off improving operator access at night. Cab mounted roller blind protects operator from suns' glare through front or top screens.



### AMS – ADVANCED MANAGEMENT SYSTEM

Four selectable working modes link the operators control movements with the engine and hydraulic systems to maximise productivity and efficiency.

|                      |                                                                                                                                                                                                                                                                                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A (Auto)</b>      | Up to 100% engine power and 100% flow. Gives variable power and speed depending on the operator's input, matching the demand for output and efficiency to the job. Power boost is automatically activated in this mode should hard conditions be encountered. Auto idle cuts in after a period of inactivity (between 5 and 30 seconds as set by the operator) |
| <b>E (Economy)</b>   | 80% engine power. 95% of hydraulic flow maximises economy while maintaining excellent output.                                                                                                                                                                                                                                                                  |
| <b>P (Precision)</b> | 55% engine power. 90% of hydraulic flow for fine control of grading operations.                                                                                                                                                                                                                                                                                |
| <b>L (Lifting)</b>   | 55% engine power. 63% of hydraulic flow with permanent power boost for maximum lifting power and control.                                                                                                                                                                                                                                                      |

The Auto mode allows the AMS processor to select the optimum operational performance to match the demands of the job while the three alternative modes give precise matching of application when specific tasks are undertaken.

The adjustable position monitor mounted on the front right hand pillar of the cab gives the operator a constant read out of mode, tracking range, operating temperature and a host of other information, while retaining excellent visibility of the monitor and the job being carried out.

The required flow for hammer applications can be set and stored in the AMS memory and is automatically activated whenever the hammer pedal is depressed.

A maintenance indicator warns of imminent service needs, and all servicing and basic checks can be carried out using only the in cab display.

### STANDARD EXCAVATING BUCKETS

All buckets are JCB – Esco type fully welded steel, with sealed, hardened steel pivot pins and replaceable wear parts.

| Max Width mm (in.) | Capacity (SAE heaped) cu.m (cu.yd) | Weight kg (lb) |
|--------------------|------------------------------------|----------------|
| 600 (24)           | 0.40 (0.52)                        | 484 (1067)     |
| 900 (36)           | 0.71 (0.93)                        | 595 (1312)     |
| 1000 (40)          | 0.81 (1.06)                        | 627 (1382)     |
| 1200 (48)          | 1.03 (1.35)                        | 705 (1555)     |
| 1350 (53)          | 1.05 (1.37)                        | 679 (1497)     |
| 1450 (57)          | 1.14 (1.49)                        | 720 (1588)     |
| 1500 (59)          | 1.19 (1.56)                        | 734 (1618)     |

### SERVICE CAPACITIES

|                      | litres | UK gal |
|----------------------|--------|--------|
| Fuel tank            | 343    | 75     |
| Engine coolant       | 33.3   | 7.32   |
| Engine oil           | 24.5   | 5.4    |
| Swing reduction gear | 5.0    | 1      |
| Hydraulic system     | 200    | 44     |
| Hydraulic tank       | 226    | 49.7   |
| Transmission         | 3.0    | 0.70   |
| Axle hubs (each)     | 2.5    | 0.55   |








## STANDARD EQUIPMENT

Engine fan guard; Cold start pre-heat; Auto engine warm up; Double element air cleaner; Heavy-duty alternator; Electrics isolator; Heavy duty batteries; Cab & engine soundproofing; Cab heater & screen demister; Tinted glass; Interior light; Coat hook; Cigarette lighter; Ashtray; Operator's storage box; Removable floor mat; Windscreen wash/wipe; Plug-in power socket; Automatic power boost; Auto-idle; One-touch engine speed control; Hydraulic cushion control; Plexus hydraulic oil filtration; HSP pressure test points; Auxiliary pipework mounting brackets; Work lights – boom & mainframe mounted; Upper structure under covers; Swing system cover; External mirrors; Handrail & non slip walk ways; Quick connect engine oil drain pipe; Front screen blind; Quick connect fuel tank drain pipe; Hinged engine under cover.

## OPTIONAL EQUIPMENT


Hose burst check valves & overload warning system; Tipping link mounted lift points; General purpose buckets; Ditch/grading buckets; Quickhitch buckets; Hydraulic hammers; Auxiliary pipework (full and low flow); Climate control; Cab mounted & rear work lights; Rotating beacon; Rain guard; Biodegradeable oil; Air suspension seat with heated pad and lumbar support adjustment; Electric refuelling pump; Lower screen wiper; Radio; Cruise control; Grab stowage bar; FOPS (Level 2) operator protection; Biodegradeable oil; High and low temperature oils; Mesh front screen guard; Travel Alarm; Turbo II pre-cleaner.

## OPERATING WEIGHTS


| Chassis                                                                                                                  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br>MONO – 5T CWT                     | 20475kg<br>(45140lb)                                                                | 21283kg<br>(46921lb)                                                                | 21380kg<br>(47135lb)                                                                | 22647kg<br>(49928lb)                                                                | 23202kg<br>(51152lb)                                                                |
| <br>TAB – 4T CWT                      | 20546kg<br>(45296lb)                                                                | 21354kg<br>(47078lb)                                                                | 21909kg<br>(48301lb)                                                                | 22718kg<br>(50085lb)                                                                | 23273kg<br>(51308lb)                                                                |
| <br>TAB – 3.5T CWT<br>(TUV COUNTRIES) | 20046kg<br>(44194lb)                                                                | 20850kg<br>(45966lb)                                                                | 21409kg<br>(47199lb)                                                                | 22218kg<br>(48982lb)                                                                | 22773kg<br>(50206lb)                                                                |

Machine equipped with 2.4m (7-10) dipper excavating bucket and dual wheels. For single wheels subtract 400kg (880lb).

## WORKING RANGES

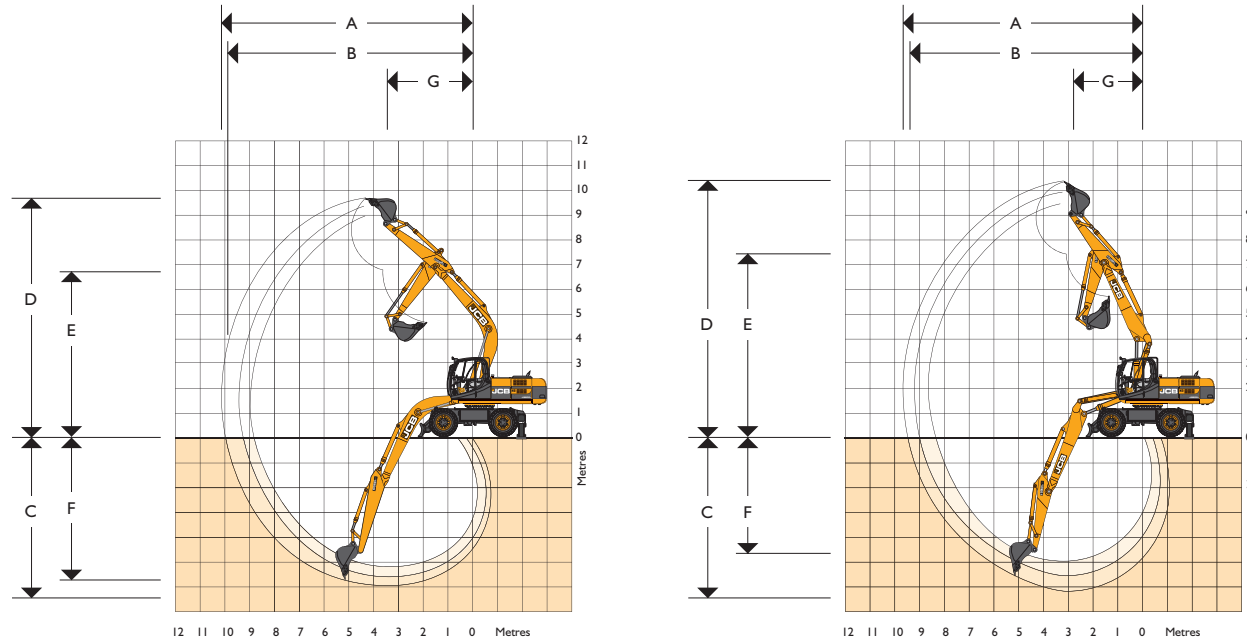

## WORKING RANGES

| Boom                                |                                          | <br>Boom length 5.7m (18-8) |               |               | <br>Boom length 5.63m (18-6) |               |               |
|-------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------|---------------|-------------------------------------------------------------------------------------------------------------------|---------------|---------------|
| Dipper arm                          |                                          | 1.91 m (6-3)                                                                                                    | 2.40m (7-10)  | 3.00m (9-10)  | 1.91 m (6-3)                                                                                                      | 2.40m (7-10)  | 3.00m (9-10)  |
| A                                   | Max digging reach mm (ft-in)             | 9110 (29-10)                                                                                                    | 9490 (31-1)   | 10020 (32-10) | 8860 (29-0)                                                                                                       | 9280 (30-5)   | 9825 (32-3)   |
| B                                   | Max digging reach (on ground) mm (ft-in) | 8870 (29-1)                                                                                                     | 9310 (30-6)   | 9850 (32-3)   | 8650 (28-4)                                                                                                       | 9140 (30-0)   | 9650 (31-8)   |
| C                                   | Max digging depth mm (ft-in)             | 5260 (17-3)                                                                                                     | 5790 (18-0)   | 6370 (20-10)  | 5470 (18-0)                                                                                                       | 5960 (19-6)   | 6475 (21-3)   |
| D                                   | Max digging height mm (ft-in)            | 9190 (30-2)                                                                                                     | 9430 (31-0)   | 9630 (31-7)   | 9530 (31-3)                                                                                                       | 9930 (32-6)   | 10160 (33-4)  |
| E                                   | Max loadover height mm (ft-in)           | 6470 (21-3)                                                                                                     | 6760 (22-2)   | 6980 (23-0)   | 6670 (21-10)                                                                                                      | 7060 (23-2)   | 7300 (24-0)   |
| F                                   | Max vertical wall cut depth mm (ft-in)   | 4540 (14-10)                                                                                                    | 5240 (17-2)   | 5840 (19-2)   | 3760 (12-4)                                                                                                       | 4200 (13-9)   | 4795 (15-9)   |
| G                                   | Min swing radius mm (ft-in)              | 3900 (12-9)                                                                                                     | 3860 (12-8)   | 3750 (12-4)   | 3250 (10-7)                                                                                                       | 3260 (10-8)   | 2905 (9-6)    |
| Bucket rotation                     |                                          | 183°                                                                                                            | 183°          | 183°          | 183°                                                                                                              | 183°          | 183°          |
| Dipper tearout kgf (lbf)            |                                          | 16340 (36025)                                                                                                   | 13100 (28880) | 10450 (23040) | 16340 (36025)                                                                                                     | 13100 (28880) | 10450 (23040) |
| Dipper tearout with boost kgf (lbf) |                                          | 17700 (39020)                                                                                                   | 14000 (30865) | 11270 (24845) | 17700 (39020)                                                                                                     | 14000 (30865) | 11270 (24845) |
| Bucket tearout kgf (lbf)            |                                          | 11770 (25950)                                                                                                   | 11770 (25950) | 11770 (25950) | 11770 (25950)                                                                                                     | 11770 (25950) | 11770 (25950) |
| Bucket tearout with boost kgf (lbf) |                                          | 12710 (28020)                                                                                                   | 12710 (28020) | 12710 (28020) | 12710 (28020)                                                                                                     | 12710 (28020) | 12710 (28020) |

## LIFT CAPACITIES – Dipper length: 1.9m, Monoboom 5.1m, No bucket, Front dozer, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |      |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg   | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |      |                 |      | 6860*                  | 6860* | 5308 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 6590*         | 6440 |                 |      | 6450*                  | 5540  | 6545 |
| 4.5m (14.9ft)     |                 |    |               |        | 8820*           | 8820* | 7120*         | 6240 |                 |      | 6340*                  | 4600  | 7262 |
| 3.0m (9.10ft)     |                 |    |               |        | 10910*          | 9090  | 7980*         | 5960 | 6780*           | 4280 | 6550*                  | 4180  | 7613 |
| 1.5m (4.11ft)     |                 |    |               |        | 12140*          | 8670  | 8710*         | 5720 | 7040*           | 4180 | 6930*                  | 4060  | 7650 |
| 0m                |                 |    |               |        | 12220*          | 8570  | 9000*         | 5610 |                 |      | 7160*                  | 4230  | 7378 |
| – 1.5m (– 4.11ft) |                 |    | 12270*        | 12270* | 11530*          | 8630  | 8630*         | 5620 |                 |      | 7380*                  | 4800  | 6758 |
| – 3.0m (– 9.10ft) |                 |    | 12920*        | 12920* | 9790*           | 8830  |               |      |                 |      | 7430*                  | 6290  | 5672 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |      |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, Monoboom 5.1m, No bucket, Front dozer, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |       |                 |      | 5300*                  | 5300* | 5940 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 6140*         | 6140* |                 |      | 4920*                  | 4920* | 7063 |
| 4.5m (14.9ft)     |                 |    |               |        | 8170*           | 8170* | 6770*         | 6400  | 6210*           | 4500 | 4850*                  | 4410  | 7731 |
| 3.0m (9.10ft)     |                 |    |               |        | 10310*          | 9370  | 7710*         | 6100  | 6560*           | 4380 | 4990*                  | 4050  | 8061 |
| 1.5m (4.11ft)     |                 |    |               |        | 11880*          | 8850  | 8560*         | 5840  | 6960*           | 4260 | 5350*                  | 3950  | 8096 |
| 0m                |                 |    |               |        | 12360*          | 8650  | 9020*         | 5680  | 7140*           | 4180 | 6040*                  | 4080  | 7839 |
| – 1.5m (– 4.11ft) |                 |    | 11640*        | 11640* | 11970*          | 8650  | 8900*         | 5650  |                 |      | 7050*                  | 4530  | 7260 |
| – 3.0m (– 9.10ft) |                 |    | 14560*        | 14560* | 10630*          | 8800  | 7770*         | 5770  |                 |      | 7230                   | 5640  | 6266 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, Monoboom 5.1m, No bucket, Front dozer, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |        | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|--------|---------------|--------|-----------------|-------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |        |               |        |                 |       |               |       |                 |       |                        |       |      |
| Load Point Ht.    | kg              | kg     | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg    | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |        |               |        |                 |       |               |       |                 |       | 3400*                  | 3400* | 6653 |
| 6.0m (19.8ft)     |                 |        |               |        |                 |       | 5390*         | 5390* | 3950*           | 3950* | 3200*                  | 3200* | 7669 |
| 4.5m (14.9ft)     |                 |        |               |        |                 |       | 6100*         | 6100* | 5620*           | 4480  | 3160*                  | 3160* | 8287 |
| 3.0m (9.10ft)     |                 |        |               |        | 9300*           | 9300* | 7100*         | 6100  | 6090*           | 4340  | 3260*                  | 3260* | 8594 |
| 1.5m (4.11ft)     |                 |        |               |        | 11180*          | 8890  | 8090*         | 5800  | 6590*           | 4180  | 3490*                  | 3390  | 8627 |
| 0m                |                 |        | 6370*         | 6370*  | 12090*          | 8570  | 8740*         | 5590  | 6930*           | 4070  | 3900*                  | 3480  | 8388 |
| – 1.5m (– 4.11ft) | 7170*           | 7170*  | 10860*        | 10860* | 12090*          | 8490  | 8880*         | 5510  | 6880*           | 4040  | 4660*                  | 3950  | 7850 |
| – 3.0m (– 9.10ft) | 11690*          | 11690* | 16000*        | 16000* | 11190*          | 8570  | 8270*         | 5560  |                 |       | 6220*                  | 4720  | 6944 |
| – 4.5m (– 14.9ft) |                 |        | 12460*        | 12460* | 8870*           | 8860  |               |       |                 |       | 6850*                  | 6820  | 5480 |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.



## LIFT CAPACITIES – Dipper length: 1.9m, Monoboom 5.1m, No bucket, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|--------|-----------------|------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |        |                 |      |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |      |               |      |                 |      | 6860*                  | 6100 | 5308 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |      | 6590*         | 4970 |                 |      | 6450*                  | 4270 | 6545 |
| 4.5m (14.9ft)     |                 |    |               |        | 8820*           | 7380 | 7120*         | 4780 |                 |      | 6240                   | 3520 | 7262 |
| 3.0m (9.10ft)     |                 |    |               |        | 10910*          | 6720 | 7980*         | 4510 | 5810            | 3250 | 5670                   | 3180 | 7613 |
| 1.5m (4.11ft)     |                 |    |               |        | 12140*          | 6330 | 8040          | 4290 | 5710            | 3160 | 5540                   | 3070 | 7650 |
| 0m                |                 |    |               |        | 12220*          | 6240 | 7910          | 4180 |                 |      | 5800                   | 3190 | 7378 |
| – 1.5m (– 4.11ft) |                 |    | 12270*        | 12270* | 11530*          | 6290 | 7920          | 4190 |                 |      | 6640                   | 3610 | 6758 |
| – 3.0m (– 9.10ft) |                 |    | 12920*        | 12690  | 9790*           | 6480 |               |      |                 |      | 7430*                  | 4720 | 5672 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |      |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 2.4m, Monoboom 5.1m, No bucket, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|--------|-----------------|------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |        |                 |      |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |      |               |      |                 |      | 5300*                  | 5220 | 5940 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |      | 6140*         | 5140 |                 |      | 4920*                  | 3890 | 7063 |
| 4.5m (14.9ft)     |                 |    |               |        | 8170*           | 7640 | 6770*         | 4930 | 6050            | 3470 | 4850*                  | 3290 | 7731 |
| 3.0m (9.10ft)     |                 |    |               |        | 10310*          | 6980 | 7710*         | 4650 | 5920            | 3360 | 4990*                  | 3000 | 8061 |
| 1.5m (4.11ft)     |                 |    |               |        | 11880*          | 6500 | 8170          | 4400 | 5790            | 3240 | 5160                   | 2900 | 8096 |
| 0m                |                 |    |               |        | 12360*          | 6320 | 7990          | 4260 | 5700            | 3160 | 5350                   | 2990 | 7839 |
| – 1.5m (– 4.11ft) |                 |    | 11640*        | 11640* | 11970*          | 6320 | 7950          | 4220 |                 |      | 5990                   | 3310 | 7260 |
| – 3.0m (– 9.10ft) |                 |    | 14560*        | 12560  | 10630*          | 6450 | 7770*         | 4340 |                 |      | 7230*                  | 4110 | 6266 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |      |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 3.0m, Monoboom 5.1m, No bucket, Rear stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |        | 3m (9ft 10in) |        | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|--------|---------------|--------|-----------------|------|---------------|------|-----------------|------|------------------------|-------|------|
|                   |                 |        |               |        |                 |      |               |      |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg     | kg            | kg     | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |        |               |        |                 |      |               |      |                 |      | 3400*                  | 3400* | 6653 |
| 6.0m (19.8ft)     |                 |        |               |        |                 |      | 5390*         | 5170 | 3950*           | 3520 | 3200*                  | 3200* | 7669 |
| 4.5m (14.9ft)     |                 |        |               |        |                 |      | 6100*         | 4950 | 5620*           | 3450 | 3160*                  | 2890  | 8287 |
| 3.0m (9.10ft)     |                 |        |               |        | 9300*           | 7100 | 7100*         | 4650 | 5890            | 3310 | 3260*                  | 2640  | 8594 |
| 1.5m (4.11ft)     |                 |        |               |        | 11180*          | 6530 | 8090*         | 4360 | 5720            | 3160 | 3490*                  | 2560  | 8627 |
| 0m                |                 |        | 6370*         | 6370*  | 12090*          | 6230 | 7910          | 4170 | 5600            | 3060 | 3900*                  | 2610  | 8388 |
| – 1.5m (– 4.11ft) | 7170*           | 7170*  | 10860*        | 10860* | 12090*          | 6160 | 7810          | 4090 | 5560            | 3020 | 4660*                  | 2850  | 7850 |
| – 3.0m (– 9.10ft) | 11690*          | 11690* | 16000*        | 12200  | 11190*          | 6240 | 7860          | 4130 |                 |      | 6220*                  | 3420  | 6944 |
| – 4.5m (– 14.9ft) |                 |        | 12460*        | 12460* | 8870*           | 6490 |               |      |                 |      | 6850*                  | 4930  | 5480 |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.9m, Monoboom 5.1m, No bucket, 4 stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |        | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|--------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |        |               |       |                 |      |                        |       | mm   |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg     | kg            | kg    | kg              | kg   | kg                     | kg    |      |
| 7.5m (24.6ft)     |                 |    |               |        |                 |        |               |       |                 |      | 6860*                  | 6860* | 5308 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |        | 6590*         | 6590* |                 |      | 6450*                  | 6450* | 6545 |
| 4.5m (14.9ft)     |                 |    |               |        | 8820*           | 8820*  | 7120*         | 7120* |                 |      | 6340*                  | 5690  | 7262 |
| 3.0m (9.10ft)     |                 |    |               |        | 10910*          | 10910* | 7980*         | 7460  | 6780*           | 5310 | 6550*                  | 5190  | 7613 |
| 1.5m (4.11ft)     |                 |    |               |        | 12140*          | 11260  | 8710*         | 7210  | 7040*           | 5210 | 6930*                  | 5060  | 7650 |
| 0m                |                 |    |               |        | 12220*          | 11140  | 9000*         | 7090  |                 |      | 7160*                  | 5290  | 7378 |
| – 1.5m (– 4.11ft) |                 |    | 12270*        | 12270* | 11530*          | 11200  | 8630*         | 7100  |                 |      | 7380*                  | 6010  | 6758 |
| – 3.0m (– 9.10ft) |                 |    | 12920*        | 12920* | 9790*           | 9790*  |               |       |                 |      | 7430*                  | 7430* | 5672 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |        |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, Monoboom 5.1m, No bucket, 4 stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |        | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|--------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |        |               |       |                 |      |                        |       | mm   |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg     | kg            | kg    | kg              | kg   | kg                     | kg    |      |
| 7.5m (24.6ft)     |                 |    |               |        |                 |        |               |       |                 |      | 5300*                  | 5300* | 5940 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |        | 6140*         | 6140* |                 |      | 4920*                  | 4920* | 7063 |
| 4.5m (14.9ft)     |                 |    |               |        | 8170*           | 8170*  | 6770*         | 6770* | 6210*           | 5540 | 4850*                  | 4850* | 7731 |
| 3.0m (9.10ft)     |                 |    |               |        | 10310*          | 10310* | 7710*         | 7610  | 6560*           | 5420 | 4990*                  | 4850  | 8061 |
| 1.5m (4.11ft)     |                 |    |               |        | 11880*          | 11450  | 8560*         | 7330  | 6960*           | 5290 | 5350*                  | 4730  | 8096 |
| 0m                |                 |    |               |        | 12360*          | 11230  | 9020*         | 7160  | 7140*           | 5210 | 6040*                  | 4910  | 7839 |
| – 1.5m (– 4.11ft) |                 |    | 11640*        | 11640* | 11970*          | 11220  | 8900*         | 7130  |                 |      | 7050*                  | 5460  | 7260 |
| – 3.0m (– 9.10ft) |                 |    | 14560*        | 14560* | 10630*          | 10630* | 7770*         | 7250  |                 |      | 7230*                  | 6830  | 6266 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |        |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, Monoboom 5.1m, No bucket, 4 stabilisers, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |        | 3m (9ft 10in) |        | 4.5m (14ft 9in) |        | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|--------|---------------|--------|-----------------|--------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |        |               |        |                 |        |               |       |                 |       |                        |       | mm   |
| Load Point Ht.    | kg              | kg     | kg            | kg     | kg              | kg     | kg            | kg    | kg              | kg    | kg                     | kg    |      |
| 7.5m (24.6ft)     |                 |        |               |        |                 |        |               |       |                 |       | 3400*                  | 3400* | 6653 |
| 6.0m (19.8ft)     |                 |        |               |        |                 |        | 5390*         | 5390* | 3950*           | 3950* | 3200*                  | 3200* | 7669 |
| 4.5m (14.9ft)     |                 |        |               |        |                 |        | 6100*         | 6100* | 5620*           | 5530* | 3160*                  | 3160* | 8287 |
| 3.0m (9.10ft)     |                 |        |               |        | 9300*           | 9300*  | 7100*         | 7100* | 6090*           | 5380  | 3260*                  | 3260* | 8594 |
| 1.5m (4.11ft)     |                 |        |               |        | 11180*          | 11180* | 8090*         | 7300  | 6590*           | 5220  | 3490*                  | 3490* | 8627 |
| 0m                |                 |        | 6370*         | 6370*  | 12090*          | 11150  | 8740*         | 7080  | 6930*           | 5100  | 3900*                  | 3900* | 8388 |
| – 1.5m (– 4.11ft) | 7170*           | 7170*  | 10860*        | 10860* | 12090*          | 11060  | 8880*         | 6990  | 6880*           | 5070  | 4660*                  | 4660* | 7850 |
| – 3.0m (– 9.10ft) | 11690*          | 11690* | 16000*        | 16000* | 11190*          | 11150  | 8270*         | 7040  |                 |       | 6220*                  | 5730  | 6944 |
| – 4.5m (– 14.9ft) |                 |        | 12460*        | 12460* | 8870*           | 8870*  |               |       |                 |       | 6850*                  | 6850* | 5480 |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.9m, Monoboom 5.1m, No bucket, Rear dozer, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |      | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|------|-----------------|------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |      |                 |      |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg   | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |      |                 |      |               |      |                 |      | 6860*                  | 4880 | 5308 |
| 6.0m (19.8ft)     |                 |    |               |      |                 |      | 6590*         | 3970 |                 |      | 6450*                  | 3390 | 6545 |
| 4.5m (14.9ft)     |                 |    |               |      | 8820*           | 5790 | 7120*         | 3790 |                 |      | 6340*                  | 2770 | 7262 |
| 3.0m (9.10ft)     |                 |    |               |      | 10910*          | 5170 | 7980*         | 3530 | 6780*           | 2540 | 6550*                  | 2480 | 7613 |
| 1.5m (4.11ft)     |                 |    |               |      | 12140*          | 4810 | 8710*         | 3320 | 7040*           | 2450 | 6930*                  | 2380 | 7650 |
| 0m                |                 |    |               |      | 12220*          | 4720 | 9000*         | 3210 |                 |      | 7160*                  | 2470 | 7378 |
| – 1.5m (– 4.11ft) |                 |    | 12270*        | 9080 | 11530*          | 4770 | 8630*         | 3220 |                 |      | 7380*                  | 2790 | 6758 |
| – 3.0m (– 9.10ft) |                 |    | 12920*        | 9280 | 9790*           | 4950 |               |      |                 |      | 7430*                  | 3650 | 5672 |
| – 4.5m (– 14.9ft) |                 |    |               |      |                 |      |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 2.4m, Monoboom 5.1m, No bucket, Rear dozer, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |      | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|------|-----------------|------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |      |                 |      |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg   | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |      |                 |      |               |      |                 |      | 5300*                  | 4210 | 5940 |
| 6.0m (19.8ft)     |                 |    |               |      |                 |      | 6140*         | 4140 |                 |      | 4920*                  | 3120 | 7063 |
| 4.5m (14.9ft)     |                 |    |               |      | 8170*           | 6060 | 6770*         | 3940 | 6210*           | 2760 | 4850*                  | 2610 | 7731 |
| 3.0m (9.10ft)     |                 |    |               |      | 10310*          | 5430 | 7710*         | 3680 | 6560*           | 2650 | 4990*                  | 2360 | 8061 |
| 1.5m (4.11ft)     |                 |    |               |      | 11880*          | 4990 | 8560*         | 3440 | 6960*           | 2540 | 5350*                  | 2270 | 8096 |
| 0m                |                 |    |               |      | 12360*          | 4820 | 9020*         | 3300 | 7140*           | 2470 | 6040*                  | 2330 | 7839 |
| – 1.5m (– 4.11ft) |                 |    | 11640*        | 8990 | 11970*          | 4810 | 8900*         | 3270 |                 |      | 7050*                  | 2580 | 7260 |
| – 3.0m (– 9.10ft) |                 |    | 14560*        | 9210 | 10630*          | 4940 | 7770*         | 3370 |                 |      | 7230*                  | 3210 | 6266 |
| – 4.5m (– 14.9ft) |                 |    |               |      |                 |      |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 3.0m, Monoboom 5.1m, No bucket, Rear dozer, 5 T Counterweight.

## JS200W MONO

| Reach             | 1.5m (4ft 11in) |        | 3m (9ft 10in) |       | 4.5m (14ft 9in) |      | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|--------|---------------|-------|-----------------|------|---------------|------|-----------------|------|------------------------|-------|------|
|                   |                 |        |               |       |                 |      |               |      |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg     | kg            | kg    | kg              | kg   | kg            | kg   | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |        |               |       |                 |      |               |      |                 |      | 3400*                  | 3400* | 6653 |
| 6.0m (19.8ft)     |                 |        |               |       |                 |      | 5390*         | 4160 | 3950*           | 2790 | 3200*                  | 2670  | 7669 |
| 4.5m (14.9ft)     |                 |        |               |       |                 |      | 6100*         | 3940 | 5620*           | 2720 | 3160*                  | 2260  | 8287 |
| 3.0m (9.10ft)     |                 |        |               |       | 9300*           | 5530 | 7100*         | 3650 | 6090*           | 2590 | 3260*                  | 2050  | 8594 |
| 1.5m (4.11ft)     |                 |        |               |       | 11180*          | 4980 | 8090*         | 3380 | 6590*           | 2450 | 3490*                  | 1970  | 8627 |
| 0m                |                 |        | 6370*         | 6370* | 12090*          | 4710 | 8740*         | 3200 | 6930*           | 2350 | 3900*                  | 2000  | 8388 |
| – 1.5m (– 4.11ft) | 7170*           | 7170*  | 10860*        | 8640  | 12090*          | 4640 | 8880*         | 3120 | 6880*           | 2320 | 4660*                  | 2190  | 7850 |
| – 3.0m (– 9.10ft) | 11690*          | 11690* | 16000*        | 8840  | 11190*          | 4710 | 8270*         | 3160 |                 |      | 6220*                  | 2630  | 6944 |
| – 4.5m (– 14.9ft) |                 |        | 12460*        | 9240  | 8870*           | 4950 |               |      |                 |      | 6850*                  | 3810  | 5480 |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|-------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg    | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |       |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4760* |                 |    | 4840*                  | 4840* | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4970* |                 |    | 4950*                  | 4480  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 7450* | 5660*         | 5470  |                 |    | 5160*                  | 3970  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 7900  | 6400*         | 5190  |                 |    | 5440*                  | 3800  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 7680  | 6920*         | 5030  |                 |    | 5800*                  | 3930  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 7680  | 6980*         | 5010  |                 |    | 6250*                  | 4460  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |       |                 |      | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 4270*         | 4270* |                 |      | 4500*                  | 4500* | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790*  | 5190*           | 5190* | 4640*         | 4640* |                 |      | 4630*                  | 4120  | 7426 |
| 3.0m (9.10ft)     |                 |    |               |        | 6920*           | 6920* | 5390*         | 5390* | 4840*           | 3960 | 4840*                  | 3700  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |        | 8560*           | 8120  | 6210*         | 5320  | 5220*           | 3830 | 5110*                  | 3560  | 7867 |
| 0m                |                 |    |               |        | 9480*           | 7790  | 6840*         | 5110  | 5530*           | 3740 | 5450*                  | 3650  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 12340* | 9700*           | 7720  | 7080*         | 5040  |                 |      | 5870*                  | 4050  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9140*           | 7850  |               |       |                 |      | 7260*                  | 5740  | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg    | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       | 3730*         | 3730* |                 |       | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 3560*         | 3560* |                 |       | 3270*                  | 3270* | 7325 |
| 4.5m (14.9ft)     |                 |    |               |        | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 3980* | 3170*                  | 3170* | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760*  | 6010*           | 6010* | 4810*         | 4810* | 4330*           | 3940  | 3210*                  | 3210* | 8352 |
| 1.5m (4.11ft)     |                 |    |               |        | 7800*           | 7800* | 5710*         | 5310  | 4800*           | 3780  | 3390*                  | 3140  | 8413 |
| 0m                |                 |    | 6900*         | 6900*  | 9020*           | 7760  | 6470*         | 5050  | 5220*           | 3640  | 3740*                  | 3200  | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 11470* | 9530*           | 7580  | 6890*         | 4920  | 5400*           | 3590  | 4390*                  | 3490  | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9330*           | 7630  | 6770*         | 4940  |                 |       | 5740*                  | 4210  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg   | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |      |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4450 |                 |    | 4840*                  | 4250  | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4330 |                 |    | 4950*                  | 3350  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 6170  | 5660*         | 4060 |                 |    | 5160*                  | 2940  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 5630  | 6400*         | 3800 |                 |    | 5320                   | 2790  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 5430  | 6920*         | 3640 |                 |    | 5540                   | 2870  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 5430  | 6890*         | 3620 |                 |    | 6250*                  | 3250  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       |               |       |                 |      | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 4270*         | 4270* |                 |      | 4500*                  | 3810  | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790* | 5190*           | 5190* | 4640*         | 4510  |                 |      | 4630*                  | 3100  | 7426 |
| 3.0m (9.10ft)     |                 |    |               |       | 6920*           | 6450  | 5390*         | 4210  | 4840*           | 2960 | 4840*                  | 2760  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |       | 8560*           | 5840  | 6210*         | 3920  | 5220*           | 2830 | 4920                   | 2630  | 7867 |
| 0m                |                 |    |               |       | 9480*           | 5540  | 6840*         | 3720  | 5210            | 2740 | 5080                   | 2680  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 10620 | 9700*           | 5470  | 7080          | 3660  |                 |      | 5680                   | 2970  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9140*           | 5580  |               |       |                 |      | 7260*                  | 4170  | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Rear stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       | 3730*         | 3730* |                 |      | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 3560*         | 3560* |                 |      | 3270*                  | 3240  | 7325 |
| 4.5m (14.9ft)     |                 |    |               |       | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 3070 | 3170*                  | 2690  | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760* | 6010*           | 6010* | 4810*         | 4230  | 4330*           | 2930 | 3210*                  | 2410  | 8352 |
| 1.5m (4.11ft)     |                 |    |               |       | 7800*           | 5920  | 5710*         | 3900  | 4800*           | 2770 | 3390*                  | 2290  | 8413 |
| 0m                |                 |    | 6900*         | 6900* | 9020*           | 5490  | 6470*         | 3650  | 5110            | 2640 | 3740*                  | 2320  | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 10340 | 9530*           | 5330  | 6890*         | 3530  | 5060            | 2600 | 4390*                  | 2520  | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9330*           | 5090  | 6770*         | 3560  |                 |      | 5740                   | 3050  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, 4 stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|-------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg    | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |       |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4760* |                 |    | 4840*                  | 4840* | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4970* |                 |    | 4950*                  | 4950* | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 7450* | 5660*         | 5660* |                 |    | 5160*                  | 5020  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 8920* | 6400*         | 6400* |                 |    | 5440*                  | 4830  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 9580* | 6920*         | 6470  |                 |    | 5800*                  | 5010  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 9540* | 6980*         | 6450  |                 |    | 6250*                  | 5710  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, 4 stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg    | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |       |                 |       | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 4270*         | 4270* |                 |       | 4500*                  | 4500* | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790*  | 5190*           | 5190* | 4640*         | 4640* |                 |       | 4630*                  | 4630* | 7426 |
| 3.0m (9.10ft)     |                 |    |               |        | 6920*           | 6920* | 5390*         | 5390* | 4840*           | 4840* | 4840*                  | 4660  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |        | 8560*           | 8560* | 6210*         | 6210* | 5220*           | 4840  | 5110*                  | 4500  | 7867 |
| 0m                |                 |    |               |        | 9480*           | 9480* | 6840*         | 6560  | 5530*           | 4740  | 5450*                  | 4630  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 12340* | 9700*           | 9700* | 7080*         | 6480  |                 |       | 5870*                  | 5150  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9140*           | 9140* |               |       |                 |       | 7260*                  | 7260* | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, 4 stabilisers, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg    | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       | 3730*         | 3730* |                 |       | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 3560*         | 3560* |                 |       | 3270*                  | 3270* | 7325 |
| 4.5m (14.9ft)     |                 |    |               |        | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 3980* | 3170*                  | 3170* | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760*  | 6010*           | 6010* | 4810*         | 4810* | 4330*           | 4330* | 3210*                  | 3210* | 8352 |
| 1.5m (4.11ft)     |                 |    |               |        | 7800*           | 7800* | 5710*         | 5710* | 4800*           | 4790  | 3390*                  | 3390* | 8413 |
| 0m                |                 |    | 6900*         | 6900*  | 9020*           | 9020* | 6470*         | 6470* | 5220*           | 4650  | 3740*                  | 3740* | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 11470* | 9530*           | 9530* | 6890*         | 6360  | 5400*           | 4600  | 4390*                  | 4390* | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9330*           | 9330* | 6770*         | 6380  |                 |       | 5740*                  | 5390  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Rear dozer, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg   | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |      |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 3490 |                 |    | 4840*                  | 3320  | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5350  | 4970*         | 3370 |                 |    | 4950*                  | 2580  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 4680  | 5660*         | 3110 |                 |    | 5160*                  | 2230  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 4170  | 6400*         | 2860 |                 |    | 5440*                  | 2090  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 3980  | 6920*         | 2710 |                 |    | 5800*                  | 2140  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 3980  | 6980*         | 2690 |                 |    | 6250*                  | 2430  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Rear dozer, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       |               |      |                 |      | 4500*                  | 4350 | 5430 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 4270*         | 3700 |                 |      | 4500*                  | 2990 | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790* | 5190*           | 5190* | 4640*         | 3540 |                 |      | 4630*                  | 2400 | 7426 |
| 3.0m (9.10ft)     |                 |    |               |       | 6920*           | 4940  | 5390*         | 3260 | 4840*           | 2270 | 4840*                  | 2100 | 7801 |
| 1.5m (4.11ft)     |                 |    |               |       | 8560*           | 4370  | 6210*         | 2980 | 5220*           | 2150 | 5110*                  | 1980 | 7867 |
| 0m                |                 |    |               |       | 9480*           | 4090  | 6840*         | 2790 | 5530*           | 2060 | 5450*                  | 2010 | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 7490  | 9700*           | 4020  | 7080*         | 2730 |                 |      | 5870*                  | 2230 | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9140*           | 4130  |               |      |                 |      | 7260*                  | 3120 | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Rear dozer, 4 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|-------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |       |                 |       |               |       |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       | 3760*         | 3740* |                 |      | 3570*                  | 3490 | 6205 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 3580*         | 3580* |                 |      | 3250*                  | 2540 | 7325 |
| 4.5m (14.9ft)     |                 |    |               |       | 4320*           | 4320* | 4050*         | 3600  | 4030*           | 2400 | 3150*                  | 2090 | 8003 |
| 3.0m (9.10ft)     |                 |    | 9880*         | 9330  | 6080*           | 5140  | 4870*         | 3310  | 4380*           | 2280 | 3190*                  | 1850 | 8352 |
| 1.5m (4.11ft)     |                 |    |               |       | 7900*           | 4520  | 5790*         | 3010  | 4860*           | 2130 | 3370*                  | 1740 | 8413 |
| 0m                |                 |    | 6880*         | 6880* | 9140*           | 4140  | 6550*         | 2790  | 5290*           | 2010 | 3730*                  | 1760 | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11440*        | 7430  | 9650*           | 4000  | 6980*         | 2680  | 5470*           | 1970 | 4380*                  | 1910 | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9450*           | 4030  | 6860*         | 2700  |                 |      | 5730*                  | 2320 | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |       |                 |      |                        |      |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|-------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg    | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |       |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4760* |                 |    | 4840*                  | 4840* | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4970* |                 |    | 4950*                  | 4220  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 7450* | 5660*         | 5160  |                 |    | 5160*                  | 3730  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 7440  | 6400*         | 4880  |                 |    | 5440*                  | 3570  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 7210  | 6920*         | 4720  |                 |    | 5800*                  | 3690  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 7210  | 6980*         | 4700  |                 |    | 6250*                  | 4190  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |       |                 |      | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 4270*         | 4270* |                 |      | 4500*                  | 4500* | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790*  | 5190*           | 5190* | 4640*         | 4640* |                 |      | 4630*                  | 3890  | 7426 |
| 3.0m (9.10ft)     |                 |    |               |        | 6920*           | 6920* | 5390*         | 5320  | 4840*           | 3730 | 4840*                  | 3480  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |        | 8560*           | 7660  | 6210*         | 5010  | 5220*           | 3600 | 5110*                  | 3340  | 7632 |
| 0m                |                 |    |               |        | 9480*           | 7330  | 6840*         | 4800  | 5530*           | 3510 | 5450*                  | 3420  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 12340* | 9700*           | 7250  | 7080*         | 4730  |                 |      | 5870*                  | 3800  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9140*           | 7380  |               |       |                 |      | 7260*                  | 5400  | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Front dozer, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       | 3730*         | 3730* |                 |      | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 3560*         | 3560* |                 |      | 3270*                  | 3270* | 7325 |
| 4.5m (14.9ft)     |                 |    |               |        | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 3850 | 3170*                  | 3170* | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760*  | 6010*           | 6010* | 4810*         | 4810* | 4330*           | 3710 | 3210*                  | 3070  | 8352 |
| 1.5m (4.11ft)     |                 |    |               |        | 7800*           | 7760  | 5710*         | 5000  | 4800*           | 3550 | 3390*                  | 2940  | 8413 |
| 0m                |                 |    | 6900*         | 6900*  | 9020*           | 7290  | 6470*         | 4740  | 5220*           | 3410 | 3740*                  | 2990  | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 11470* | 9530*           | 7120  | 6890*         | 4610  | 5400*           | 3360 | 4390*                  | 3260  | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9330*           | 7160  | 6770*         | 4630  |                 |      | 5740*                  | 3940  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.



## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg   | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |      |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4180 |                 |    | 4840*                  | 3990  | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4070 |                 |    | 4950*                  | 3120  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 5770  | 5660*         | 3790 |                 |    | 5160*                  | 2730  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 5240  | 6400*         | 3530 |                 |    | 5030                   | 2580  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 5030  | 6850          | 3370 |                 |    | 5230                   | 2650  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 5040  | 6830          | 3350 |                 |    | 6000                   | 3010  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       |               |       |                 |      | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 4270*         | 4270* |                 |      | 4500*                  | 3570  | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790* | 5190*           | 5190* | 4640*         | 4240  |                 |      | 4630*                  | 2890  | 7426 |
| 3.0m (9.10ft)     |                 |    |               |       | 6920*           | 6060  | 5390*         | 3940  | 4840*           | 2750 | 4820                   | 2560  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |       | 8560*           | 5440  | 6210*         | 3650  | 5020            | 2630 | 4650                   | 2430  | 7867 |
| 0m                |                 |    |               |       | 9480*           | 5140  | 6840*         | 3450  | 4920            | 2540 | 4790                   | 2480  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 9880  | 9700*           | 5070  | 6850          | 3390  |                 |      | 5370                   | 2750  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9140            | 5190  |               |       |                 |      | 7260*                  | 3870  | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Rear stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       | 3730*         | 3730* |                 |      | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 3560*         | 3560* |                 |      | 3270*                  | 3030  | 7325 |
| 4.5m (14.9ft)     |                 |    |               |       | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 2860 | 3170*                  | 2500  | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760* | 6010*           | 6010* | 4810*         | 3960  | 4330*           | 2730 | 3210*                  | 2230  | 8352 |
| 1.5m (4.11ft)     |                 |    |               |       | 7800*           | 5520  | 5710*         | 3630  | 4800*           | 2570 | 3390*                  | 2110  | 8413 |
| 0m                |                 |    | 6900*         | 6900* | 9020*           | 5100  | 6470          | 3390  | 4820            | 2440 | 3740*                  | 2130  | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 9600  | 9530*           | 4940  | 6720          | 3260  | 4770            | 2390 | 4390*                  | 2320  | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9330*           | 4980  | 6750          | 3290  |                 |      | 5640                   | 2820  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |       |                 |      |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, 4 stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|-------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg    | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |       |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 4760* |                 |    | 4840*                  | 4840* | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5720* | 4970*         | 4970* |                 |    | 4950*                  | 4950* | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 7450* | 5660*         | 5660* |                 |    | 5160*                  | 4750  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 8920* | 6400*         | 6300  |                 |    | 5440*                  | 4570  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 9580* | 6920*         | 6120  |                 |    | 5800*                  | 4740  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 9540* | 6980*         | 6100  |                 |    | 6250*                  | 5400  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |       |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, 4 stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |      | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg   | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       |               |       |                 |      | 4500*                  | 4500* | 5430 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 4270*         | 4270* |                 |      | 4500*                  | 4500* | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790*  | 5190*           | 5190* | 4640*         | 4640* |                 |      | 4630*                  | 4630* | 7426 |
| 3.0m (9.10ft)     |                 |    |               |        | 6920*           | 6920* | 5390*         | 5390* | 4840*           | 4720 | 4840*                  | 4410  | 7801 |
| 1.5m (4.11ft)     |                 |    |               |        | 8560*           | 8560* | 6210*         | 6210* | 5220*           | 4580 | 5110*                  | 4250  | 7867 |
| 0m                |                 |    |               |        | 9480*           | 9480* | 6840*         | 6210  | 5530*           | 4490 | 5450*                  | 4380  | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 12340* | 9700*           | 9660  | 7080*         | 6130  |                 |      | 5870*                  | 4870  | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9140*           | 9140* |               |       |                 |      | 7260                   | 7020  | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |      |                        |       |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, 4 stabilisers, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |        | 4.5m (14ft 9in) |       | 6m (19ft 8in) |       | 7.5m (24ft 7in) |       | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|--------|-----------------|-------|---------------|-------|-----------------|-------|------------------------|-------|------|
|                   |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg     | kg              | kg    | kg            | kg    | kg              | kg    | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |        |                 |       | 3730*         | 3730* |                 |       | 3590*                  | 3590* | 6205 |
| 6.0m (19.8ft)     |                 |    |               |        |                 |       | 3560*         | 3560* |                 |       | 3270*                  | 3270* | 7325 |
| 4.5m (14.9ft)     |                 |    |               |        | 4290*           | 4290* | 4010*         | 4010* | 3980*           | 3980* | 3170*                  | 3170* | 8003 |
| 3.0m (9.10ft)     |                 |    | 9760*         | 9760*  | 6010*           | 6010* | 4810*         | 4810* | 4330*           | 4330* | 3210*                  | 3210* | 8352 |
| 1.5m (4.11ft)     |                 |    |               |        | 7800*           | 7800* | 5710*         | 5710* | 4800*           | 4530  | 3390*                  | 3390* | 8413 |
| 0m                |                 |    | 6900*         | 6900*  | 9020*           | 9020* | 6470*         | 6150  | 5220*           | 4390  | 3740*                  | 3740* | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11470*        | 11470* | 9530*           | 9520  | 6890*         | 6010  | 5400*           | 4340  | 4390*                  | 4210  | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |        | 9330*           | 9330* | 6770*         | 6040  |                 |       | 5740*                  | 5090  | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |        |                 |       |               |       |                 |       |                        |       |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.

## LIFT CAPACITIES – Dipper length: 1.91m, TAB 5.35m, No bucket, Rear dozer, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |    | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |    | Capacity at Max. Reach |       |      |
|-------------------|-----------------|----|---------------|----|-----------------|-------|---------------|------|-----------------|----|------------------------|-------|------|
|                   |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| Load Point Ht.    | kg              | kg | kg            | kg | kg              | kg    | kg            | kg   | kg              | kg | kg                     | kg    | mm   |
| 7.5m (24.6ft)     |                 |    |               |    | 4770*           | 4770* |               |      |                 |    | 4930*                  | 4930* | 4730 |
| 6.0m (19.8ft)     |                 |    |               |    | 4650*           | 4650* | 4760*         | 3250 |                 |    | 4840*                  | 3090  | 6140 |
| 4.5m (14.9ft)     |                 |    |               |    | 5720*           | 5000  | 4970*         | 3130 |                 |    | 4950*                  | 2370  | 6940 |
| 3.0m (9.10ft)     |                 |    |               |    | 7450*           | 4330  | 5660*         | 2870 |                 |    | 5160*                  | 2040  | 7341 |
| 1.5m (4.11ft)     |                 |    |               |    | 8920*           | 3830  | 6400*         | 2620 |                 |    | 5440*                  | 1910  | 7412 |
| 0m                |                 |    |               |    | 9580*           | 3630  | 6920*         | 2470 |                 |    | 5800*                  | 1950  | 7161 |
| – 1.5m (– 4.11ft) |                 |    |               |    | 9540*           | 3640  | 6980*         | 2450 |                 |    | 6250*                  | 2210  | 6551 |
| – 3.0m (– 9.10ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |
| – 4.5m (– 14.9ft) |                 |    |               |    |                 |       |               |      |                 |    |                        |       |      |

## LIFT CAPACITIES – Dipper length: 2.4m, TAB 5.35m, No bucket, Rear dozer, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       |               |      |                 |      | 4500*                  | 4080 | 5430 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 4270*         | 3460 |                 |      | 4500*                  | 2770 | 6687 |
| 4.5m (14.9ft)     |                 |    | 6790*         | 6790* | 5190*           | 5190* | 4640*         | 3300 |                 |      | 4630*                  | 2210 | 7426 |
| 3.0m (9.10ft)     |                 |    |               |       | 6920*           | 4600  | 5390*         | 3020 | 4840*           | 2080 | 4840*                  | 1930 | 7801 |
| 1.5m (4.11ft)     |                 |    |               |       | 8560*           | 4020  | 6210*         | 2740 | 5220*           | 1960 | 5110*                  | 1810 | 7867 |
| 0m                |                 |    |               |       | 9480*           | 3740  | 6840*         | 2550 | 5530*           | 1880 | 5450*                  | 1830 | 7632 |
| – 1.5m (– 4.11ft) |                 |    | 12340*        | 6880  | 9700*           | 3680  | 7080*         | 2490 |                 |      | 5870*                  | 2030 | 7065 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9140*           | 3790  |               |      |                 |      | 7260*                  | 2850 | 5543 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |

## LIFT CAPACITIES – Dipper length: 3.0m, TAB 5.35m, No bucket, Rear dozer, 3.5 T Counterweight.

## JS200W TAB

| Reach             | 1.5m (4ft 11in) |    | 3m (9ft 10in) |       | 4.5m (14ft 9in) |       | 6m (19ft 8in) |      | 7.5m (24ft 7in) |      | Capacity at Max. Reach |      |      |
|-------------------|-----------------|----|---------------|-------|-----------------|-------|---------------|------|-----------------|------|------------------------|------|------|
|                   |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |
| Load Point Ht.    | kg              | kg | kg            | kg    | kg              | kg    | kg            | kg   | kg              | kg   | kg                     | kg   | mm   |
| 7.5m (24.6ft)     |                 |    |               |       |                 |       | 3760*         | 3500 |                 |      | 3570*                  | 3260 | 6205 |
| 6.0m (19.8ft)     |                 |    |               |       |                 |       | 3580*         | 3530 |                 |      | 3250*                  | 3250 | 7325 |
| 4.5m (14.9ft)     |                 |    |               |       | 4320*           | 4320* | 4050*         | 3350 | 4030*           | 2210 | 3150*                  | 1910 | 8003 |
| 3.0m (9.10ft)     |                 |    | 9880*         | 8710  | 6080*           | 4790  | 4870*         | 3070 | 4380*           | 2090 | 3190*                  | 1580 | 8352 |
| 1.5m (4.11ft)     |                 |    |               |       | 7900*           | 4170  | 5790*         | 2770 | 4860*           | 1950 | 3370*                  | 1580 | 8413 |
| 0m                |                 |    | 6880*         | 6820* | 9140*           | 3800  | 6550*         | 2550 | 5290*           | 1830 | 3730*                  | 1590 | 8194 |
| – 1.5m (– 4.11ft) |                 |    | 11440*        | 6810  | 9650*           | 3650  | 6980*         | 2430 | 5470*           | 1780 | 4380*                  | 1730 | 7670 |
| – 3.0m (– 9.10ft) |                 |    |               |       | 9450*           | 3690  | 6860*         | 2450 |                 |      | 5730*                  | 2110 | 6767 |
| – 4.5m (– 14.9ft) |                 |    |               |       |                 |       |               |      |                 |      |                        |      |      |



Lift capacity front and rear.



Lift capacity full circle.

## Notes:

- For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
- Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.
- Lift capacities assume that the machine is on firm, level ground.
- Lift capacities may be limited by local regulations. Please refer to your dealer.



## A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into Britain's largest privately owned manufacturer of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders, tractors and compaction equipment.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in the world.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with a global sales and service network of more than 650 dealers and agents, we aim to deliver the best customer support in the industry.

Through setting the standards by which others are judged, JCB has become one of the world's most impressive success stories.

