

KAWASAKI



95zII



95ZII

SUMMARY OF FEATURES

- The popular, fuel-efficient Cummins NTA855 turbocharged diesel supplies a big 310 HP.
- Reliable Delco Remy electrical components make support simple.
- Common SAE hydraulic hose fittings allow hoses to be replaced easily.
- Z-linkage provides high breakout force for easy digging.
- Low cost caliper disc brakes are fade-resistant, self-adjusting, self-cleaning and easy to change.
- Large optional 29.5 x 25 bias or radial tires offer excellent flotation and high load capability.
- Dual bucket cylinders are mounted wide on the torque tube to spread stress and give superior visibility.
- Superior quality in structural areas such as liftarms, frames and center pins provide excellent durability.
- Precision-made hydraulic components allow clean, dry operation longer.
- Operator features include: fingertip controls, semi-automatic transmission, isolated and sound-suppressed cab, suspension seat, tilt wheel, bucket lever and boom kickout.
- Service features include: sealed linkage pins, cluster-mounted grease fittings, tire inflator, special tools, hinged hoodsides, spin-on engine oil and fuel filters, aspirated Donaldson air cleaner, brake pad wear sensor.
- Safety features include: separate brake systems front and rear, emergency brake, warning buzzers and lights to monitor all systems, neutral start and optional emergency steering.



CUMMINS ENGINE



The highly reliable Cummins NTA855 Big Cam III turbocharged diesel supplies 310 flywheel horsepower. Fuel efficiency is excellent and the turbocharger allows the engine to maintain full power up to 10,000 ft. altitude and high ambient temperatures. The dual element Donaldson air cleaner is equipped with an exhaust aspirator to extend element life. The fuel and oil filters are spin-on type. The ether starting system aids cold-weather starts. Delco Remy electrical components simplify support.

OPERATOR COMFORT FEATURES

The quiet, roomy ROPS cab offers a comfortable work place to maximize productivity by reducing operator fatigue. The suspension seat is adjustable six ways and the tilt wheel allows the operator to fit the machine to his liking. The compartment is isolation-mounted to reduce vibration and noise. Visibility is excellent in all directions. The cab is equipped with front and rear wipers, front washer, lights, tinted glass, sliding side windows and circulation fan.




SOFT-SHIFT TRANSMISSION

The big planetary powershift transmission has a soft-shift feature to reduce shift shock and increase operator comfort. For quicker cycles and less operator fatigue, shifts from first to second and third to fourth are automatic. Universal joints on all drivelines are a standard SAE size.

SEALED DUAL Z-LINKAGE

The Kawasaki 95ZII utilizes a dual Z-linkage that incorporates sealed pins to retain lubricant and restrict dirt entry. The two-cylinder design spreads loads evenly over the cast torque tube for added durability.

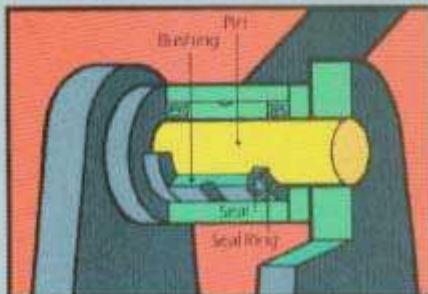


Also, the excellent bucket rollback angle permits carrying the maximum load without spillage.



SMOOTH, EASY STEERING AND FINGERTIP CONTROLS

The demand hydraulic system utilizes three highly-reliable cast iron gear pumps. The demand pump supplements the steering pump at low engine RPM and the main pump at higher RPM. This gives easy steering at all engine speeds and maximum digging speeds.

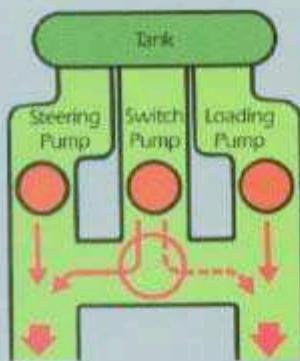

The dual, servo-assisted control levers offer superior modulation and fingertip control. The boom kickout and bucket leveler help to speed cycle time.



PRESSURIZED HYDRAULICS

The hydraulic tank is pressurized to keep the oil cleaner longer. The large hydraulic capacity and low system pressure reduces heat. With lower heat and cleaner oil the 95ZII hydraulic system stays dry longer. Several of the SAE hoses are used in multiple locations to simplify support.



SIMPLE, EFFECTIVE CALIPER DISC BRAKES

The four wheel caliper disc brakes are the lowest operating-cost brake for most applications. These simple brakes are fade-resistant, self-cleaning, and self-




adjusting. The brake pads have electronic sensors to monitor wear. Easy to service in the field, the new pads can be installed quickly. The front and rear axles have separate systems for added safety. The emergency brake automatically applies in case of pressure loss.



SERVICEABILITY FEATURES

Large hinged hoodsides provide easy access to the engine compartment. Grease fittings are cluster-mounted to assure efficient maintenance. A tire inflator is standard.

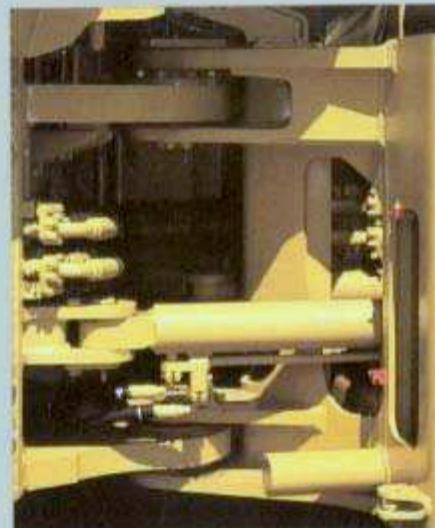



KAWASAKI'S PDQ SYSTEM

Kawasaki understands the need for timely delivery of parts to any of its users. To provide an unsurpassed level of service in this area, Kawasaki maintains an extremely high level of parts availability and fast response from our parts distribution network and dealers.



KAWASAKI HISTORY

The dependable Kawasaki loader is manufactured by Kawasaki Heavy Industries. Kawasaki is a large industrial manufacturer of ships, aircraft, locomotives, robots, plants, hydraulic components, and motorcycles, as well as a variety of construction equipment. The first Kawasaki articulated loader was manufactured in 1962, making Kawasaki a true pioneer in the loader market. The Kawasaki loaders are sold in over 100 countries. Kawasaki is one of the largest loader manufacturers in the world.



OPERATING SPECIFICATIONS

95ZII

ENGINE

| | |
|-------------------------------|---|
| Make/Model/Fuel type: | CUMMINS/NTA-855-C335/Diesel |
| Type | 4 cycle, watercooled, turbocharged, & aftercooled, direct injection |
| Number of cylinders | 6 |
| Bore and stroke | 5.5" x 6" (140 mm x 152 mm) |
| Total displacement | 885 in. ³ (14,010 cm ³) |
| Horsepower rating at flywheel | 310HP/2,100 rpm |
| Alternator (Delco) | AC 24V-1,800W (75 AMP) |
| Starting motor | 24V-7.5kW (10.1 HP) |
| Battery | 12V-200Ah, 2 units |
| Governor | All speed, mechanical type |

BRAKE SYSTEM

| | |
|-----------------|---|
| Service brakes | 4 wheel hydraulic, air actuated disc brake of completely independent systems for front and rear wheels. Two brake pedals: Right pedal brakes only. Left pedal brakes while neutralizing transmission. |
| Parking brake | Spring applied air released type, located on front drive shaft. |
| Emergency brake | Same as parking, applied on failure in air or hydraulic oil line. |

TORQUE CONVERTER AND TRANSMISSION SPECIFICATIONS

| | |
|---------------------|---|
| Torque converter | Four elements, single stage, 2-phase |
| Torque stall ratio | 5.21 : 1 |
| Main clutch | Wet hydraulic, multi-disc type |
| Cooling method | Forced circulation type |
| Transmission | Power shift, 4-speed forward, automatic shift 1-2 and 3-4, 2 speed reverse, automatic shift |
| Max speeds forward | 1st, 2nd: 7.5MPH (9.3km/hr) 3rd, 4th: 21.4MPH (34.5km/hr) |
| Max speeds reverse | 1st, 2nd: 12.0MPH (15.0km/hr) |
| Max tractive effort | 50,700lbs (23,000kg) |

HYDRAULIC AND STEERING SYSTEM

| | |
|------------------------------|---|
| Type | Articulated frame steering |
| Hydraulic mechanism | Hydraulic power steering unit, mechanical follow-up |
| Lift (boom) cylinder | Two (2) double-acting piston type: 7.48"dia x 38.54" (190mmdia x 979mm) |
| Tilt (bucket) cylinder | Two (2) double-acting piston type: 6.3"dia x 24.49" (160mmdia x 622mm) |
| Steering cylinder | Two (2) double-acting: 3.9"dia x 18.1" (100mmdia x 460mm) |
| Steering oil pump | Gear type: 30.4GPM/2,275psi @ 1,800rpm (115LPM/160kg/cm ² @ 1,800rpm) |
| Main oil pump | Gear type: 44.1GPM/2,490psi @ 1,800rpm (167LPM/175kg/cm ² @ 1,800rpm) |
| Demand (switch) pump | Gear type: 52.8GPM/2,490psi @ 1,800rpm (200LPM/175kg/cm ² @ 1,800rpm) |
| Control valve | Multiple control valve (set pressure = 2,490 psi / 175kg/cm ²) |
| Steering relief set pressure | 2,275psi (160kg/cm ²) |
| HYDRAULIC CYCLE TIME: * | |
| Lifting time (at full load) | 6.7 sec. |
| Lowering time (empty) | 4.1 sec. |
| Bucket dumping time | 1.3 sec. |
| TOTAL | 12.1 sec. |

*Measured in accordance with SAE J732C.

SERVICE REFILL CAPACITY

| LOCATION | CLASSIFICATION | CAPACITY-Gal (Lit) |
|-----------------------------------|----------------|--------------------|
| Engine | Cooling water | 22.5 (85) |
| Fuel tank | Diesel fuel | 113.6 (430) |
| Engine (oil pan) | Engine oil | 11.4 (43) |
| Front axle | Gear oil | 19.0 (72) |
| Rear axle | Gear oil | 19.0 (72) |
| Gear box | Gear oil | 1/3 (1.5) |
| Torque converter and transmission | Engine oil | 15.9 (60) |
| Hydraulic system (including tank) | Hydraulic oil | 95.1 (360) |
| Brake oil tank | Brake fluid | 1.1 (4) |

AXLE SYSTEM

| | |
|---------------------------------|---|
| Drive system | 4-wheel drive |
| Front and rear axle | Full floating banjo type |
| Tires | Standard: 26.5-25-24PR (L3) Optional: 26.5-25-24PR (L4, L5) 29.5-25-22PR (L3, L4) |
| Reduction and differential gear | Torque proportioning type for improved traction: Spiral bevel gear, 1 stage reduction |
| Final reduction gear | Internal planetary gear (4.313:1) |
| Oscillation angle | ± 11° (total: 22°) |

OPERATING SPECIFICATIONS / BUCKET DATA

95zII

| | | General Purpose | | Rock Purpose | | | |
|--|----------------------------|--|---------------------------------|------------------------------------|---------------------------------|--------------------------------------|------------------------------|
| | | Straight Edge With Bolt on Cutting Edge GSN962 | Straight Edge With Teeth GST962 | Straight Edge Without Teeth RSN962 | Straight Edge With Teeth RST962 | Spade Nose Edge Without Teeth RVN962 | Spade Nose With Teeth RVT962 |
| Capacity | Heaped | yd ³ (m ³) | 6.25 (4.75) | 6.0 (4.5) | 5.5 (4.2) | 5.5 (4.2) | 5.5 (4.2) |
| | Struck | yd ³ (m ³) | 5.5 (4.25) | 5.2 (4.0) | 4.7 (3.6) | 4.7 (3.6) | 4.7 (3.6) |
| Recommended Material Density | | lb/yd ³ (kg/m ³) | 3,000 (1,780) | 3,000 (1,780) | 3,200 (1,900) | 3,200 (1,900) | 3,200 (1,900) |
| Maximum Dumping Clearance | | ft-in (mm) | 10' 5 1/2" (3,065) | 9' 7 1/2" (2,930) | 10' 3 1/2" (3,140) | 9' 7" (2,920) | 9' 9 1/2" (2,980) |
| Dumping Reach (to front of bucket edge or teeth) | | ft-in (mm) | 4' 10 1/4" (1,480) | 5' 1/4" (1,530) | 4' 7 1/2" (1,405) | 5' 1/4" (1,540) | 5' 11 1/2" (1,565) |
| Digging Depth | | ft-in (mm) | 4 3/4" (120) | 6" (155) | 3 1/2" (90) | 6" (155) | 3 1/2" (90) |
| Breakout Force | | lb (kg) | 50,550 (22,930) | 54,300 (24,630) | 55,000 (24,940) | 55,000 (24,940) | 46,900 (21,300) |
| Bucket tilt-back angle | (at ground level) degree | | 47° | 47° | 47° | 47° | 47° |
| | (at carry position) degree | | 47° | 47° | 47° | 47° | 47° |
| Overall | Length | ft-in (mm) | 28' 3" (8,610) | 28' 10 1/2" (8,805) | 27' 10 1/2" (8,495) | 28' 10 1/2" (8,800) | 28' 7 1/2" (8,720) |
| | Height | ft-in (mm) | 12' 7 1/2" (3,850) | 12' 7 1/2" (3,850) | 12' 7 1/2" (3,850) | 12' 7 1/2" (3,850) | 12' 7 1/2" (3,850) |
| | Width (Outside Tire) | ft-in (mm) | 10' 2 1/2" (3,110) | 10' 2 1/2" (3,110) | 10' 2 1/2" (3,110) | 10' 2 1/2" (3,110) | 10' 2 1/2" (3,110) |
| | Width (Outside Bucket) | ft-in (mm) | 11' 3 1/2" (3,450) | 11' 3 1/2" (3,450) | 11' 3 1/2" (3,450) | 11' 3 1/2" (3,450) | 11' 3 1/2" (3,450) |
| Wheel Base | | ft-in (mm) | 11' 6 1/2" (3,520) | 11' 6 1/2" (3,520) | 11' 6 1/2" (3,520) | 11' 6 1/2" (3,520) | 11' 6 1/2" (3,520) |
| Min. Turning Radius | at outside bucket | ft-in (mm) | 25' 4 1/2" (7,725) | 25' 4 1/2" (7,725) | 25' 3 1/2" (7,710) | 25' 3 1/2" (7,710) | 25' 3 1/2" (7,705) |
| | at center of outside tire | ft-in (mm) | 21' 9 1/2" (6,650) | 21' 9 1/2" (6,650) | 21' 9 1/2" (6,650) | 21' 9 1/2" (6,650) | 21' 9 1/2" (6,650) |
| Min. Ground Clearance | | ft. in (mm) | 1' 5 1/4" (450) | 1' 5 1/4" (450) | 1' 5 1/4" (450) | 1' 5 1/4" (450) | 1' 5 1/4" (450) |
| Full Articulation Angle | | degree | 36° | 36° | 36° | 36° | 36° |
| Operating Weight (with ROPS Cab) | | lb (kg) | 61,840 (28,050) | 61,810 (28,030) | 62,250 (28,230) | 62,690 (28,430) | 62,470 (28,330) |
| Static Tipping Load (with ROPS Cab) | Straight | lb (kg) | 40,120 (18,200) | 40,510 (18,370) | 40,060 (18,170) | 39,620 (17,970) | 39,840 (18,070) |
| | Full Turn | lb (kg) | 36,270 (16,450) | 36,630 (16,610) | 36,400 (16,510) | 35,740 (16,210) | 36,180 (16,410) |

The Weight and Load figure include Enclosed ROPS Cab, 26.5-25-24PR (L-3) Tires, full fuel tank and operator. Measured in accordance with SAE J732C and J742C.

Courtesy of Machine.Market

WEIGHTS AND DIMENSIONS (SUPPLEMENTAL DATA)

| | Operating Weight | Tipping Load | | Overall Width (Outside Tire) | Tread | Change in Vertical Dimension | Overall Length | |
|-----------------------------------|------------------|-----------------|-----------------|------------------------------|---------|------------------------------|----------------|---------------|
| | | Straight | Full Turn | | | | | |
| ROPS Canopy (Instead of ROPS Cab) | lb (kg) | -770 (-350) | -620 (-280) | -620 (-280) | | | | |
| Remove ROPS Canopy and Cab | lb (kg) | -2,980 (-1,350) | -2,650 (-1,200) | -2,540 (-1,150) | in (cm) | | -3½" (-90) | |
| Counter Weight | lb (kg) | + 660 (+ 300) | + 1,455 (+ 660) | + 1,260 (+ 570) | in (mm) | | 2" (+ 50) | |
| Tires: 26.5-25-24PR(L-4)* | lb (kg) | + 800 (+ 400) | + 640 (+ 290) | + 570 (+ 260) | in (mm) | | 1 ¼" (+ 30) | |
| 26.5-25-24PR(L-5)* | lb (kg) | + 2,180 (+ 990) | + 1,565 (+ 710) | + 1,410 (+ 640) | in (mm) | | 1 ½" (+ 30) | |
| 29.5-25-22PR(L-3)* | lb (kg) | + 925 (+ 420) | + 660 (+ 300) | + 595 (+ 270) | in (mm) | + 7½" (+ 190) | + 4¾" (+ 120) | + 1 ¾" (+ 40) |
| Air Conditioner | lb (kg) | + 220 (+ 100) | + 240 (+ 110) | + 220 (+ 100) | | | | |
| Belly Guard (Rear Frame) | lb (kg) | + 265 (+ 120) | + 375 (+ 170) | + 330 (+ 150) | | | | |

*CaCl₂ in 26.5-25-24 PR weighs 3,170 lbs; CaCl₂ in 29.5-25-24 PR weighs 4,185 lbs.

Tread 7' 11" (2,420mm)
 Width (Outside Tire) 10' 2½" (3,110mm)
 Width (Outside Bucket) 11' 3¾" (3,450mm)
 Equipped with GSN bucket with bolt-on cutting edge, 26.5-25-24 PR (L-3) TIRE and ROPS Cab.



STANDARD EQUIPMENT

| | | | |
|---|--|---|--|
| Adjustable steering column Air cleaner (Donaldson type with strata precleaner) Air compressor Alternator-24V-75-amp Backup alarm Batteries (2) 12V-200Ah Brakes (dual system-air over hydraulic, disc) Bucket positioner Cold start ether system Emergency brake Engine side panel Fenders - (two [2] front, two [2] rear) | Filtration system (replacable elements) Frame lock Fuel gauge guard Gauges: air pressure, engine water temperature, torque converter oil temperature, hour meter, fuel level indicator, hydraulic oil level indicator Horn (electric) Hydraulic servo-assisted control valve Hydraulic power steering (with demand valve) | Indicator lights: working light, high beam Ladder (access at both sides) Lights: (two [2] headlights, two [2] stop & tail lights, two [2] rear lights Muffler Neutral starter Parking brake ROPS canopy Seatbelt Seat (adjustable suspension type) Special tool kit Switches: cold start, lights - front & rear, pilot light check, starter | Tires - four (4) 26.5-25-24PR (L-3) Tire inflation kit Torque proportional differential Vandalism protection Warning buzzers: air pressure, engine oil pressure, brake fluid, parking brake with transmission engaged Warning lights: engine water temperature, torque converter oil temperature, engine oil pressure, air pressure, brake fluid, air filter clogging, parking brake, battery discharge |
|---|--|---|--|

OPTIONAL EQUIPMENT

| | | | |
|---|---|---|---|
| Air conditioner, floor-mounted Air dryer Belly guard Bolt-on counterweight Bolt-on cutting edge | Bolt-on wear plate Buckets (see bucket data) Emergency steering Cooler: 18,300 BTU/Hr Heater: 24,200 BTU/Hr rated | Hydraulic system, three-spool valve, control lever, linkage and lines Soft cab: enclosed, with sound suppression, front and rear | Windshield wipers, front working lights, defroster fan Rear working lights Tires (sets of four): 26.5-25-24PR (L-4) (L-5), 29.5-25-22PR (L-3) |
|---|---|---|---|

KAWASAKI

95zII



Kawasaki
KAWASAKI CONSTRUCTION MACHINERY
CORP. OF AMERICA

2140 Barrett Park Drive • Suite 101

P.O. Box 1657

Kennesaw, Georgia 30144

Tel: 770-499-7000

Fax: 770-421-6842

www.kawasakiloaders.com