



High Flow Hydraulics

Having high flow increases the hydraulic muscle for attachments that need more hydraulic horsepower. With this option auxiliary hydraulic flow increases from 17.4 gpm to 29.3 gpm. The coupler manifold includes both 1/2" and 3/4" couplers.




Multi-Function Levers

The multi-function levers provide fingertip control of all major vehicle and attachment operations, letting you keep both hands on the levers at all times for optimal operating efficiency.




Best-in-class Engine Horsepower

Kubota's high-powered engines provide 74.3 HP (SAE J1995) for performance that surpasses the competition.

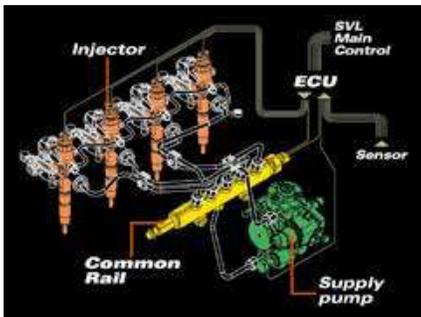

New CRS Diesel Engine

The SVL75-2 features Kubota's renowned CRS (Common Rail System) diesel engines which deliver a powerful 74.3 HP (SAE J1995). The CRS electronically controls the fuel injection timing and amount for high torque at a low rpm to improve work efficiency.

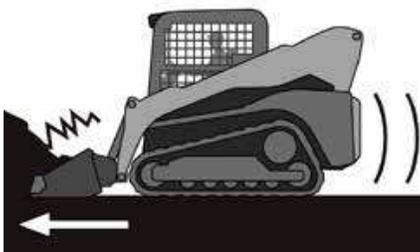

Electronic Travel Torque Management

Electronic Travel Torque Management System lets you work faster with more power. The ECU constantly monitors the load of the machine to optimally control hydraulic pump output according to the load, preventing engine stalls for smoother operation even under severe conditions.



Diesel Particulate Filter (DPF)

The Diesel Particulate Filter meets Tier 4 final diesel emissions regulation by collecting particulate matter (PM) from exhaust gas for cleaner exhaust emissions.



Long Reach for Maximum Lifting and Dumping, High Bucket Hinge Pin Height

Kubota's unique vertical lift is designed to deliver an exceptionally long reach of 41.7 inches. In addition, the tip of the arm is optimally shaped for a tall hinge pin height of 119.1 inches for easy dumping into trucks.



Standard Self-leveling Function

This feature helps keep the bucket or pallet forks in a horizontal position without the need to manually adjust the angle during lifting.



Standard Two-speed Travel

Shift from low gear at 4.7 mph to high gear at 7.1 mph to get the job done faster.



Pilot Valve with Shuttle Piston

This ensures consistent oil flow which improves directional stability.



Higher Ground Clearance

A high ground clearance of 11.7 inches lets you travel over large obstacles with ease.



Strong Traction Force

Kubota's original track lug design gives you more grip and a stronger traction force of 9678 lbs.



Wider Cab Entrance

A wider entrance makes it easier to get in and out.

Wide and Clean View

The spacious interior minimizes fatigue even during long work hours.

High-back Full Suspension Seat

The standard suspension seat offers outstanding comfort. (Air Suspension seat is optional)

Arm Rest

The spacious cab also includes ergonomically placed arm rests on the right and left sides of the seat to minimize operator fatigue.

Wide Leg Room

The cab provides ample leg room to reduce operator fatigue.



Easy-clean Floor Mat and Drain Outlet

The soft rubber floor mat is easy to remove and clean. And with the built-in drain outlet, the mat can be washed in the cab.



Hand and Foot Throttle

The hand and foot throttle allows you to match the engine speed to the task. The hand throttle is ideal for jobs requiring constant engine speed such as cold planing, trenching or snow blowing. The foot throttle lets the operator vary engine speed for other applications.



Pressurized Cab (Optional)

The cab is pressurized to keep dust, flying debris, and insects away to enhance comfort on the job. Furthermore, noise is kept down to let you work for long hours with minimal fatigue.



Optimized Air Conditioning

The climate control system offers outstanding cooling and heating performance with optimized airflow for a high level of comfort all year round.



Enhanced Defrosting and Demisting Functions

Ample airflow prevents the windows from fogging up or freezing during the cold months of the year.



Easy-open Sliding Windows

The sliding front door and double-sliding side windows can be opened regardless of the position of the front attachment, allowing you to get in or out safely even during emergencies.



Tilt-up Cab

The cab can be tilted 72° without having to lift the arm, allowing easy access to the hydraulic pumps, valves, lines and hydraulic tank.



Routine Checks

Simply open the rear bonnet to access all components for daily routine inspections.




Slide-and-tilt Radiator and Oil Cooler

The radiator can be tilted for easy cleaning.



Large Space for Tool Box

The SVL75-2 offers a convenient and large tool box for storing a grease gun and other necessities.

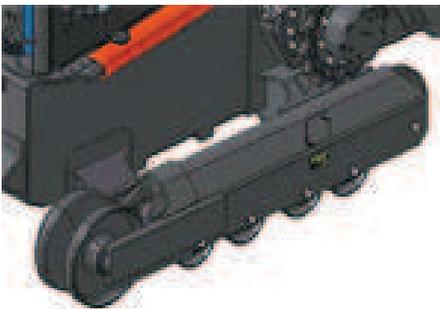

Welded, Integrated Mainframe and Undercarriage

The undercarriage forms an integral part of the main frame for maximum durability.



Kubota Original Rubber HighGrip Tracks

Kubota's original rubber tracks offer outstanding durability and long-life performance. Furthermore, Kubota's original lug pattern prevents soil from accumulating and improves traction force. 15" (380 mm) wide tracks are also optional.



Triple Flange Lower Track Rollers

A highly reliable triple flange design not only minimizes the risk of detracking, but improves stability as well.