

MUSTANG

2044



MID-SIZED, HIGH PERFORMANCE



MOVE MORE ▲ with an operating capacity of 1,550 lbs. with optional counterweight provides exceptional lifting and loading capabilities.



GET QUIET ▲ with an optional sound package lowers noise levels, making a day in the cab more comfortable.




EASY MAINTENANCE ▲ easy with a tilt-back ROPS/FOPS structure and two hinged doors on the rear providing access to the engine, control valve and cooling system.



OFFSET LOAD-ARM ▲ design creates a wider operator's compartment, and an optional suspension seat adds even more comfort.

SPECIFICATIONS

		2044
DIMENSIONS	A. Overall Operating Height - Fully Raised (mm)	143.5" (3645)
	B. Height to Hinge Pin - Fully Raised (mm)	112" (2845)
	C. Overall Height to Top of ROPS (mm)	77.7" (1974)
	D. Ground Clearance to Chassis (mm)	7.5" (191)
	E. Overall Length with Bucket (mm)	123.5" (3137)
	F. Overall Length without Bucket (mm)	95" (2413)
	G. Wheelbase (mm)	36.7" (932)
	H. Dump Reach at Full Height (mm)	25.7" (654)
	I. Bucket Rollback at Ground	28°
	J. Dump Angle	32°
	K. Overall Width (mm)	59" (1499)
	L. Bucket Width (mm)	61.5" (1562)
	M. Clearance Circle - Rear (mm)	50.5" (1283)
	N. Clearance Circle - Front without Bucket (mm)	39.3" (997)
	O. Clearance Circle - Front with Bucket (mm)	73" (1854)
	P. Seat to Ground Height (mm)	34.6" (879)
	Q. Rollback at Full Height	100°
	R. Dump Height (mm)	88.2" (2242)
	S. Departure Angle	24°
ENGINE	Standard Specification Tire Size	10.00 x 16.5 HD
	Make	Yanmar
	Model	4TNV88 - Interim Tier IV
	Power (kW) @ rpm	46 hp (34.2) @ 2600
	Displacement (L)	134 cu.in. (2.2)
	Maximum Torque (Nm) @ rpm	106 ft.-lbs. (145) @ 1680
HYDRAULIC SYSTEM	Auxiliary Hydraulics - Standard (L/min)	18.5 gpm (70)
	System Relief Pressure (bar)	2350 psi (162)
	Reservoir Capacity (L)	12 gal. (45)
CAPACITIES / WEIGHT	Rated Operating Capacity ^A (kg)	1450 lbs. (658)
	With Optional Counterweight ^A (kg)	1550 lbs. (703)
	Tipping Load (kg)	2900 lbs. (1315)
	Fuel Tank (L)	14.3 gal. (54.1)
	Travel Speed - Maximum (km/hr)	6.6 mph (10.6)
	Operating Weight ^B - Approximate (kg)	5623 lbs. (2551)

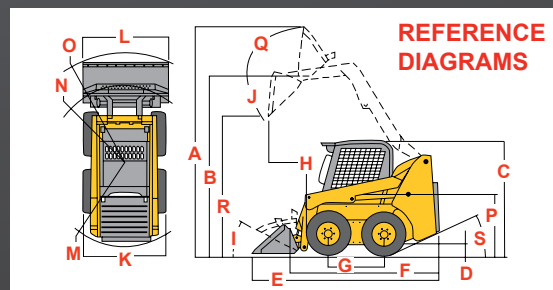

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank



For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

1-800-628-0491

or visit mustangmfg.com

West Bend, WI USA
Tel: 262-334-9461
Fax: 262-338-7517