

DUMPER

8500



officine
PICCINI®


DUMPER

8500

Informazioni tecniche
Technical information
Informations techniques
Informaciones técnicas



MOTORE	ENGINE	MOTEUR	MOTOR	JOHN DEERE Powertech 4045
POTENZA A 2500 GIRI / MIN	POWER AT 2500 RPM	PUISSANCE A 2500 T / MIN	POTENCIA A 2500 R / MIN	80/60 (HP / kW)
TRASMISSIONE	TRANSMISSION	TRANSMISSION	TRASMISION	
Idrostatica	Hydrostatic	Hydrostatique	Hidrostática	☒
4 Ruote motrici	4 wheel-drive	4 roues motrices	4 ruedas motrices	☒
2 marce idrostatiche + 2 meccaniche	2 hydrostatic speeds + 2 mechanical	2 vitesses hydrauliques + 2 mécaniques	2 velocidades hidrostática +2 mecánica	☒
Velocità massima	Max. speed	Vitesse maxi.	Velocidad máxima	28 Km / h
STERZO	STEERING	DIRECTION	DIRECCION	
Ruote sterzanti	Steering wheels	Roues directrices	Ruedas de dirección	4
Servo sterzo	Power steering	Direction assistée	Dirección hidráulico	☒
3 modalità di sterzata	3 steering modes	3 modes de direction	3 tipos de dirección	☒
Raggio di sterzata (interno / esterno)	Steering radius (internal/external)	Rayon de virage (intérieur / extérieur)	Radio de vuelta (interior / exterior)	1.85 / 3.85 m
FRENI	BRAKES	FREINS	FIPENOS	
Dischi multipli in bagno d'olio	Oil immersed multiple disks	Disques multiples en bain d'huile	Discos múltiples en baño de aceite	☒
Comando idraulico	Hydraulically operated	Comando hydraulique	Comande hidráulico	☒
PNEUMATICI	TYRES	PNEUS	NEUMATICOS	14.5 / 20 Tractor
MASSA	WEIGHT	POIDS	PESO	
Tara	Net weight	Tare	Tara	4940 Kg.
Massa totale	Gross weight	Poids maximum	Peso máximo	13440 Kg.
TELAIO SOVRADIMENSIONATO	HEAVY DUTY CHASSIS	CHASSIS RESISTANT	CHASIS RESISTENTE	☒
BENNA DI CARICO	SKIP	BENNE DE CHARGEMENT	CUCHARA	
Scarico idraulico	Hydraulic tilting controls	Déversement hydraulique	Descargo hidráulico	☒
Portata massima	Payload	Capacité de charge maxi	Capacidad de carga máxima	8500 Kg.
CAPACITA' BENNA	SKIP CAPACITY	CAPACITE' BENNE	CAPACIDAD CUCHARA	
In acqua	Water	En eau	En agua	3090 Lt.
O colmo	Heaped	En dôme	A colmo	4890 Lt.
A raso	Stuck	A ras	Al ras	3700 Lt.
POSTO DI GUIDA	DRIVER SEAT	SIEGE DE CONDUCTEUR	ASIENTO DE CONDUCTOR	
Completa visibilità in tutte le direzioni	Full around visibility	Complet visibilité	Visibilidad integral	☒
Tettuccio di protezione	Overhead protection	Toit de protection	Techo de protección	☒
Sedile con molleggio	Suspension seat	Siège avec suspension	Asiento con suspensión	☒

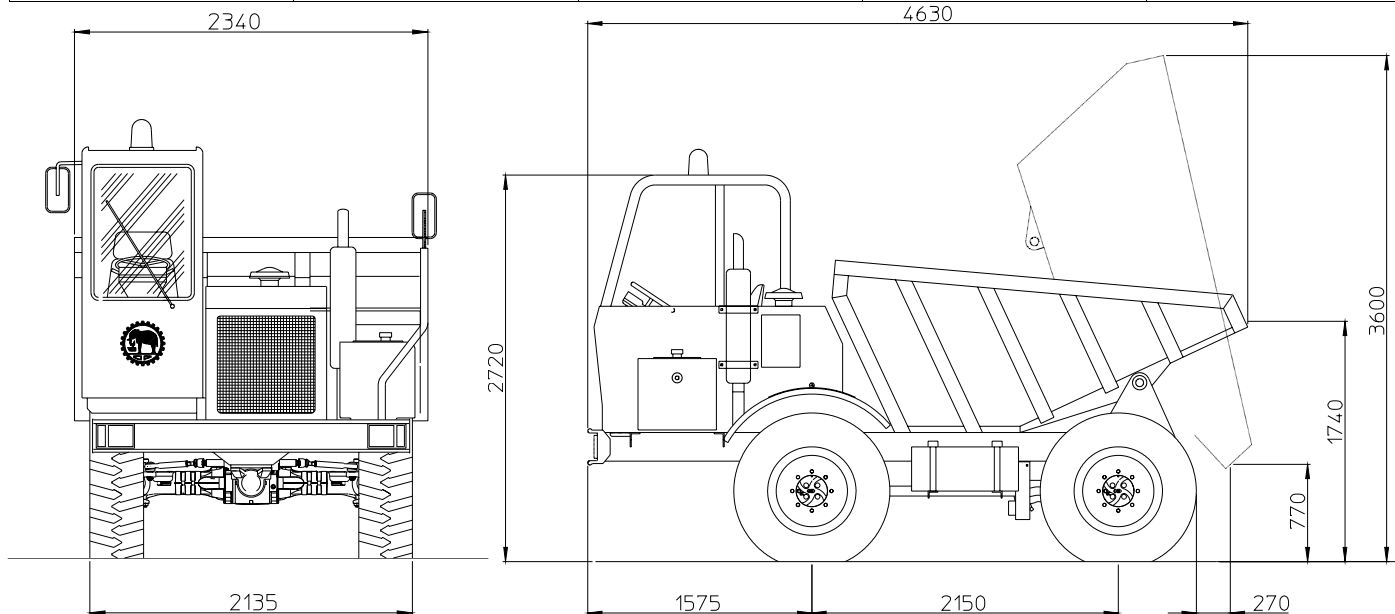

S.S. Trasimeno Ovest 161/c
06132 Perugia - Italy
Tel. +39 075 51801 - Fax +39 075 5179166
Web Site: www.officinepiccini.it
E-Mail: info@officinepiccini.it

Vendite Italia
Assistenza
Export Sales
Service

075 5180239
075 5180221
+39 075 5180240
+39 075 5180221

I dati contenuti in questo catalogo sono forniti a titolo indicativo. Il costruttore può apportare in qualunque momento modifiche ai modelli descritti in questo catalogo, per ragioni di natura tecnica o commerciali. Le illustrazioni di questo documento non mostrano necessariamente il prodotto in versioni standard. Per ulteriori informazioni, il cliente è pregato di rivolgersi al più vicino Concessionario.
All the data in this catalogue are not binding the manufacturer in any way. The manufacturer can modify at any moment the machines shown in this catalogue for commercial or technical reasons. The pictures shown in this catalogue don't show only the standard versions of the products. For more detailed information please contact the nearest dealer.