

# REYNOLDS®

## PivotDUMP Carry-All SCRAPER 18CS14



■ Efficient, self loading bucket design. Reinforced cutting blade support. Three piece Alloy Steel blade. Standard 48" center blade Stinger for hard soils.

■ Individually mounted wheels with (6) tires 17.5 x 25 16 PR for long service life. Strong carriage with hydraulic cylinder blocks for safe transport and service access.

■ Innovative hydraulic system and heavy duty cylinders designed for precision cuts and even spreading control. Detachable tongue for road transport.

*"America's Preferred Scraper"*

# REYNOLDS®

**REYNOLDS INTERNATIONAL EQUIPMENT, L.P.**  
P.O. Box 550, McAllen, Texas 78505-0550 USA  
[www.reynoldsinternational.com](http://www.reynoldsinternational.com)



# REYNOLDS

## PivotDUMP 18CS14 High Capacity CarryALL SCRAPER

Specifications subject to  
change without notice

### Specifications

■ **capacities** 18 yd<sup>3</sup> (13.7 m<sup>3</sup>) heaped

14 yd<sup>3</sup> (10.7 m<sup>3</sup>) struck

■ **bucket dimensions**

W 168" (4.26m), L 86" (2,18m),

H 45" (1,14m)


■ **transport dimensions**

W 187" (4,75m), L 268" (6,80m),

H 78" (1,98m), Clear. 14" (0,35m)

■ **tires** (6) tubeless construction

service 17.5 x 25 16PR

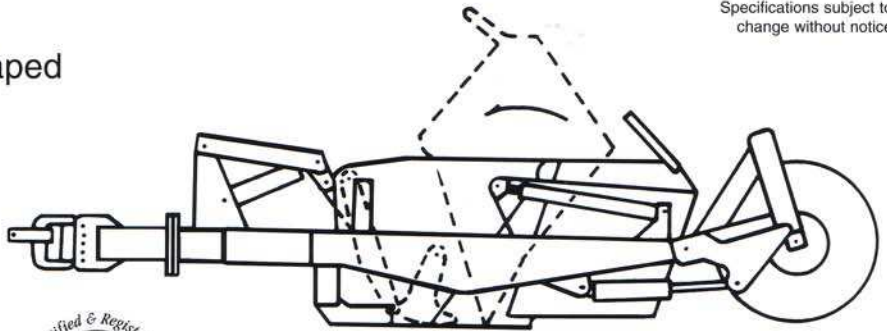

■ **shipping weight est.** 17,000 lb (7727 kg)

### Standard Features

Height adjustable yoke hitch.

Tandem hydraulics and hitch.

Serrated protruding center blade.

### Options

Laser receiver mount bracket.

(6) 17.5 25

Plain level cutting center blade.

### Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

350-450 HP

1 Heavy Duty Cast Iron  
Yoke with grease points.

2 Detachable Tongue for  
ease of road transport.



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com