

REYNOLDS®

Straight Blade FINISHING Scrapers

With years of proven service in LASER leveling fields, road beds, building and construction sites.

model	cutting width
GL - 12	12' (3,65 m)
LS - 14	14' (4,26 m)
LS - 16	16' (4,87 m)
LS - 18	18' (5,48 m)



production features

- skid shoe stabilizers for high speed leveling
- extended back and sides for extra soil capacity
- skid shoe adjustment
- YOKE type hitch option and detachable tongue assy.



"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.

P.O. Box 550, McAllen, Texas 78505-0550 USA

www.reynoldsinternational.com

REYNOLDS®

straight blade **Finishing Scraper**
for agricultural tractors from 80 to 300 HP

Specifications

model number	capacity approximate	width		wheels and tires	shipping weight
cut	transport				
GL - 12	4.0 cu. yd. (3,0 m ³)	12' (3,65 m)	12'-1" (3,68 m)	(4) four 11L x 16	3,800 lb (1,750 Kg)
LS - 14	7.0 cu. yd. (5,3 m ³)	14' (4,26 m)	14'-1" (4,29 m)	(4) four 11L x 16	5,200 lb (2,370 Kg)
LS - 16	8.0 cu. yd. (6,1 m ³)	16' (4,87 m)	16'-1" (4,90 m)	(4) four 11L x 16	5,600 lb (2,550 Kg)
LS - 18	9.0 cu. yd. (6,8 m ³)	18' (5,48 m)	18'-1" (5,51 m)	(4) four 11L x 16	6,000 lb (2,730 Kg)

Options

Laser receiver platform.
Drawbar and yoke hitch.
Skid shoes.



Tractor requirements


■ **Hydraulics** single double acting
circuits 15 GPM (60 liters/min) at
1750 PSI (120 bar)

■ **engine POWER range**

GL-12	80-120 HP
LS-14	160-200 HP
LS-16	200-250 HP
LS-18	250-300 HP



Specifications subject to
change without notice

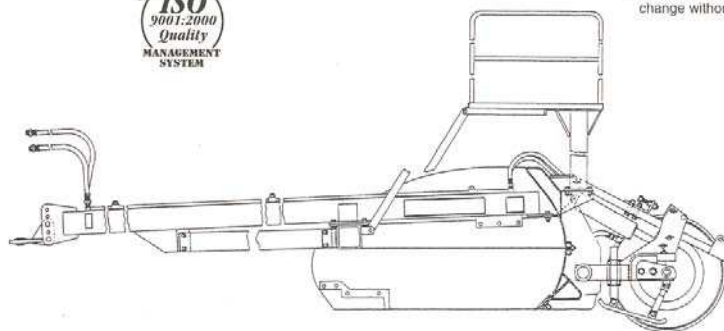

REYNOLDS INTERNATIONAL EQUIPMENT, L.P. P.O. Box 550, McAllen, Texas 78505-0550 USA
Tel. (956) 687-7500 Fax (956) 687-3082, E mail: info@reynoldsinternational.com

Courtesy of Machine.Market