

REYNOLDS®

PivotDUMP™ “CFB” (fixed blade) SCRAPERS (2) Models for Farmers & Contractors



model 15CFB14

“CFB”, Carry-all Fixed Blade scrapers offer you earth moving productivity combined with GPS LASER finishing capacity in one scraper unit.

The Cutting blade is mounted on the scraper frame in a fixed position and hinged to the bucket floor, thus, pivoting the bucket does not affect cutting or spreading height.

Ideal for precision land forming and maintenance of field irrigation and drainage efficiency with a single scraper model.

models and heaped capacity

12CFB12 12 yd³ (9.1 m³)

15CFB14 15 yd³ (11.4 m³)



model 15CFB14

“America’s Preferred Scraper”

REYNOLDS®

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com



PivotDUMP CFB
(fixed blade) SCRAPERS


| Specifications model | capacity | | width | | wheels | shipping | Price Quote |
|-------------------------|--|---|------------------|------------------|--------|-------------------------|----------------|
| | heaped | struck | cutting | transp. | tires | weight | |
| 12CFB12 | 12 yd ³ (9.1 m ³) | 8.6 yd ³ (6.5 m ³) | 144" (3.65 m) | 163" (4.14 m) | 4 | 13.000 lb (5.900 Kg) | |
| 15CFB14 | 15 yd ³ (11.4 m ³) | 10.5 yd ³ (8.0 m ³) | 168" (4.26 m) | 187" (4.75 m) | 6 | 14.200 lb (6.450 Kg) | |

Standard Features

Height adjustable yoke hitch.
Tandem hydraulics and hitch.
Tires 17.5 x 25 (L2) 16 PR.



Specifications subject to change without notice

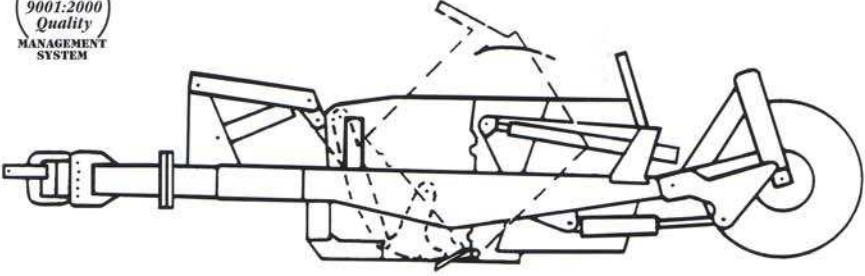

Options


Center frost bit.
Laser receiver mount bracket.
Tractor Drawbar.

Tractor requirements

■ **hydraulics** 25 GPM (100 l/min) at 2500 PSI (175 bar) optimum

■ **engine HP range**

| model | single |
|--------|---------|
| 12 CFB | 180-230 |
| 15 CFB | 300-350 |

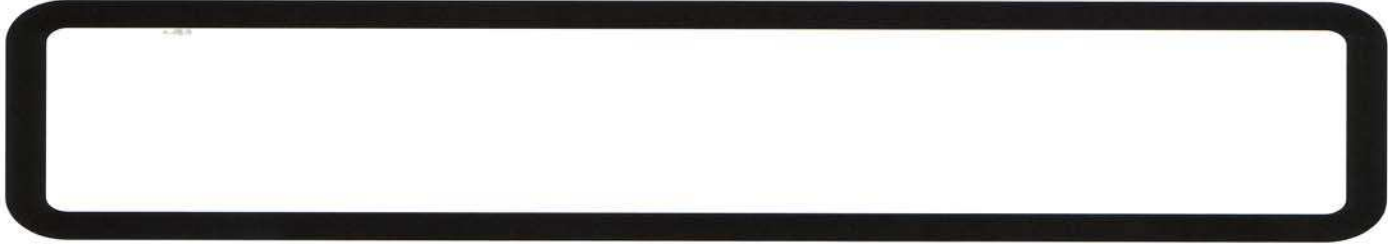

REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA
Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com