

# REYNOLDS®

**PivotDUMP**

## SCRAPER model 17C12

17 yd<sup>3</sup> (13 m<sup>3</sup>), 12 ft (3.65 m) cut



### superior earth moving economics:

#### productivity

■ Easy to load deep bucket design with frost bit on cutting blade to reduce fuel consumption and tractor HP requirements.

#### service life

■ Self-sharpening, reversible cutting blade. Individually mounted wheels with (4) radial or (6) road grader tires.

#### precision cuts

■ Innovative hydraulic controls and heavy duty cylinders are designed for GPS/Laser cuts and fast spreading operation.

# REYNOLDS®

**REYNOLDS INTERNATIONAL, L.P.**  
P.O. Box 550, McAllen, Texas 78505-0550 USA  
[www.reynoldsinternational.com](http://www.reynoldsinternational.com)

# REYNOLDS

# PivotDUMP 17C12 SCRAPER

## Specifications

■ **capacities** 17 yd<sup>3</sup> (13 m<sup>3</sup>) heaped  
13 yd<sup>3</sup> (10 m<sup>3</sup>) struck

■ **bucket dimensions**


W 144" (3.65m), L 96" (2.44m),  
H 45" (1.14m)

■ **transport dimensions**

W 163" (4.14m), L 266" (6.75m),  
H 81" (2.06m), Clear. 13" (0.33m)

■ **tires**

(4) radial tires 20.5R25 VUT

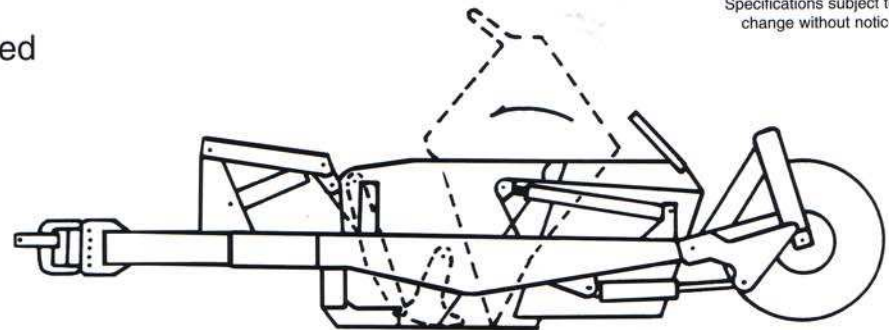

■ **shipping weight est.**

17,000 lb (7710 kg)

## Features

Height adjustable yoke hitch.  
Tandem hydraulics and hitch.

## Options

(6) Road Grader tires 13.00-24.  
Laser receiver mount bracket.  
Gooseneck tongue / dolly assy.  
Drawbar assy. for the tractor.



## Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)  
at 2500 PSI (175 bar)

■ **engine HP range**

one scraper:	250-300 HP
two scrapers:	300-350 HP
three scrapers:	350-400 HP



**REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA**

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: earthmove@aol.com