

REYNOLDS®

model 17E10.5LGP

LGP Low Ground Pressure

high flotation special application **SCRAPERS**



sand & wet material moving with agricultural tractors

productive

■ LGP scrapers are self loading to excavate, transport and spread material with minimum rolling resistance and power requirements.

Reliable

■ Two 43" (1,09m) wide super flotation tires eliminate mud build-up between side walls. Reduced tire rutting improves equipment ground speed.

Operation

■ Reliable hydraulic controls. Multifunction manifold block. Tubing with 37° flare.

"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

model **17E10.5LGP**
17 yd.³ (13 m³) **EJECTOR Scraper**

Specifications

■ **capacities** 17 yd³ (13.0 m³) heaped

17.0 yd³ (10.6 m³) struck

■ **bucket dimensions**

W 126" (3.20m), L 96" (2.43m),

H 55" (1.39m)

■ **transport dimensions**

W 144" (3.65m), L 266" (6.75m),


H 81" (2.05m), Clearance. 20" (0.50m)

■ **tires**

(2) flotation tires 66 x 43-25

■ **shipping weight est.**

23,800 lb (10,818 kg)

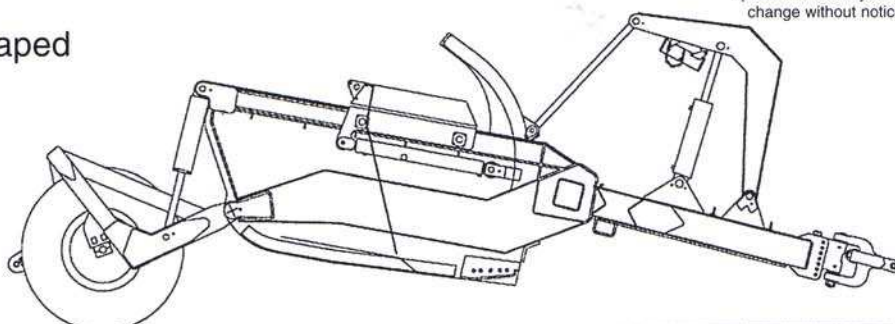

Specifications subject to
change without notice



Features

Multi-Function Valve Block.

Greasable pins, roller bearings.

Safety blocks for hydraulic cylinders


Height adjustable yoke hitch.

Rear lights.

Options

Laser receiver mount bracket.

Tractor draw bars.

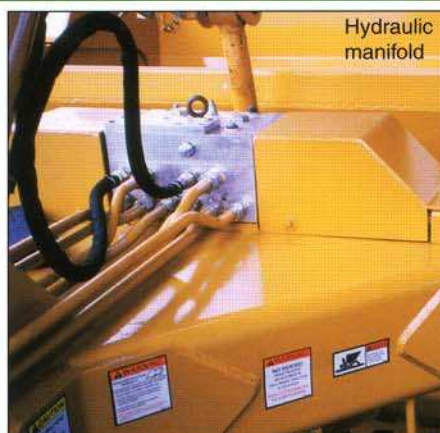

Tractor requirements

■ **hydraulics**

two double acting circuits

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

one scraper: 300-400 HP



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com