

# REYNOLDS®

## model 8C CARRY-ALL Scraper

7 ft (2.13 m) cut width

8 yd<sup>3</sup> (6.1 m<sup>3</sup>) heaped capacity  
5.7 yd<sup>3</sup> (4.3 m<sup>3</sup>) struck capacity



## land forming with agricultural tractors:

### fast loading

■ Low profile bucket with bolted on cutting blade and center frost bit reduce fuel consumption and tractor HP requirements.

### laser leveling

■ Innovative hydraulic controls and heavy duty cylinders are designed for laser precision cuts and fast spreading operation.

### economical

■ Self-sharpening, high carbon steel reversible cutting blades and wear resistant bolt-on side bits are readily available.

# REYNOLDS®

REYNOLDS INTERNATIONAL, L.P.  
P.O. Box 550, McAllen, Texas 78505-0550 USA

[www.reynoldsinternational.com](http://www.reynoldsinternational.com)

# REYNOLDS®

## MODEL 8 C 8 yd<sup>3</sup> CARRY-ALL SCRAPER

### Specifications

■ **capacities** 8 yd<sup>3</sup> (6.1 m<sup>3</sup>) heaped

5.7 yd<sup>3</sup> (4.3 m<sup>3</sup>) struck

■ **bucket dimensions**

W 84" (2.13m), L 86" (2.18m),

H 42" (1.06m)


■ **transport dimensions**

W 99" (2.51m), L 234" (5.94m),

H 72" (1.82m), Clear. 10" (0.25m)

■ **hydraulic cylinder/dia.**

Gate 4", Bucket 3", Frame 4"

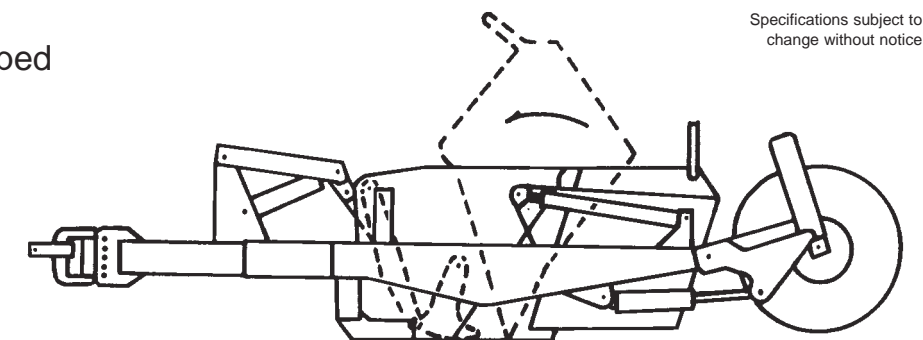

■ **tires** (4) 13.5 x 16.1  
Diamond, 10 PR

■ **shipping weight est.**  
6,800 lb (3090 kg)

### Features

Height adjustable yoke hitch.

Greasable roller bearings.

Tandem hydraulics and hitch.

### Options

Laser receiver mount bracket.

Drawbar assy. for the tractor.

### Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

one scraper: 130-150 HP

two scrapers: 150-180 HP



REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA  
Tel. (956) 687-7500, Fax (956) 687-3082 and (956) 630-5263