

SCATTRAK®

SKID STEER LOADERS

1300D

SKID STEER LOADERS

High Performance

- ▶ High breakout force and axle torque
- ▶ 49.5 hp 4 cylinder diesel engine
- ▶ Powerful 16.4 GPM hydraulic pump to run optional attachments
- ▶ High hinge pin height to reach over walls and truck side boards

Easy Access

- ▶ Forward tilting ROPS/FOPS cab allows quick and easy access to engine/drive train
- ▶ Swing out tailgate, hinged engine cover, lift out floor panel and drive chain access plates for excellent access to all key components

Durable Design

- ▶ Welded unitized frame, modular axles, corrosion resistant loader arm and tilt pins, rugged Quick-Attach system, sealed Teflon bushings and a lubed-for-life universal joint

Operator Comfort

- ▶ Extra wide operator compartment
- ▶ Easy entrance and exit (no center cylinder to step over)
- ▶ Easy-to-read gauge/warning light panel
- ▶ Conventional hand and foot controls standard; wrist action controls optional



1300D



Incorporates rugged components proven in larger SCAT TRAK models.



Standard 16.4 GPM hydraulic pump provides plenty of power for optional attachments.




Ideal for landscape, construction and material handling applications.

SCATTRAK®

SKID STEER LOADERS

1300D

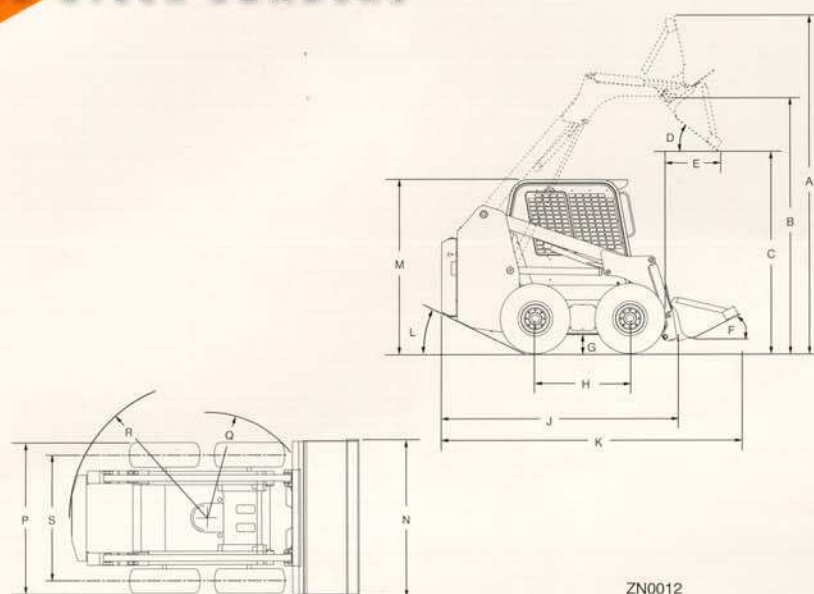

ZN0012

Dimensions

- A. Overall operating height
(with dirt bucket 60" [1524 mm])... 147.5" (3746 mm)
- B. Height to hinge pin 113.0" (2870 mm)
- C. Dump height 89.0" (2261 mm)
- D. Dump angle 36°
- E. Dump reach 24.0" (610 mm)
- F. Maximum roll back 29°
- G. Ground clearance 7.6" (193 mm)
- H. Wheelbase 36.5" (927 mm)
- J. Overall length
(less bucket) 102.25" (2597 mm)
- K. Overall length
(with dirt bucket) 129.5" (3289 mm)
- L. Angle of departure 25.2°
- M. Overall height 77.7" (1974 mm)
- N. Bucket width 60.0" (1524 mm)
- P. Clearance width (less bucket) —
10.00 x 16.5 tires 59.5" (1511 mm)
- Q. Front clearance circle
(with bucket) 74.0" (1880 mm)
- R. Rear clearance circle 62.2" (1580 mm)
- S. Tread width 49.0" (1245 mm)

Engine

Kubota V2203-E
4 cylinder liquid cooled diesel,
49.5 hp (36.9 kW) @ 2800 rpm
Displacement 134 cu in (2.2 liters)
Fuel tank capacity 17.3 gal (65.5 liters)

Travel Speed

Travel range 0-6.4 MPH (0-10.3 km/h)

Operating Specs

Operating capacity 1350 lbs (612 kg)
Tipping load 2700 lbs (1224 kg)
Hydraulic pump flow rate 16.4 GPM (62 liters/min)
Hydraulic reservoir capacity 10 gal (37.8 liters)
*Approx. operating weight 5404 lbs (2451 kg)
*Full fuel tank, 165 lbs (75 kg) operator, 60-in (1524 mm) dirt bucket,
10.00 x 16.5 — 6-ply tires.

Standard Equipment

- ▶ Quick-Attach mounting frame
- ▶ Auxiliary hydraulics with flat face couplers
- ▶ Adjustable seat with 2" seat belt
- ▶ Operator restraint bar
- ▶ Dual travel/steering levers
- ▶ Tilt forward ROPS/FOPS cab
- ▶ Emergency exit rear window
- ▶ Mechanical park lock
- ▶ Loader arm service support
- ▶ Electronic loader arm lockout
- ▶ Dual element air cleaner
- ▶ Quick cycle glow plug start assist
- ▶ Back-up alarm
- ▶ 10.00 x 16.5 — 6-ply flotation tires
- ▶ Lockable doors and covers
- ▶ 12-Volt (525CCA) battery
- ▶ Halogen work lights — two front/one rear
- ▶ Fuel gauge
- ▶ Hourmeter
- ▶ Warning light system
 - ▶ Engine water temperature, engine oil pressure and hydraulic oil temperature with audible alarm
 - ▶ Electrical charging system, air filter restriction indicator, hydraulic filter bypass indicator and pre-heat indicator

Options

- ▶ 7.00 x 15 non-pneumatic solid tires
- ▶ 7.50 x 15 non-pneumatic segmented tires
- ▶ 10.00 x 16.5 — 8-ply heavy duty flotation tires
- ▶ 10.00 x 16.5 non-pneumatic segmented tires
- ▶ 31.00 x 15.5 x 15 — 8-ply super flotation tires
- ▶ Over tire metal tracks
- ▶ 4-point lift hooks
- ▶ Spark arresting muffler
- ▶ Engine block heater
- ▶ Hydraulic reservoir heater
- ▶ In-line engine coolant heater
- ▶ 12-Volt (800CCA) battery
- ▶ Catalytic exhaust purifier
- ▶ Engine air intake pre-cleaner
- ▶ Top window
- ▶ Cab enclosure with heater, defroster and wiper
- ▶ Special applications front door
- ▶ Soft cab enclosure
- ▶ Deluxe seat
- ▶ Amber strobe light
- ▶ Horn
- ▶ 3" seat belt
- ▶ Wrist action hand controls
- ▶ Engine automatic shutdown system

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS THE STANDARD WARRANTY PERTAINING TO A PARTICULAR PRODUCT AND SALE. WE MAKE NO OTHER WARRANTY EXPRESSED OR IMPLIED.

The OmniQuip Family Includes:
**SKYTRAK®, SNORKEL®, LULL®,
and SCATTRAK®**

OmniQuip
Compact
TECHNOLOGIES
An ISO 9001 Registered Company

901 Sunset Road
Port Washington, Wisconsin 53074 USA
(262) 268-3250 Fax: (262) 284-1153
www.compact-technologies.com