


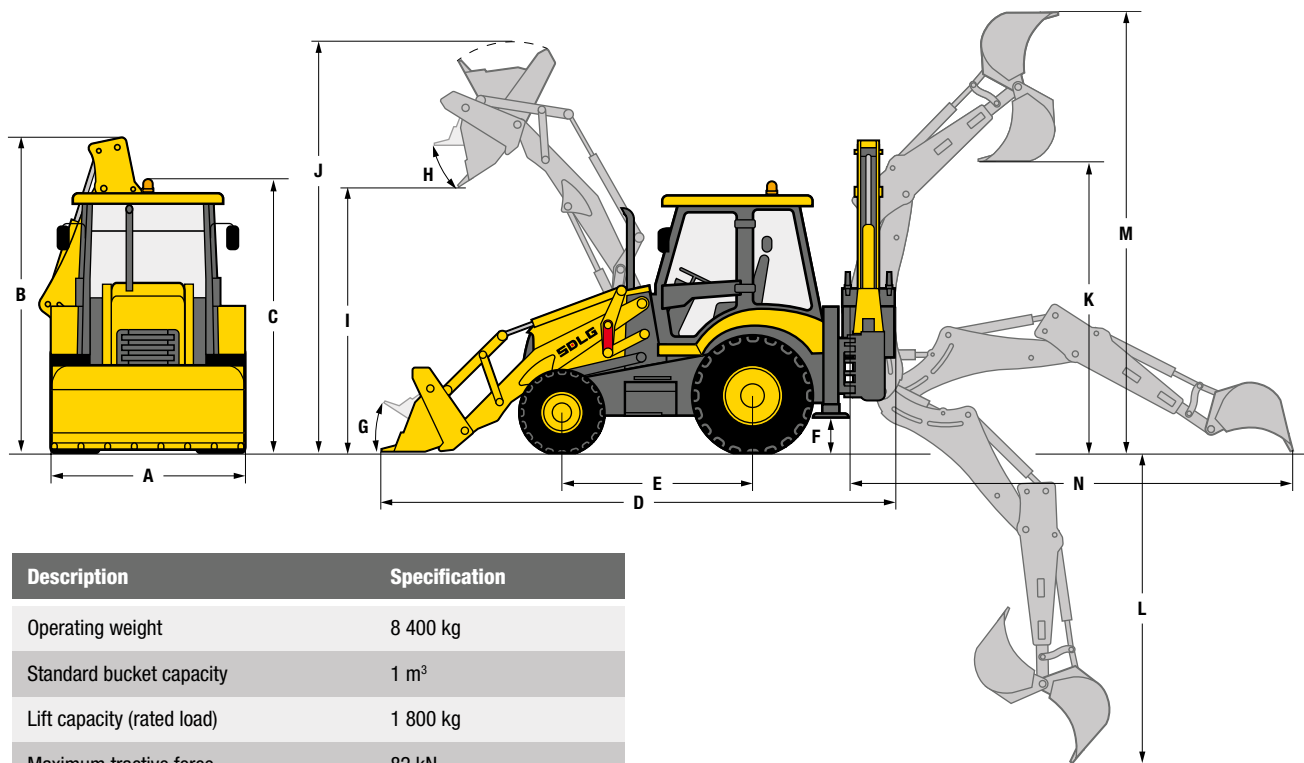

Description	Specification
Operating weight	8 400 kg
Standard bucket capacity	1 m ³
Lift capacity (rated load)	1 800 kg
Maximum tractive force	82 kN
Maximum digging force	50 kN
Maximum breakout force	60 kN
Engine	
Model	Weichai WP4G95
Type	In line, watercooled, 4 stroke, supercharged, direct injection combustion chamber
Rated power	70kW @ 2 200 rpm
Dimensions	
A. Overall width	2 270 mm
B. Overall height	3 599 mm
C. Height to top of cab	3 090 mm
D. Overall length	5 865 mm
E. Wheelbase	2 170 mm
F. Ground clearance	383 mm
G. Roll back angle ground level	45°
H. Dump angle	45°
I. Dump height	2 716 mm
J. Maximum operating height	4 348 mm
K. Loading clearance	3 636 mm
L. Maximum digging depth	4 347 mm
M. Operating height	5 304 mm
N. Reach from swing post ground level	5 356 mm

Description	Specification	
Transmission		
Turbine type	Single stage, single phase, centripetal turbine type	
Transmission type	Synchronised shifting	
Maximum travel speed	40 km/h	
Drive type	4 wheel drive / 2 wheel drive	
Tyre dimension	12.5 - 18 / 18.4 - 26	
Tyre pressure	Front Rear	3.1 MPa 2.2 MPa
Service brake type	Wet brake, limited slip differential	
Parking brake	Disc brake on propeller shaft	
Steering system		
Steering angle	55°	
Steering system pressure	15 MPa	
Service fill capacities		
Fuel	160 L	
Hydraulic oil	190 L	