
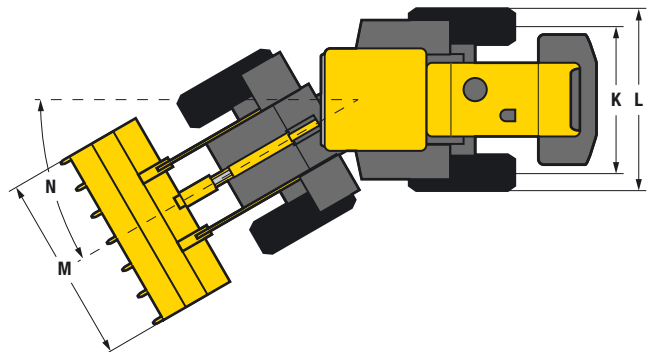


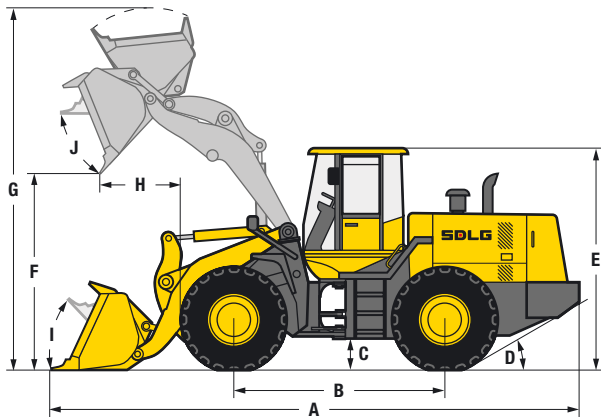

Description	Specification
Operating weight	16 600 kg
Bucket capacity	2.2 ~ 4.5 m ³
Lift capacity (rated load)	5 000 kg
Maximum breakout force	185 kN
Dimensions	
A. Overall length	7 794 mm
B. Wheel base	2 920 mm
C. Ground clearance	534 mm
D. Approach angle back	29°
E. Overall height	3 423 mm
F. Dump height	3 050 mm
G. Overall operating height	5 429 mm
H. Dump reach	1 190 mm
I. Roll back angle ground level	51°
J. Roll back level full height	60°
K. Track width	2 250 mm
L. Machine width	2 845 mm
M. Bucket width	3 024 mm
N. Steering angle	35°
Engine*	
Model	Weichai WD10G220E23
Type	Watercooled, in line, dry cylinder liner, direct injection
Rated power (SAE J1349)	162 kW @ 2000 rpm
Maximum torque	980 Nm

* Engine type may vary according to market

Description	Specification
Transmission	
Type	Planetary power shift
Number of gears	2 forward, 1 reverse
Maximum travel speed	Forward 38 km/h Reverse 17 km/h
Drive type	4 wheel drive
Tyre dimension	23.5 - 25
Tyre pressure	Front 55.1 - 58.0 psi Rear 46.4 - 49.3 psi
Service brake type	Air over hydraulic disc brake
Parking brake type	Manual, caliper disc
Service fill capacities	
Fuel	260 L
Hydraulic oil	240 L
Axles (main and final drives)	52 L
Engine	20 L
Transmission	44 L
Brake system	5 L
Hydraulics	
Type	Mechanical manual control
Boom lift time	5.7 sec
Total cycle time	10.3 sec